

# Vibration sensor

## VIM62PL-E1T16-0ME-I420V14



- Extended temperature range
- Screw-in thread for simple installation
- Simple electrical commissioning
- Rugged stainless steel housing
- Additional output with measured temperature value
- Vibration velocity in mm/s via root mean square formation (rms)


Vibration sensor with analog current output and increased temperature resistance



### Function

The vibration sensor determines the vibration quantity using rms (root mean square) averaging. This form of quadratic averaging or pre-filtering enables precise trend statements about the condition of the application. Furthermore, the vibration sensor has an additional output for the output of the measured temperature value. The sensor's design is impressively robust against tough environmental conditions. The stainless steel housing provides optimal protection against corrosion. The wide temperature range of the sensor enables reliable measured values even in harsh conditions. The simple mounting allows for commissioning in any application.

### Dimensions

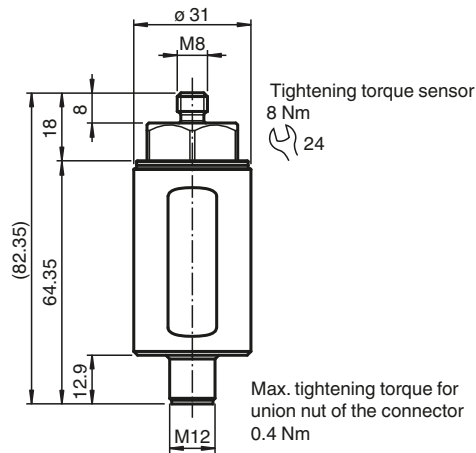

### Technical Data

#### General specifications

Type	Vibration sensor
Measuring technology	MEMS

Release date: 2023-06-01 Date of issue: 2023-06-01 Filename: 70141166-100001\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

## Technical Data

Series	Performance Line	
Measured variable	Vibration velocity Temperature	
Measurement range		
Vibration velocity	v-rms	0 ... 16 mm/s
Temperature	-40 ... 125 °C (-40 ... 257 °F)	
Measurement accuracy	± 0.1 mm/s (calibration point: 90% of the measuring range; 159.2 Hz) Complies with the tolerance requirements of DIN ISO 2954 for measurement range greater than 8 mm/s	
Cross-sensitivity	< 5 % of the partial lateral acceleration, which acts exactly 90° to the measuring axis	
Frequency range	10 ... 1000 Hz	
Averaging time	for v-rms: 2 s	
<b>Electrical specifications</b>		
Fusing	external fuse is required: 3 A , semi-time-lag , 30 V DC	
Operating voltage	U <sub>B</sub>	10 ... 30 V DC
Current consumption	max. 50 mA	
Power consumption	P <sub>0</sub>	max. 750 mW
Time delay before availability	t <sub>v</sub>	10 s (rms filter is calculated initially with measurement data before they are available at the output)
Surge protection	up to 2 kV	
<b>Output 1</b>		
Output type	analog output, current output of the vibration variable	
Output rated operating current	4 ... 20 mA	
Load resistor	≤ 500 Ω	
<b>Output 2</b>		
Output type	analog output, current output of the temperature	
Output rated operating current	4 ... 20 mA	
Load resistor	≤ 500 Ω	
<b>Standard conformity</b>		
Degree of protection	DIN EN 60529, IP66, IP67	
Shock resistance	DIN EN 60068-2-27, 60 g, 6 ms	
Vibration resistance	DIN EN 60068-2-6, 16.5 g, 10 ... 1000 Hz	
<b>Approvals and certificates</b>		
UL approval		
Ordinary Location	E468231 cULus Listed, Class III Power Source and limited energy , if UL marking is marked on the product. For use in NFPA 70 Applications only. adapters providing field wiring on request	
Maximum permissible ambient temperature	max. 60 °C (max. 140 °F)	
<b>Ambient conditions</b>		
Ambient temperature	-40 ... 60 °C (-40 ... 140 °F)	
Measuring head temperature	-40 ... 125 °C (-40 ... 257 °F) directly at the mounting point	
Storage temperature	-40 ... 60 °C (-40 ... 140 °F)	
<b>Mechanical specifications</b>		
Connection type	plug	
Housing material	Stainless steel 1.4305 / AISI 303	
Housing length	82.35 mm	
Housing diameter	31 mm	
Degree of protection	IP66 / IP67 only in connected state	
Connector		
Threading	M12	
Number of pins	4	
Mass	approx. 200 g	


Release date: 2023-06-01 Date of issue: 2023-06-01 Filename: 70141166-100001\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Connection

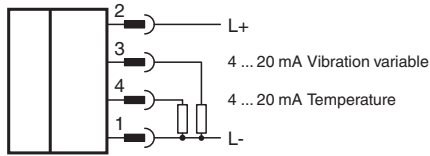

## Connection Assignment



## Installation

### Further Documentation











The sensor manual is also available as detailed overall documentation. Among other things, installation, grounding concepts and mounting are described there in detail.

You can access the manual via the product detail page at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

### Note

The correct electrical connection and the selection of the appropriate grounding concept are crucial for malfunction-free operation of the sensor. For detailed information you may refer to the manual of the sensor.

## Accessories

	<b>V1-G-3M-PUR-ABG0</b>	Female cordset single-ended M12 straight A-coded, 4-pin, PUR cable grey, shielded
	<b>RSL6-CS-SC-M55P200</b>	Protective rubber sleeve for VIM6* vibration sensors against ingress of moisture and mechanical effects
	<b>EMCAD-M08-1,25-M08-1,25/36</b>	EMC adapter for VIM3*/VIM6* vibration sensors, internal thread M8 x 1.25 x 10, external thread M8 x 1.25, screw-in depth 8
	<b>MONAD-M08-1,25-M08-1,25K/368</b>	Mounting adapter for VIM3*/VIM6*/VIM8* vibration sensors, internal thread M8 x 1.25 x 10, external thread M8 x 1.25, screw-in depth 19.5
	<b>MONAD-M08-1,25-M10-1,5/36</b>	Mounting adapter for VIM3*/VIM6* vibration sensors, internal thread M8 x 1.25 x 10, external thread M10 x 1.5, screw-in depth 18
	<b>MONAD-M08-1,25-M30-3,5/368</b>	Mounting adapter for VIM3*/VIM6*/VIM8* vibration sensors, internal thread M8 x 1.25 x 10, external thread M30 x 3.5, screw-in depth 45
	<b>MONAD-M08-1,25-1,2Z-BSPT/36</b>	Mounting adapter for VIM3*/VIM6* vibration sensors, internal thread M8 x 1.25 x 10, external thread NPT1/2", screw-in depth 24
	<b>V1-G-BK5M-PUR-U/ABG0</b>	Female cordset single-ended M12 straight A-coded, 4-pin, PUR cable black, shielded, UL approved, drag chain suitable
	<b>MONAD-M08-1,25-M06-1,0/36</b>	Mounting adapter for VIM3*/VIM6* vibration sensors, internal thread M8 x 1.25 x 10, external thread M6 x 1.0, screw-in depth 10
	<b>MONAD-M08-1,25-M16-2,0/368</b>	Mounting adapter for VIM3*/VIM6*/VIM8* vibration sensors, internal thread M8 x 1.25 x 10, external thread M16 x 2.0, screw-in depth 27

Release date: 2023-06-01 Date of issue: 2023-06-01 Filename: 70141166-100001\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com



USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

**Accessories**

	<b>MONAD-M08-1,25-M20-2,5/368</b>	Mounting adapter for VIM3*/VIM6*/VIM8* vibration sensors, internal thread M8 x 1.25 x 10, external thread M20 x 2.5, screw-in depth 34
	<b>MONAD-M08-1,25-M24-3,0/368</b>	Mounting adapter for VIM3*/VIM6*/VIM8* vibration sensors, internal thread M8 x 1.25 x 10, external thread M24 x 3.0, screw-in depth 40

Release date: 2023-06-01 Date of issue: 2023-06-01 Filename: 70141166-100001\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com **PEPPERL+FUCHS**