

FHDK 14P6901

Diffuse sensors with background suppression - standard

Article number: 11001178

Overview

- background suppression
- 40 ... 200 mm
- pulsed red LED
- PNP
- Teach-in
- cable 4 pin, 2 m
- -25 ... 65 °C
- IP 67



Picture similar



Technical data

General data

Type	Background suppression
Light source	Pulsed red LED
Sensing distance Tw	40 ... 200 mm
Sensing range Tb (at Tw max.)	20 ... 200 mm
Sensing range Tb (at Tw min.)	12 ... 40 mm
Alignment / soiled lens indicator	Flashing light indicator
Light indicator	LED green
Output indicator	LED yellow
Sensing distance adjustment	Teach-in
Wave length	660 nm
Suppression of reciprocal influence	Yes

Electrical data

Response time / release time	< 0.5 ms
Voltage supply range +Vs	10 ... 30 VDC

Electrical data

Current consumption max. (no load)	40 mA
Current consumption typ.	35 mA
Voltage drop Vd	< 1.8 VDC
Output function	Light / dark operate
Output circuit	PNP
Output current	< 100 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

Mechanical data

Width / diameter	14.8 mm
Height / length	43 mm
Depth	32.7 mm
Type	Rectangular
Housing material	Plastic (ASA, MABS)
Front (optics)	PMMA
Connection types	Cable 4 pin, 2 m

Ambient conditions

Protection class	IP 67
Operating temperature	-25 ... +65 °C

Remarks


- Sensitivity adjustable: via Teach-in button or Teach-in wire input

FHDK 14P6901

Diffuse sensors with background suppression - standard

Article number: 11001178

Dimension drawing

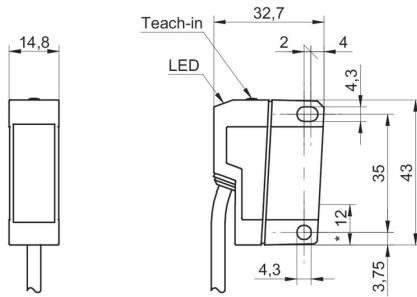

- * emitter axis

Connection diagram

