


KombiSIGN 70 / Audible Devices 844  
**Siren element 8 tne 24VAC/DC BK**



|           |              |
|-----------|--------------|
| Part No.: | 844.126.55   |
| Series:   | KombiSIGN 70 |

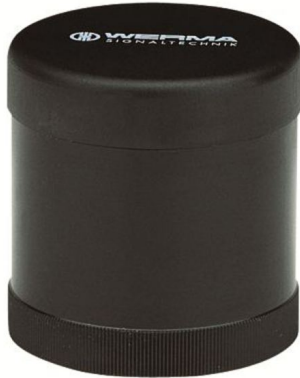

| MECHANICAL DATA             |                 |
|-----------------------------|-----------------|
| Height                      | 72 mm           |
| Diameter                    | 70 mm           |
| Materials                   | PC              |
| Housing colour              | Black           |
| Protection category         | IP54            |
| Service life optical        | 5,000 h minimum |
| Acoustic service life       | 5,000 h minimum |
| Working temperature minimum | -20°C           |
| Working temperature maximum | +50°C           |
| UL Type Rating              | Type 12         |
| Weight with packaging       | 107 g           |
| Product weight              | 92 g            |

| ELECTRICAL DATA             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage type      | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 80 mA              |
| Rated inrush current        | 200 mA             |
| Protection class            | Protection class 2 |
| Pollution degree            | 2                  |

| ACUSTICAL DATA                |            |
|-------------------------------|------------|
| Volume/dB(max) at 1m distance | 100 dB(A)  |
| Acoustic signal image         | Multi-tone |
| Number of tones               | 8 tone     |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / Audible Devices 844

**Siren element 8 tne 24VAC/DC BK**

**DRAWING**

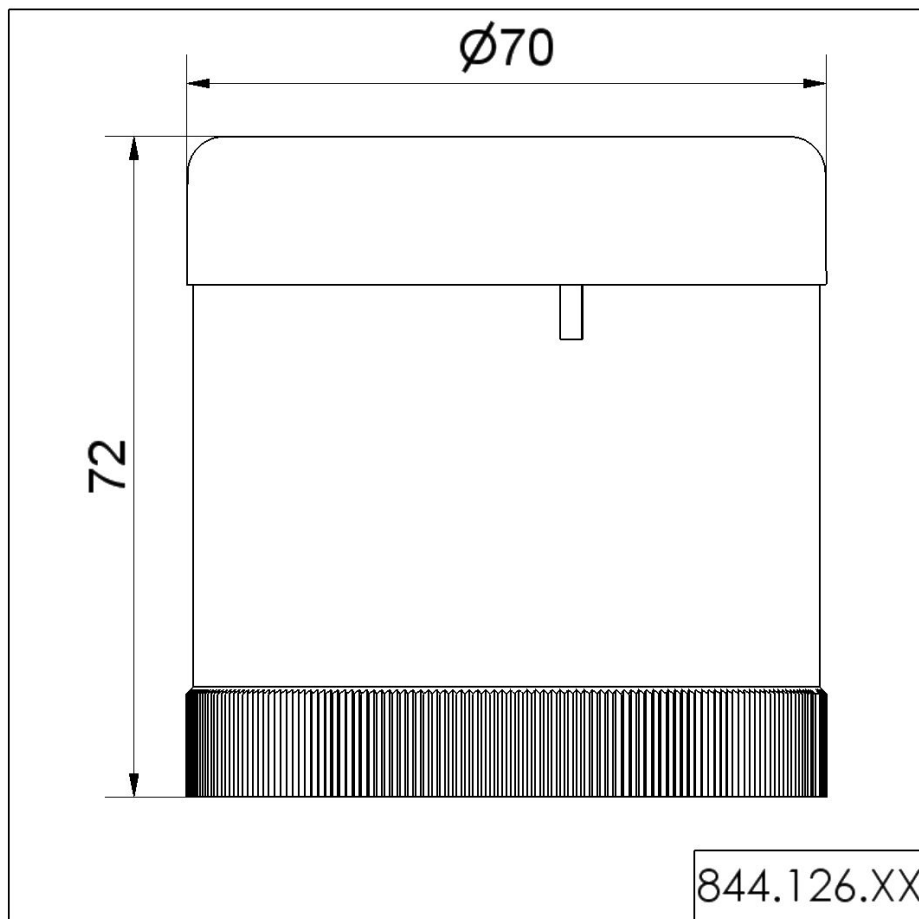

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.