

## O200.GP-GW1J.72CV

Diffuse sensors with background suppression - miniature

Article number: 11210521

### Overview

- Outstanding reliability and unrivalled immunity against ambient light
- Baumer PinPoint LED: Small, homogeneous light spot with sharp edges
- Manipulation-proof, simple teach-in via qTeach or line teach
- IO-Link for extended parameterization options and additional diagnostic data
- Robust housing with stainless steel spacer sleeves



Picture similar



### Technical data

#### General data

Type	Background suppression
Light source	Pulsed PinPoint LED
Sensing distance Tw	20 ... 120 mm
Sensing range Tb	3 ... 132 mm
Smallest object recognizable typ.	0,25 mm at 40 mm
Alignment / soiled lens indicator	Flashing output indicator
Power on indication	LED green
Output indicator	LED yellow
Sensing distance adjustment	Teach-in and IO-Link
Wave length	644 nm
Suppression of reciprocal influence	Yes
Alignment optical axis	< 1,5°

#### Electrical data

Response time / release time	< 0,25 ms (High Speed Mode)
Voltage supply range +Vs	10 ... 30 VDC
Current consumption max. (no load)	40 mA (@ 10 VDC)
Current consumption typ.	16 mA (@ 24 VDC)
Voltage drop Vd	< 2 VDC
Output function	Light / dark operate

#### Electrical data

Output circuit	Push-pull
Output current	< 50 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

#### Communication interface

Baud rate	230,4 kBaud (COM 3)
Adjustable parameters	Switching point Switching hysteresis Time filters LED status indicators Output logic Counter Operation mode Deactivate the sensor element Find Me function Teach-in mode
IO-Link port type	Class A
Process data length	32 Bit
Process data structure	Bit 0 = SSC1 (presence) Bit 2 = quality Bit 3 = alarm Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement
Interface	IO-Link V1.1
Additional data	Excess gain Operating cycles Device temperature

# O200.GP-GW1J.72CV

Diffuse sensors with background suppression - miniature

Article number: 11210521

## Technical data

### Communication interface

Cycle time  $\geq 0,6$  ms

### Mechanical data

Width / diameter	8 mm
Height / length	25,1 mm
Depth	15,8 mm
Type	Rectangular
Mechanical mounting	Sleeve smooth (stainless steel)

### Mechanical data

Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Cable 4 pin, 2 m
Cable characteristics	PVC / PVC 4 x 0,08 mm <sup>2</sup>


### Ambient conditions

Protection class	IP 67
Operating temperature	-25 ... +50 °C


## Remarks

- qTeach


## Dimension drawing

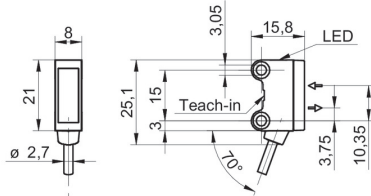


## Connection diagram

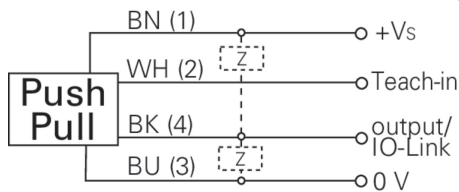

## Beam characteristic (typically)

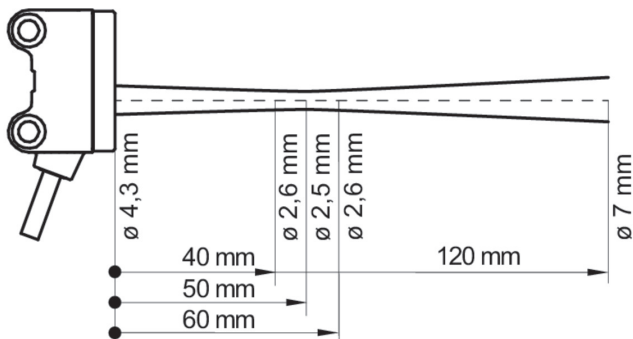

## Sensing distance diagram

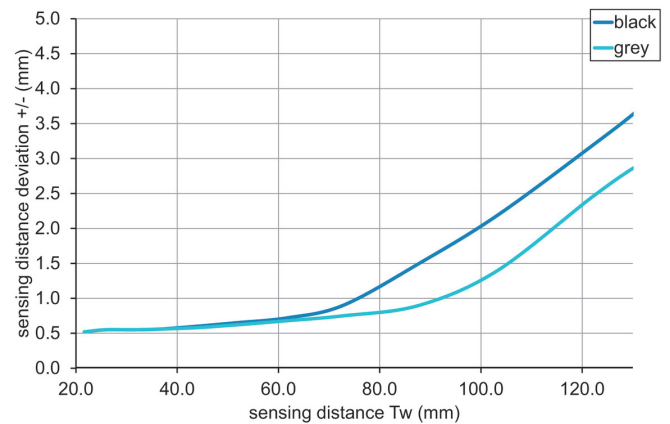

## Hysteresis curve

