

Overview

- SmartReflect - Safe barrier principle without reflector
- Baumer PinPoint LED: Small, homogeneous light spot with sharp edges
- Manipulation-proof, simple teach-in via qTeach or line teach
- IO-Link for extended parameterization options and additional diagnostic data
- Quick mounting by means of M3 threaded bushes made of stainless steel



Picture similar



Technical data

General data		Electrical data	
Type	Light barrier	Output function	Light / dark operate
Version	Standard object detection	Output circuit	Push-pull
Light source	Pulsed PinPoint LED	Output current	< 50 mA
Background position Sde	25 ... 180 mm	Short circuit protection	Yes
Scanning range Sa	90% ... 85% Sde	Reverse polarity protection	Yes
Smallest object recognizable typ.	2,5 mm	Communication interface	
Alignment / soiled lens indicator	Flashing output indicator	Baud rate	230,4 kBaud (COM 3)
Power on indication	LED green	Adjustable parameters	Switching point Time filters LED status indicators Output logic Counter Operation mode Deactivate the sensor element Find Me function Teach-in mode
Output indicator	LED yellow	IO-Link port type	Class A
Sensing distance adjustment	Teach-in and IO-Link	Process data length	32 Bit
Wave length	644 nm	Process data structure	Bit 0 = SSC1 (presence) Bit 2 = quality Bit 3 = alarm Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement
Suppression of reciprocal influence	Yes	Interface	IO-Link V1.1
Alignment optical axis	< 1,5°	Additional data	Excess gain Operating cycles Device temperature
Electrical data			
Response time / release time	< 0,25 ms (High Speed Mode)		
Voltage supply range +Vs	10 ... 30 VDC		
Current consumption max. (no load)	40 mA (@ 10 VDC)		
Current consumption typ.	16 mA (@ 24 VDC)		
Voltage drop Vd	< 2 VDC		

2021-05-06 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

O200.SP-GW1J.72NV/H006

SmartReflect Light barriers - miniature

Article number: 11212658

Technical data

Communication interface

Cycle time $\geq 0,6$ ms

Mechanical data

Width / diameter	8 mm
Height / length	25,1 mm
Depth	15,8 mm
Type	Rectangular
Mechanical mounting	Threaded sleeves M3 (stainless steel)

Mechanical data

Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Flylead connector M8 4 pin, L=200 mm
Cable characteristics	PVC / PVC 4 x 0,08 mm ²

Ambient conditions



Protection class	IP 67
Operating temperature	-25 ... +50 °C

Remarks


- qTeach

Beam characteristic (typically)

Dimension drawing

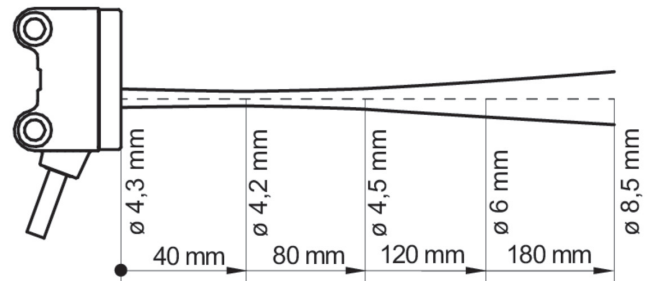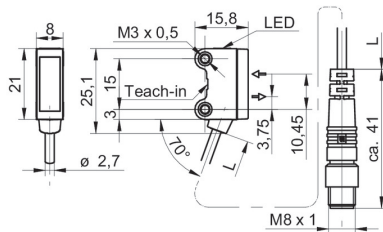

Connection diagram

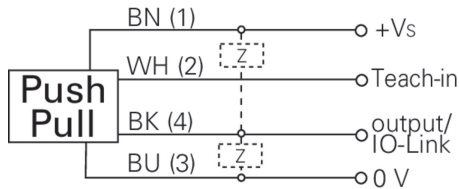

Pin assignment

