

Overview

- Outstanding reliability and unrivalled immunity against ambient light
- Baumer PinPoint LED: Small, homogeneous light spot with sharp edges
- IO-Link interface independent of the switching output (Dual Channel)
- Extended parameterization options and additional diagnostic data
- Robust housing with stainless steel spacer sleeves



Picture similar



Technical data

General data

Type	Background suppression
Version	IO-Link dual channel
Light source	Pulsed PinPoint LED
Sensing distance Tw	20 ... 120 mm
Sensing range Tb	3 ... 132 mm
Alignment / soiled lens indicator	Flashing output indicator
Power on indication	LED green
Output indicator	LED yellow
Sensing distance adjustment	IO-Link
Wave length	644 nm
Suppression of reciprocal influence	Yes
Beam type	Point
Alignment optical axis	< 1,5°

Electrical data

Response time / release time	< 0,4 ms (High Speed Mode)
Jitter	< 0,21 ms (High Speed Mode)
Voltage supply range +Vs	10 ... 30 VDC
Current consumption max. (no load)	45 mA (@ 10 VDC)
Current consumption typ.	16 mA (@ 24 VDC)
Voltage drop Vd	< 2 VDC

Electrical data

Output function	Light / dark operate
Output circuit	Push-pull
Output current	< 50 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

Communication interface

Baud rate	38,4 kBaud (COM 2)
Adjustable parameters	Switching point Switching hysteresis Time filters LED status indicators Output logic Output circuit Counter Operation mode Deactivate the sensor element Find Me function Teach-in mode
IO-Link port type	Class A
Process data length	32 Bit
Process data structure	Bit 0 = SSC1 (presence) Bit 2 = quality Bit 3 = alarm Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement
Interface	IO-Link V1.1

O200.GP-GW2I.72NV/A014

Diffuse sensors with background suppression - miniature

Article number: 11229211

Technical data

Communication interface

Additional data	Excess gain Operating cycles Device temperature
Cycle time	≥ 2,7 ms

Mechanical data

Width / diameter	8 mm
Height / length	25,1 mm
Depth	15,8 mm
Type	Rectangular


Mechanical data

Mechanical mounting	Sleeve smooth (stainless steel)
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Flylead connector M8 4 pin, L=200 mm
Cable characteristics	PVC / PVC 4 x 0,08 mm ²


Ambient conditions

Protection class	IP 67
Operating temperature	-25 ... +50 °C


Dimension drawing

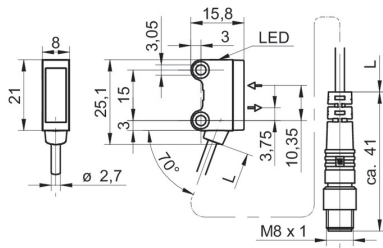


Beam characteristic (typically)

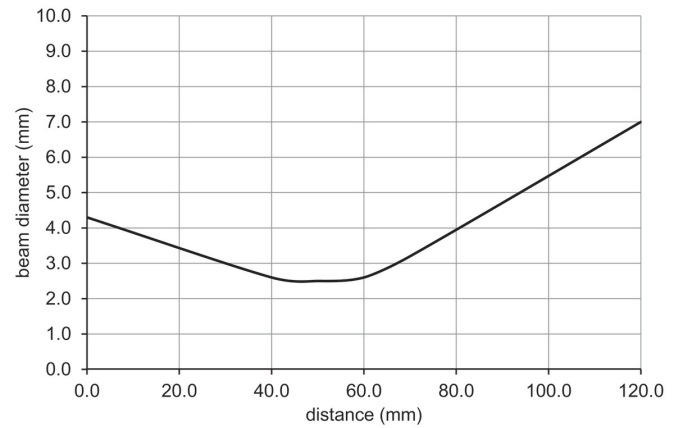


Connection diagram

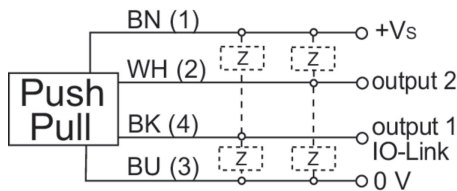

Pin assignment

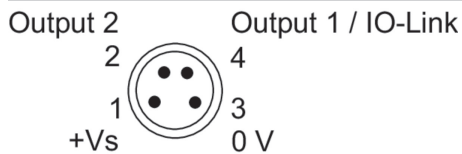

Sensing distance diagram

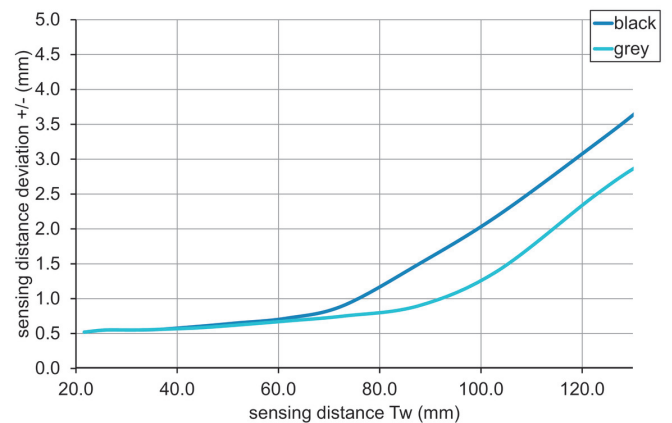

Hysteresis curve

