

Overview

- Most secure object detection due to the barrier principle
- qTeach - tamper-proof, simple teach-in with ferromagnetic tool
- Quick mounting by means of M3 threaded bushes made of stainless steel




Picture similar




Technical data

General data		Electrical data	
Type	Through beam sensor	Current consumption typ.	10 mA (@ 24 VDC)
Emitter / receiver	Receiver	Voltage drop Vd	< 2 VDC
Light source	Use with pulsed red laser diode	Output function	Light / dark operate
Actual range Sb	5 m	Output circuit	NPN complementary
Nominal range Sn	6 m	Output current	< 50 mA
Smallest object recognizable typ.	3 mm (0,5 mm with aperture)	Short circuit protection	Yes
Alignment / soiled lens indicator	Flashing output indicator	Reverse polarity protection	Yes
Output indicator	LED yellow	Mechanical data	
Power on indication	LED green	Width / diameter	8 mm
Sensitivity adjustment	qTeach	Height / length	25,1 mm
Suppression of reciprocal influence	Yes	Depth	14,1 mm
		Type	Rectangular
		Mechanical mounting	Threaded sleeves M3 (stainless steel)
		Housing material	Plastic (ASA, PMMA)
		Front (optics)	PMMA
		Connection types	Flylead connector M8 4 pin, L=200 mm
		Cable characteristics	PVC / PVC 4 x 0,08 mm ²
		Ambient conditions	
Response time / release time	< 0,1 ms < 0,12 ms	Operating temperature	-25 ... +50 °C
Jitter	< 0,03 ms < 0,05 ms	Protection class	IP 67
Voltage supply range +Vs	10 ... 30 VDC		
Current consumption max. (no load)	20 mA (@ 10 VDC)		


Dimension drawing

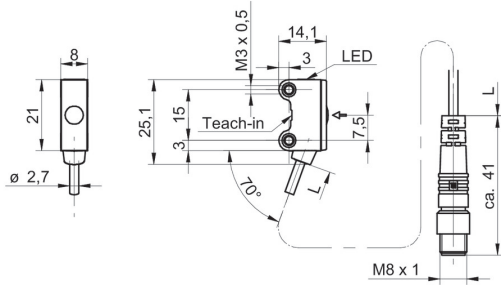

Connection diagram

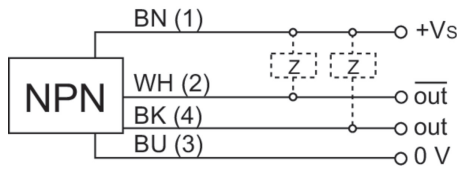

Pin assignment



Excess gain curve

