

Overview

- Extended functional reserve capacities for maximum reliability
- Baumer PinPoint LED: Small, homogeneous light spot with sharp edges
- IO-Link interface independent of the switching output (Dual Channel)
- Extended parameterization options and additional diagnostic data
- Quick mounting by means of M3 threaded bushes made of stainless steel



Picture similar



Technical data

General data		Electrical data	
Type	Retro-reflective sensor	Voltage drop Vd	< 2 VDC
Version	IO-Link dual channel	Output function	Light / dark operate
Light source	Pulsed PinPoint LED	Output circuit	Push-pull
Actual range Sb	3 m	Output current	< 50 mA
Nominal range Sn	4 m	Short circuit protection	Yes
Smallest object recognizable typ.	4 mm (FTAR 013A000)	Reverse polarity protection	Yes
Polarization filter	Yes	Communication interface	
Alignment / soiled lens indicator	Flashing output indicator	Baud rate	38,4 kBaud (COM 2)
Output indicator	LED yellow	Adjustable parameters	Switching point Time filters LED status indicators Output logic Output circuit Counter Deactivate the sensor element Find Me function Teach-in mode
Power on indication	LED green	IO-Link port type	Class A
Sensitivity adjustment	IO-Link	Process data length	32 Bit
Wave length	644 nm	Process data structure	Bit 0 = SSC1 (presence) Bit 2 = quality Bit 3 = alarm Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement
Suppression of reciprocal influence	Yes	Interface	IO-Link V1.1
Electrical data			
Response time / release time	< 0,4 ms		
Jitter	< 0,21 ms		
Voltage supply range +Vs	10 ... 30 VDC		
Current consumption max. (no load)	45 mA (@ 10 VDC)		
Current consumption typ.	16 mA (@ 24 VDC)		

The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

Technical data

Communication interface

Additional data	Signal strength
	Excess gain
	Operating cycles
	Device temperature
Cycle time	≥ 2,7 ms

Mechanical data

Width / diameter	8 mm
Height / length	25,1 mm
Depth	15,8 mm
Type	Rectangular


Mechanical data

Mechanical mounting	Threaded sleeves M3 (stainless steel)
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Flylead connector M8 4 pin, L=200 mm
Cable characteristics	PVC / PVC 4 x 0,08 mm ²


Ambient conditions

Operating temperature	-25 ... +50 °C
Protection class	IP 67


Dimension drawing

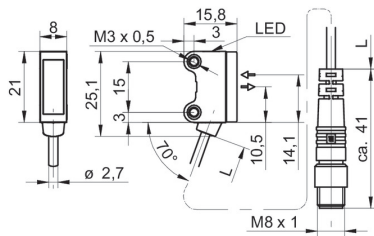


Beam characteristic (typically)

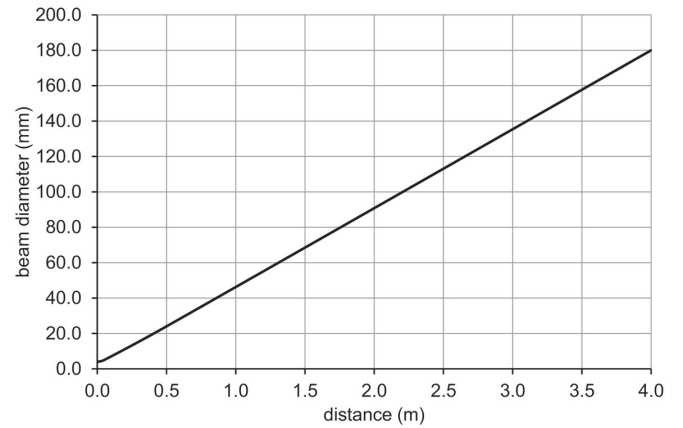


Connection diagram

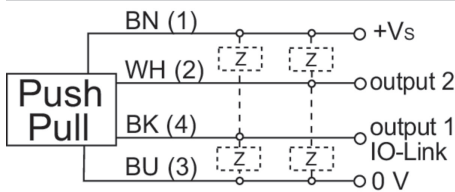


Pin assignment

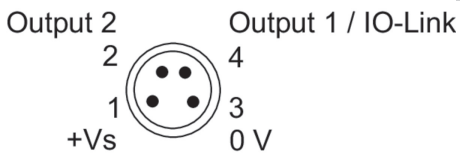

Excess gain curve

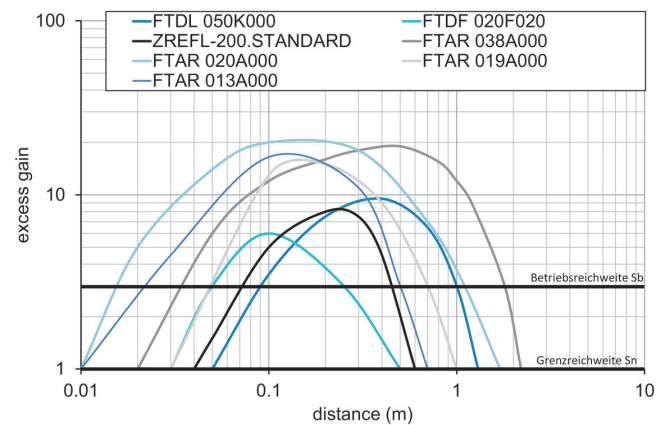

Excess gain curve

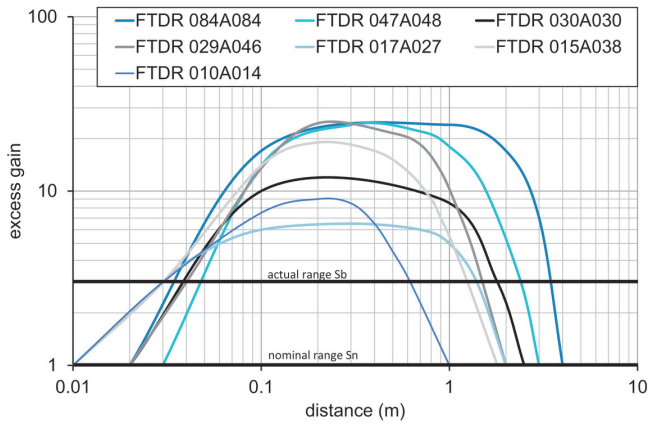

Lateral operating range

