

Overview

- Automatic adjustment of exposure time for precise measurements on changing materials
- High immunity to ambient light for reliable measurements regardless of ambient conditions
- Point beam shape for a precise measurement
- Adjustable filters for particularly stable measurement results



Picture similar



Technical data

General data

| | |
|-----------------------|--------------------------|
| Type | Distance measuring |
| Measuring distance Sd | 16 ... 26 mm |
| Measuring range Mr | 10 mm |
| Adjustment | Teach-in: button / RS485 |
| Power on indication | LED green |
| Output indicator | LED yellow |
| Repeat accuracy | 1 µm |
| Linearity error | ± 0.08 % Mr |
| Beam type | Point |
| Temperature drift | 0,01 % Sde/K |

Light Source

| | |
|---------------------|------------------------|
| Light source | Pulsed red laser diode |
| Wave length | 660 nm |
| Laser class | 1 |
| Maximum pulse power | 1 mW |
| Pulse duration | 0.001 ... 1 ms |
| Pulse period | 0.2 ... 3.4 ms |

Electrical data

| | |
|------------------------------------|---------------|
| Response delay | 0,4 ms |
| Measuring frequency | 5000 Hz |
| Voltage supply range +Vs | 12 ... 28 VDC |
| Current consumption max. (no load) | 100 mA |
| Output circuit | RS485 |
| Short circuit protection | Yes |

Electrical data

| | |
|-----------------------------|----------------|
| Reverse polarity protection | Yes, Vs to GND |
|-----------------------------|----------------|

Communication interface

| | |
|-----------|-------------------|
| Interface | RS485 |
| Baud rate | 57600, adjustable |
| Protocol | Modbus RTU |

Mechanical data

| | |
|------------------|-------------------------|
| Width / diameter | 34,5 mm |
| Height / length | 37 mm |
| Depth | 13 mm |
| Type | Rectangular, front view |
| Housing material | Die-cast zinc |
| Front (optics) | Glass |
| Connection types | Connector M8 4 pin |
| Weight | 41 g |


Ambient conditions

| | |
|-------------------------|---|
| Ambient light immunity | < 100 kLux |
| Operating temperature | -10 ... +50 °C |
| Protection class | IP 67 |
| Storage temperature | -20 ... +60 °C |
| Vibration (sinusoidal) | IEC 60068-2-6:2008 1 mm p-p at f = 10 - 55 Hz, duration 5 min per axis 30 min endurance at f = 55 Hz per axis |
| Shock (semi-sinusoidal) | IEC 60068-2-27:2009 30 g / 11 ms, 6 jolts per axis and direction |


Remarks

- Measurement with Baumer standardized measuring equipment and targets (Measurement on 90% remission (white)). Values of Resolution, linearity error and repeat accuracy apply to a measurement with filter setting (Median: 9, Average: 128).

Dimension drawing

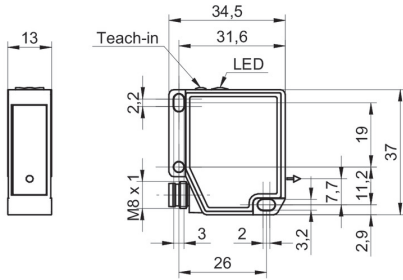

Beam characteristic (typically)

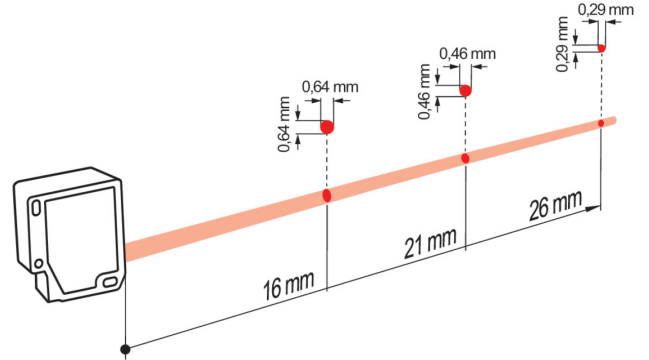


Laser warning

**CLASS 1 LASER
PRODUCT**

IEC 60825-1/2014

Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019

Connection diagram

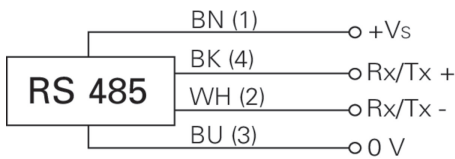

Pin assignment

