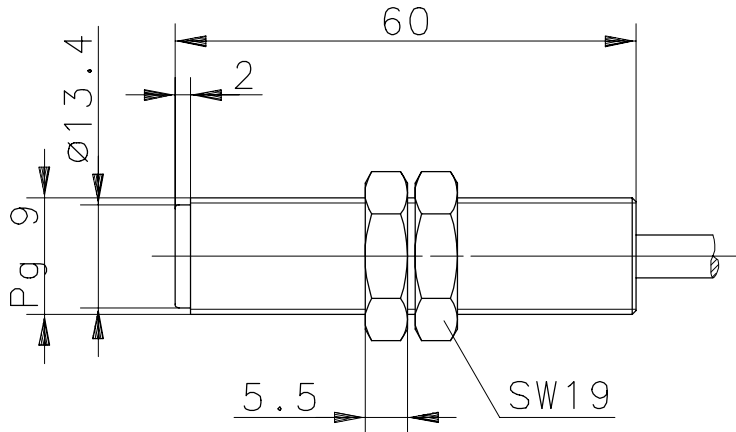



Type: **MAK-1713-K-3**Art.-No.: **641.5317.431**

09.02.99/0211

**Wiring Diagram:****Technical Data**

Max. Voltage : 250 V

Max. Switch Current : 0,5 A

Max. Switching : 30 VA

Mech. Lifetime : 3 x 10⁸ switchings, however, according to the load resetability

Resetability : ± 0,1 mm under same geometrical conditions at the same temperature

Temperature range : -5 °C ... +70 °C

Protection : IP 67 according to IEC 529, EN 60529 (NEMA 4)


Output function : Switch-Over (other functions on request)

Mechanical Features

Housing : PA 6, red; encapsulated reed contact

Connection : Cable 3 x 0,5 mm² x 3 m; PVC – Outer jacket, black (other lengths upon request)

Assembly position : optional (assembly on iron means reduction of switch distance)

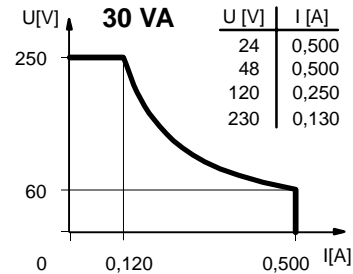Switching diagram

Pay attention to the contact protection when switching inductive loads.