

Safety switch NZ.VZ



- ▶ Housing according to EN 50041



Approach direction

- ▶ Horizontal
- ▶ Adjustable in 90° steps.

AS-Interface inputs

- ▶ **D0, D1** Positively driven contact 1
 - ▶ **D2, D3** Positively driven contact 2
- Evaluation is performed via a safety monitor.

AS-Interface outputs


- ▶ **D1** Red LED
- ▶ **D2** Green LED

LED function display

- ▶ The *Power* LED indicates the operating voltage on the bus.
- ▶ The *Fault* LED indicates if a fault has been detected on the AS-Interface bus.
- ▶ The green and the red LEDs can be controlled as required by the control system via the bus using bits D1 and D2.

Plug connector M12 4-pin

Dimension drawing

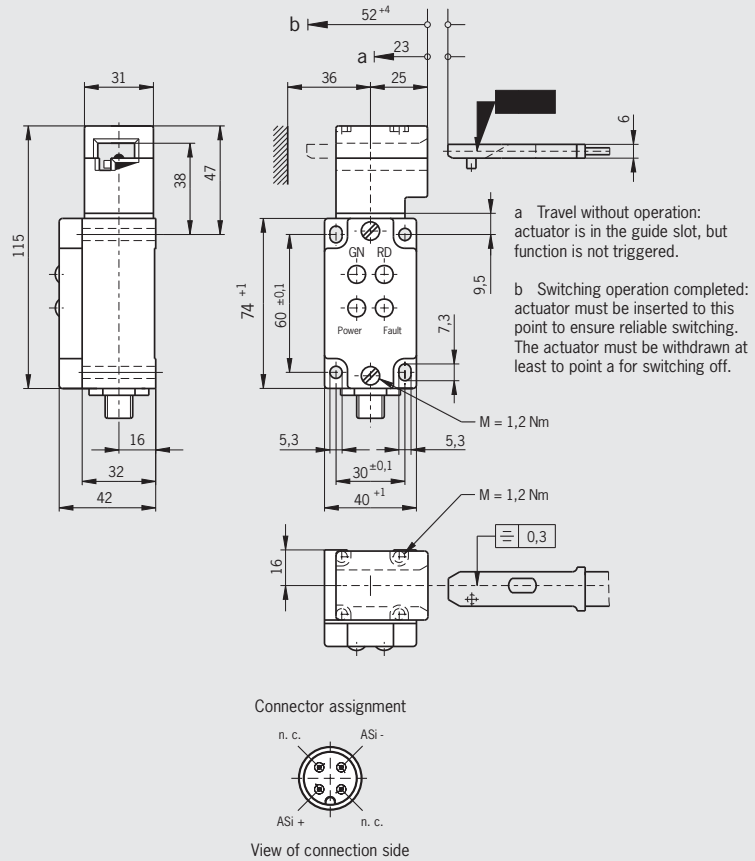

Please order actuator and connection material separately.
For detailed information and suitable accessories, enter the order number for the product in the search box at www.euchner.com.

Ordering table

Series	Connection	Actuator	Switching element	Order no./ item
NZ	SEM 4 Plug connector M12	VZ Separate actuator	2 NC ⇄	090742 NZ2VZ-538ESEM4-AS1