

KombiSIGN 70 / AS-Interface-Device

AS-Interface-Module - A/B technology BK



Part No.:	840.810.55
Series:	KombiSIGN 70



MECHANICAL DATA	
Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Black
Protection category	IP54
Service life optical	50,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	120 g
Product weight	98 g



ELECTRICAL DATA	
Operating voltage	18,5 - 31,6V (ASi)
Rated operational current	210 mA
Protection class	Protection class 2
Pollution degree	3
Request to external PSU	PELV
AS-i Slave Type	A/B
AS-i Profile	S-8.A.E

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / AS-Interface-Device

AS-Interface-Module - A/B technology BK

DRAWING

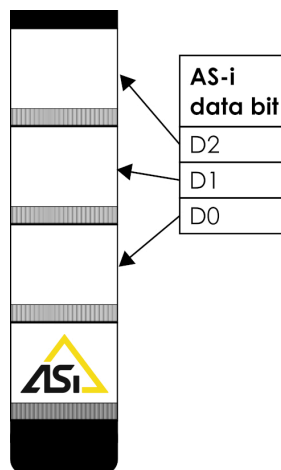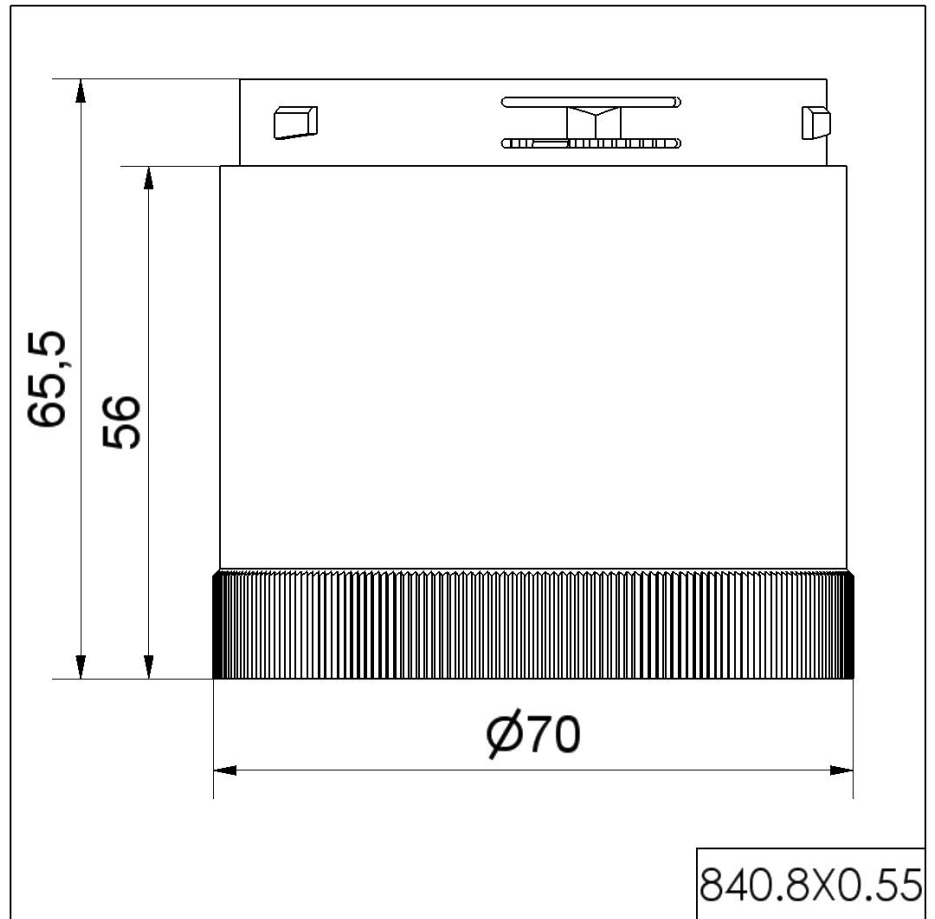

	Supply internal (BUS)	Supply external (AUX)
Voltage	18,5-31,6 V PELV	20-30 V DC PELV
Output current	Σ 200 mA	300 mA per tier
Supply (BUS/AUX)	switchable	
Master profile	min. M3	



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.