

KombiSIGN 70 / AS-Interface-Device

AS-Interface Module - standard technolog



Part No.:	840.830.55
Series:	KombiSIGN 70



MECHANICAL DATA

Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Black
Protection category	IP54
Service life optical	50,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	118 g
Product weight	100 g

ELECTRICAL DATA

Operating voltage	18,5 - 31,6V (ASi)
Rated operational current	210 mA
Protection class	Protection class 2
Pollution degree	3
Request to external PSU	PELV
AS-i Slave Type	Standard
AS-i Profile	S-8.F





For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / AS-Interface-Device

AS-Interface Module - standard technolog

DRAWING

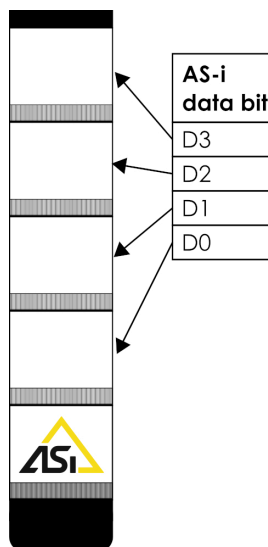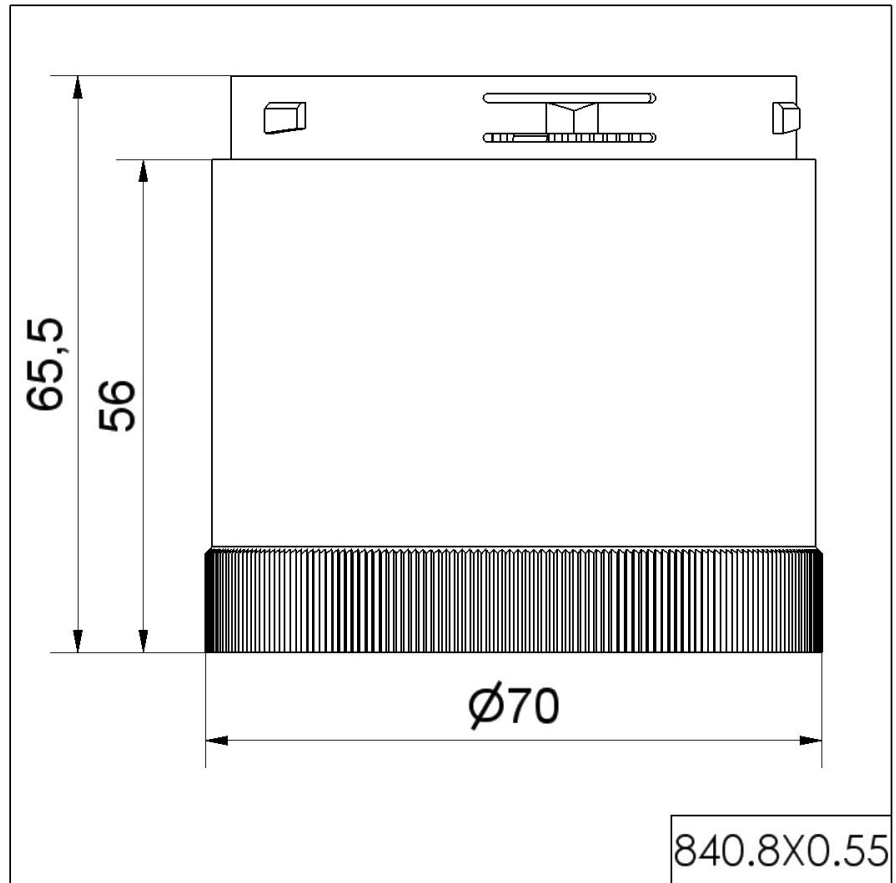

	Supply internal (BUS)	Supply external (AUX)
Voltage	18,5-31,6 V PELV	20-30 V DC PELV
Output current	Σ 200 mA	300 mA per tier
Supply (BUS/AUX)	switchable	
Master profile	min. M1	

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.