



Figure can vary

Part no.: 547931
MSI-TRMB-01
Safety relay



Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Notes

Part no.: 547931 – MSI-TRMB-01 – Safety relay

Technical data

Basic data	
Series	MSI-TRM
Functions	
Functions	Start/restart interlock (RES)
Restart	Automatic Manual
Characteristic parameters	
Type	4 , IEC/EN 61496
SIL	3 , IEC 61508
SILCL	3 , IEC/EN 62061
Performance Level (PL)	Up to and including e , EN ISO 13849-1
MTTF _d	100 years , EN ISO 13849-1
PFH _D	0.0000000215 per hour
PFH _D	2.15E-09 per hour
Mission time T _M	20 years , EN ISO 13849-1
Category	4 , EN ISO 13849
Electrical data	
Protective circuit	Polarity reversal protection Short circuit protected
Performance data	
Supply voltage U _B	24 V , DC , -20 ... 20 %
Current consumption, max.	200 mA
Power consumption, max.	3 W
Residual ripple	0 ... 15 %
Fuse	External with max. 3 A
Inputs	
Number of safety-related switching inputs	2 Piece(s)
Number of digital switching inputs	2 Piece(s)
Switching inputs	
Type	Digital switching input
Switching voltage high, min.	18.2 V
Switching voltage low, max.	2.5 V
Switching voltage, typ.	23 V
Voltage type	DC
Digital switching input 1	
Function	Control input for start/restart interlock (RES)
Digital switching input 2	
Function	Control input for start/restart interlock (RES)
Safety-related switching inputs	
Type	Safety switching input
Voltage type	DC
Switching voltage high, min.	18.2 V
Switching voltage low, max.	2.5 V
Switching voltage, typ.	23 V

Part no.: 547931 – MSI-TRMB-01 – Safety relay

Outputs

Number of safety-related switching outputs (OSSDs)	2 Piece(s)
Number of digital switching outputs	3 Piece(s)

Safety-related switching outputs

Type	Safety-related switching output OSSD
Voltage type	AC/DC

Safety-related switching output 1

Switching element	Relay , NO
-------------------	------------

Safety-related switching output 2

Switching element	Relay , NO
-------------------	------------

Switching outputs

Type	Digital switching output
Switching voltage high, min.	18.2 V
Switching voltage low, max.	2.5 V
Switching voltage, typ.	23 V
Voltage type	DC

Switching output 1

Switching element	Transistor , PNP
Function	Switching output

Switching output 2

Switching element	Transistor , PNP
Function	Switching output

Switching output 3

Switching element	Transistor , PNP
Function	"Error" signal output

Timing

Response time	30 ms
Sensor response time on test request	0.5 ... 8.5 ms

Connection

Number of connections	1 Piece(s)
-----------------------	------------

Connection 1

Type of connection	Terminal
Function	Connection to receiver Connection to transmitter Voltage supply
Type of terminal	Screw terminal
No. of pins	16 -pin

Cable properties

Connection cross sections	0.2 to 1.5 mm ²
---------------------------	----------------------------

Mechanical data

Dimension (W x H x L)	22.5 mm x 99 mm x 114.1 mm
Housing material	Plastic , Unreinforced polyamide PA
Net weight	155 g
Housing color	Gray
Type of fastening	Snap-on mounting

Operation and display

Part no.: 547931 – MSI-TRMB-01 – Safety relay

Type of display	LED
Number of LEDs	6 Piece(s)

Environmental data

Ambient temperature, operation	-25 ... 55 °C
Ambient temperature, storage	-25 ... 75 °C
Relative humidity (non-condensing)	0 ... 75 %

Certifications


Degree of protection	IP 20 (housing) IP 20 (terminals)
Protection class	III
Certifications	c UL US

Classification

Customs tariff number	85371098
eCl@ss 8.0	27371819
eCl@ss 9.0	27371819
ETIM 5.0	EC001449
ETIM 6.0	EC001449

Dimensioned drawings

All dimensions in millimeters

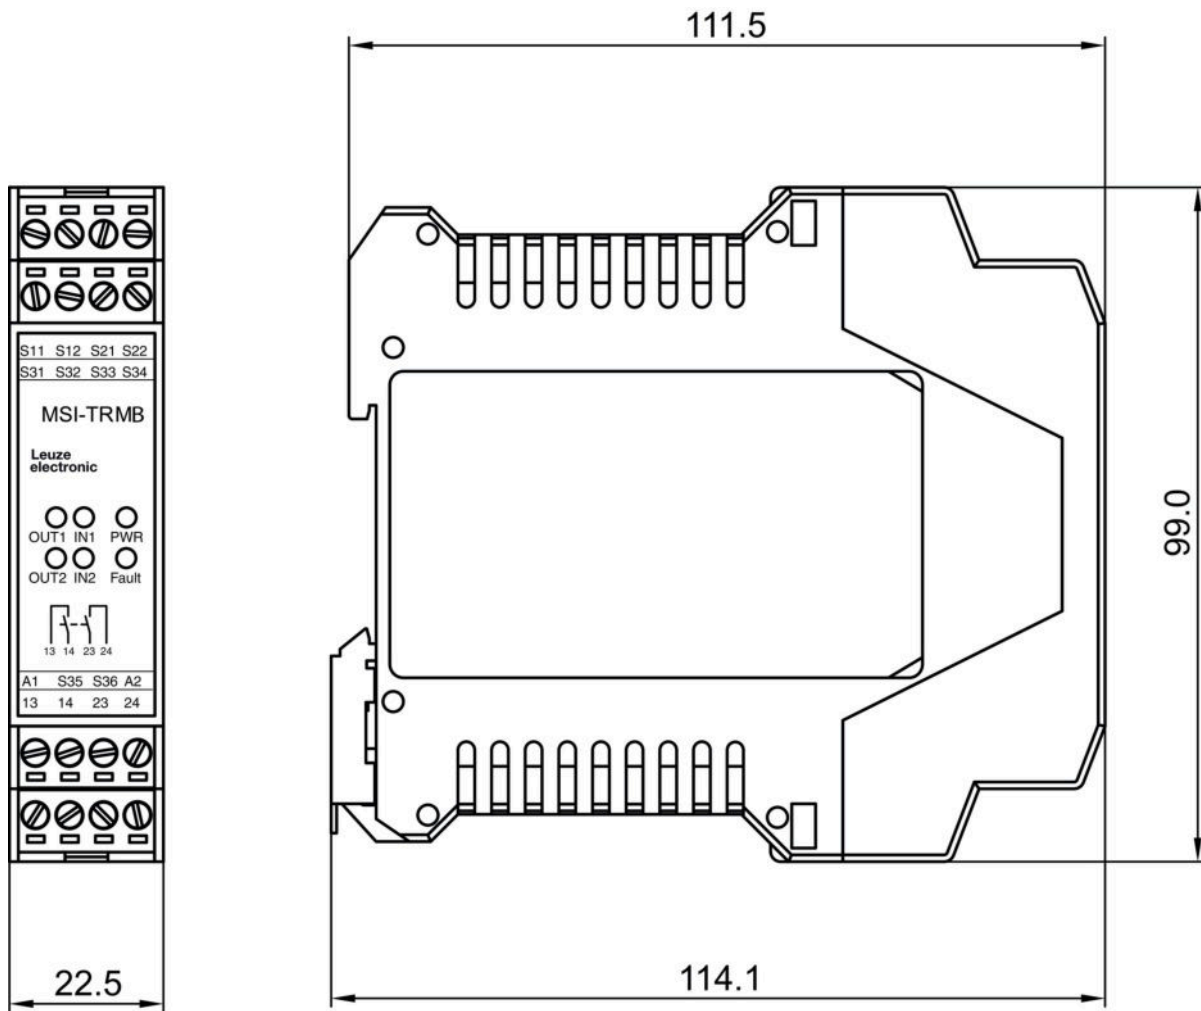

Electrical connection

Connection 1	
Type of connection	Terminal
Function	Connection to receiver Connection to transmitter Voltage supply
Type of terminal	Screw terminal
No. of pins	16 -pin

Terminal	Assignment
S11	OUT 1
S12	IN1
S21	OUT 2
S22	IN1
S31	ERROR
S32	n.c.
S33	RES/Start
S34	RES/Start
A1	+24V
S35	WA

Part no.: 547931 – MSI-TRMB-01 – Safety relay

Terminal	Assignment
S36	WA
A2	GND
13	OSSD1
14	OSSD1
23	OSSD2
24	OSSD2

Notes

Observe intended use!

- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.