




TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3	HA-H1
H4-H2	HA-H2
240	480
208	460
230	440
220	420
	23
	110

NOTE: IF BOTH OUTPUTS ARE USED SIMULTANEOUSLY, FUSING SHOULD BE DONE OFF OF THE TRANSFORMER, WITH X3 REPLACING XF


CONNECTION TABLE LABEL

Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	200
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	9.5 LBS

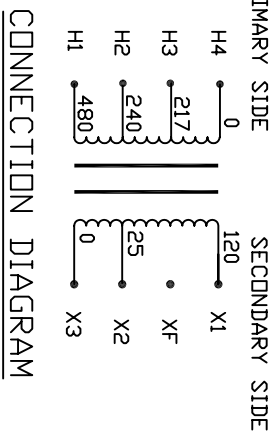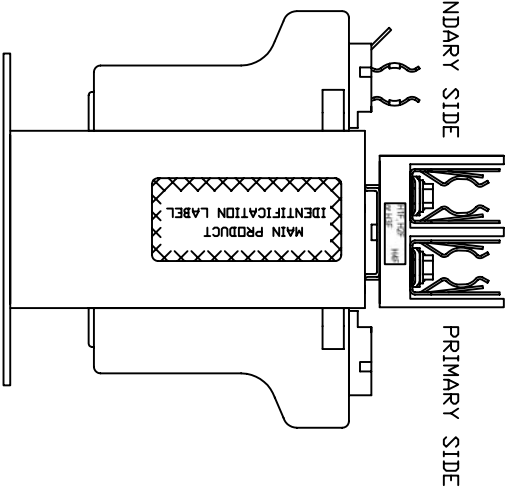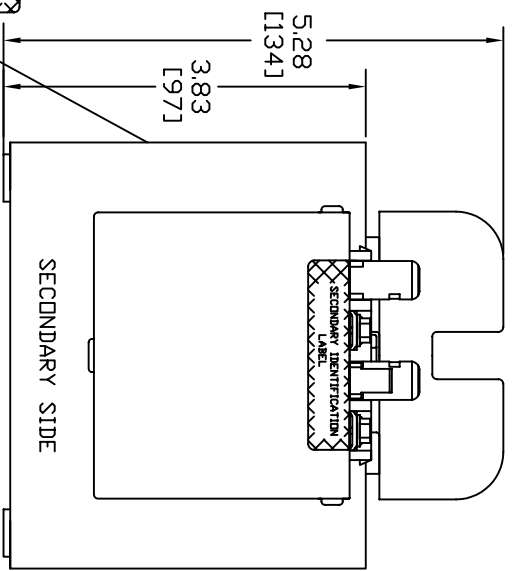


- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)


MAIN PRODUCT IDENTIFICATION LABEL

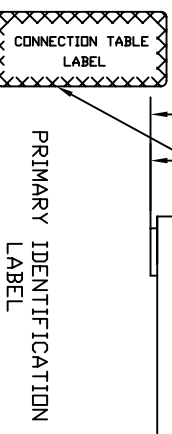

MOVE LEAD H TO SELECT INPUT VOLTAGE

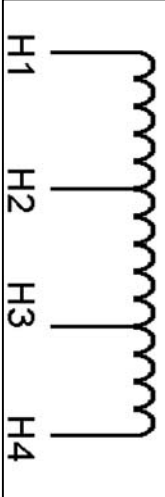

SECONDARY IDENTIFICATION LABEL

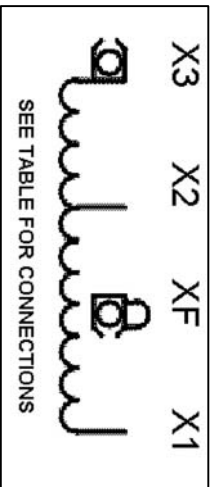

MICRON IMPERVITRAN
 CONTROL TRANSFORMERS
 800.664.4660
 www.microntransformers.com

200VA 50/60HZ
 TEMP CL. 130°C

CAT. NO. B200-2004-8F
 SERIES 2

15083

PACKAGED ACCESSORIES	
1	
-	
-	

MICRON TRANSFORMERS

MICRON INDUSTRIES CORPORATION
 141 GARDNER ROAD
 ELLENCASTLE, ALABAMA 36035
 TEL: 205.336.1100
 WWW.MICRONTRANSFORMERS.COM

DATE: 3/24/08 DRAWN: JGV CHECKED: APPROVED:

MICRON PART NO. B200-2004-8F