

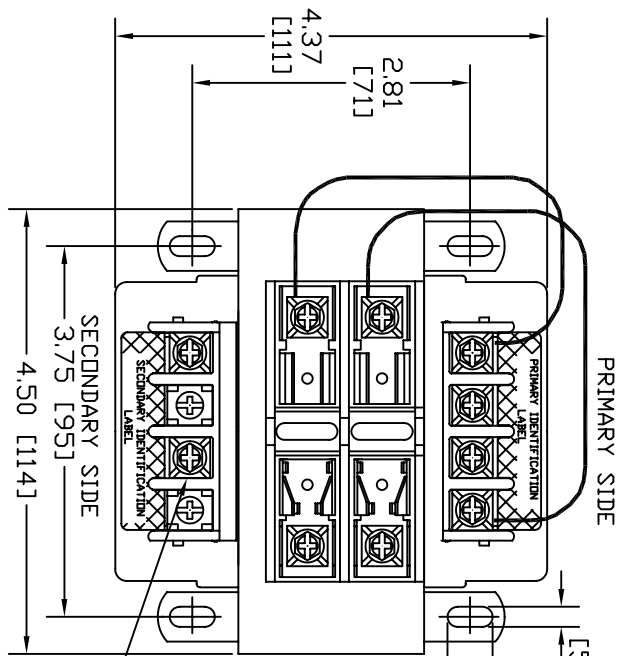


| Transformer Specifications | |
|----------------------------|---------|
| PRIMARY VOLTAGE(S) | 120x240 |
| SECONDARY VOLTAGE(S) | 24 |
| RATED V.A. | 250 |
| RATED FREQUENCY | 50/60 |
| INSULATION CLASS | 130 |
| AGENCY APPROVALS | UL, CUL |
| ESTIMATED WEIGHT | 9.2 LBS |

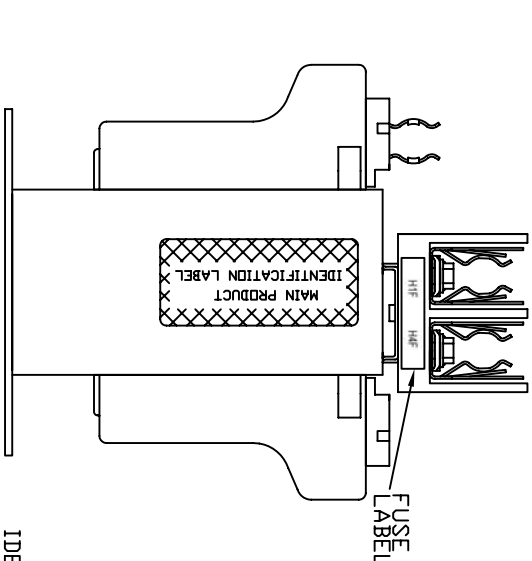


PRIMARY SIDE
0.20 [5] TYP. 4 PLACES
0.46 [12] TYP. 4 PLACES
SECONDARY SIDE
4.50 [114]
3.75 [95]
SECONDARY IDENTIFICATION LABEL

TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

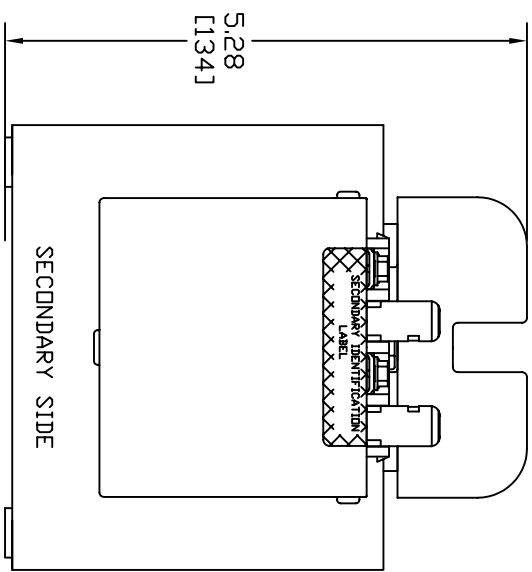


MAIN PRODUCT IDENTIFICATION LABEL
FUSE BLOCK MARKING

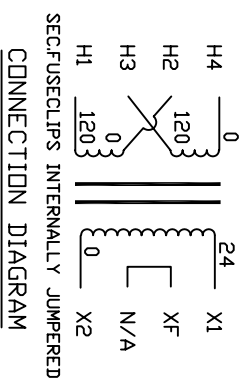


SECONDARY CONNECTIONS INTERNALLY JUMPED CONNECTION DIAGRAM

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

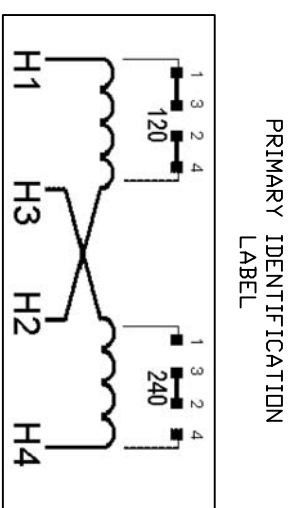

PRIMARY IDENTIFICATION LABEL

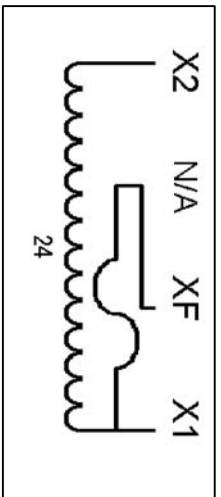

SECONDARY IDENTIFICATION LABEL

MICRON Impervitran
U.S. PAT. NO. 3,576,040
250VA 50/60HZ
TEMP CL. 130°C
CAT. NO. B250LP7RBF
SERIES 2
06083

| DATE | REV | BY | CHKD | APPV |
|--------------|-----|----|------|------|
| 2/13/08 | JGV | | | |
| RELEASE DATE | | | | |
| MATERIAL | | | | |
| MICRON | | | | |
| SCALE NONE | | | | |
| C NONE | | | | |
| B250LP7RBF | | | | |