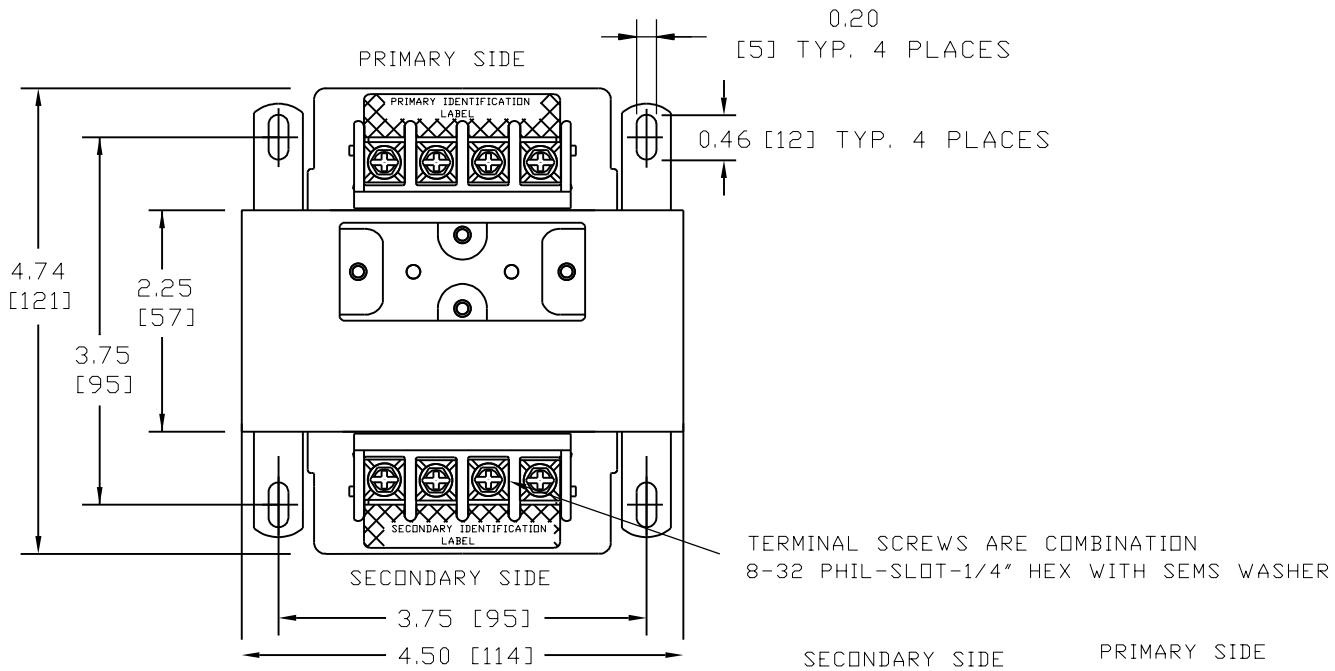

TERMINAL SCREWS ARE COMBINATION
8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

Transformer Specifications	
PRIMARY VOLTAGE(S)	120x240
SECONDARY VOLTAGE(S)	120x240
RATED V.A.	350
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	11.4 LBS

TEST REQUIREMENTS				
WINDING	H4-H3	H2-H1	X2-X1	X2-X1
D.C.VOLTS	120	120	128.2	128.2
LOAD VOLTS	120	120	120	120
F.L. AMPS	1.758	1.758	1.460	1.460
HI-POT	3000V			
EXCITING AMPS	1.80AMPS @ 120 VOLTS, 50HZ			
EXCITING WATTS	19.5 MAX			



CONNECTION DIAGRAM

NOTE:
1. ALL MEASURMENTS IN INCHES (MM)

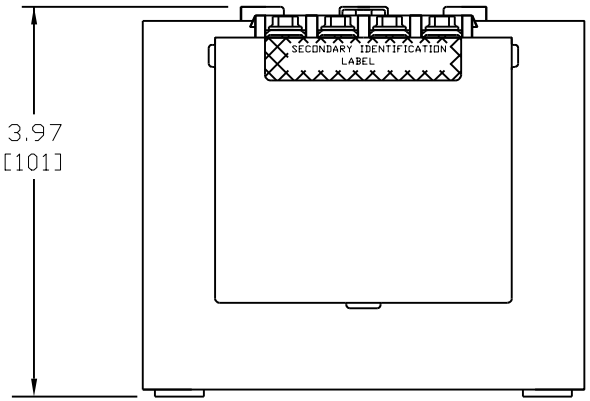

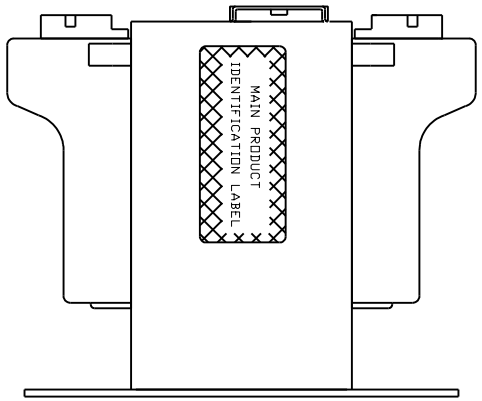

PRIMARY IDENTIFICATION LABEL

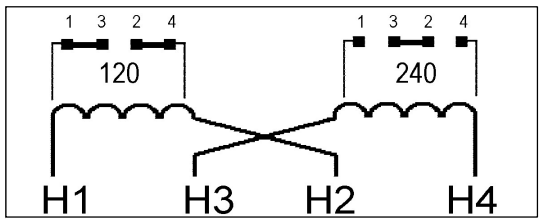

SECONDARY IDENTIFICATION LABEL

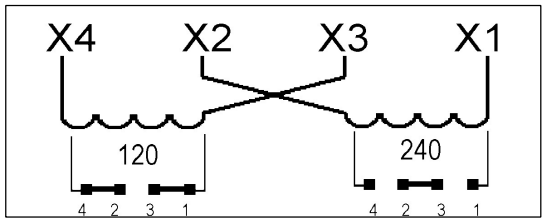

MAIN PRODUCT IDENTIFICATION LABEL

MICRON CONTROL TRANSFORMERS
800 664-4660
www.MicronTransformers.com
ImperviTRAN ®
U.S. PAT. NO.3516040
350VA 50/60Hz
TEMP CL. 130°C
CAT. NO. B350LP1519JJF
SERIES 2
12091
c UL us Listed 702X

PACKAGED ACCESSORIES	
1	2 PAIR OF JUMPERS
–	–
–	–

MICRON CONTROL TRANSFORMER
MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD – ELMHURST, IL 60126
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronTransformers.com

A	NEW		J.V	3/11/09	
ECL	REVISIONS		BY	DATE	

DATE 3/11/09	DRAWN J.G.V	CHECKED	APPROVED
RELEASE DATE	CUSTOMER PART NO.		
MICRON PART NO.	B350LP1519JJFA7777A2 B350LP1519JJFA7777B2		
SIZE C	SCALE NONE	B350LP1519JJF	