


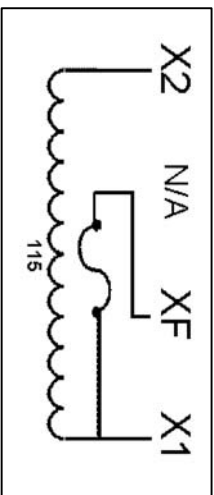
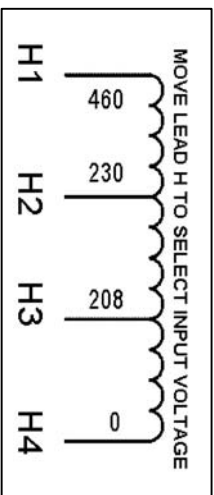
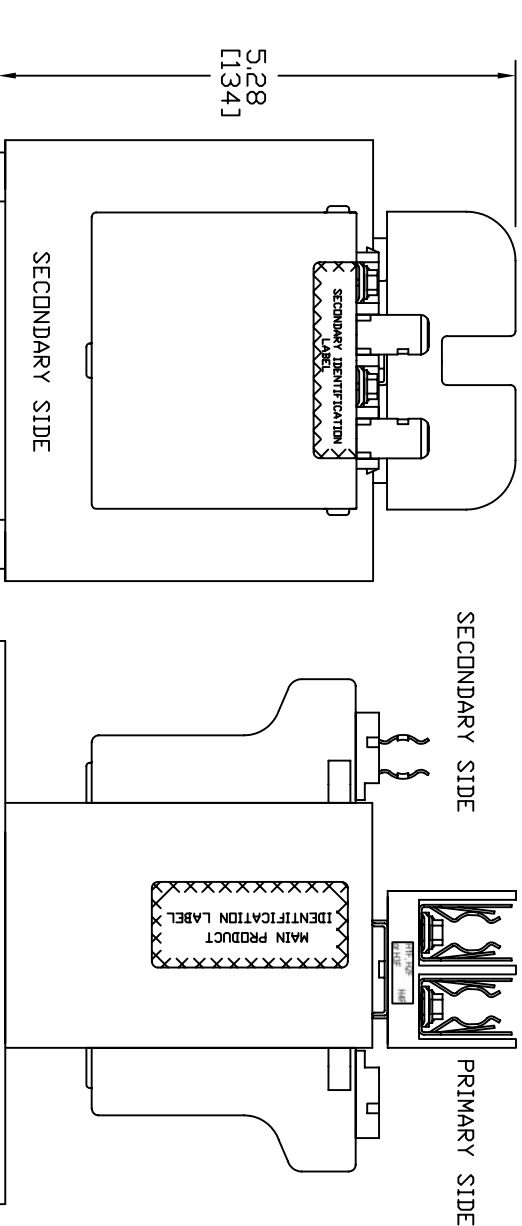
0.84 TYP. 4 PLACES

0.20 TYP. 4 PLACES


MAIN PRODUCT IDENTIFICATION LABEL


ImpervITRAN
 U.S. PAT. NO. 3,516,040
 350VVA 50/60HZ
 TEMP CL. 130°C
 www.MicronTransformers.com
 CAT. NO. B350MBT13RKF
 SERIES 2
 04084
 cUL US LISTED 7022x

TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER



Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	350
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	12.4 LBS

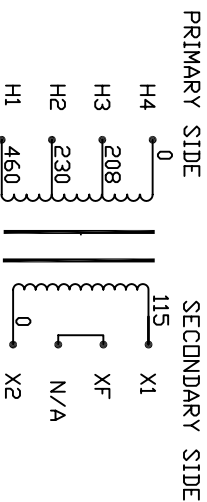

INTERNALLY JUMPERED TO FUSE TERMINAL CONNECTION DIAGRAM

NOTE:

1. TORQUE CONNECTIONS TO 16 LB-IN
2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
3. ALL MEASUREMENTS IN INCHES (MM)

PACKAGED ACCESSORIES

MICRON PART NO.	SCALE	B350MBT13RKF
DATE	9-27/07	
REVISION	J.G.V.	
DESIGNED BY	J.G.V.	
APPROVED BY		
MICRON INDUSTRIES CORPORATION 17700 ELK HOLLOW DRIVE, SUITE 1000 ELK HOLLOW, CALIFORNIA 94502-3850 TEL: (925) 436-1000 FAX: (925) 436-1001 WWW.MICRONTRANSFORMERS.COM		