

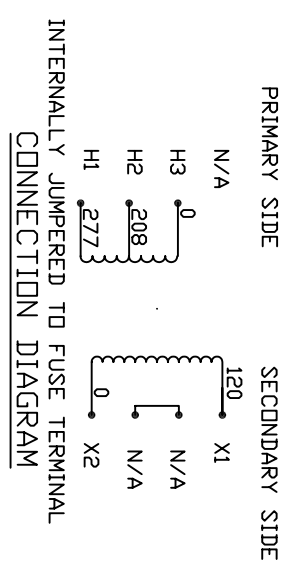


Transformer Specifications	
PRIMARY VOL TAGE(S)	208 /277
SECONDARY VOL TAGE(S)	120
RATED V.A.	350
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	110 LBS

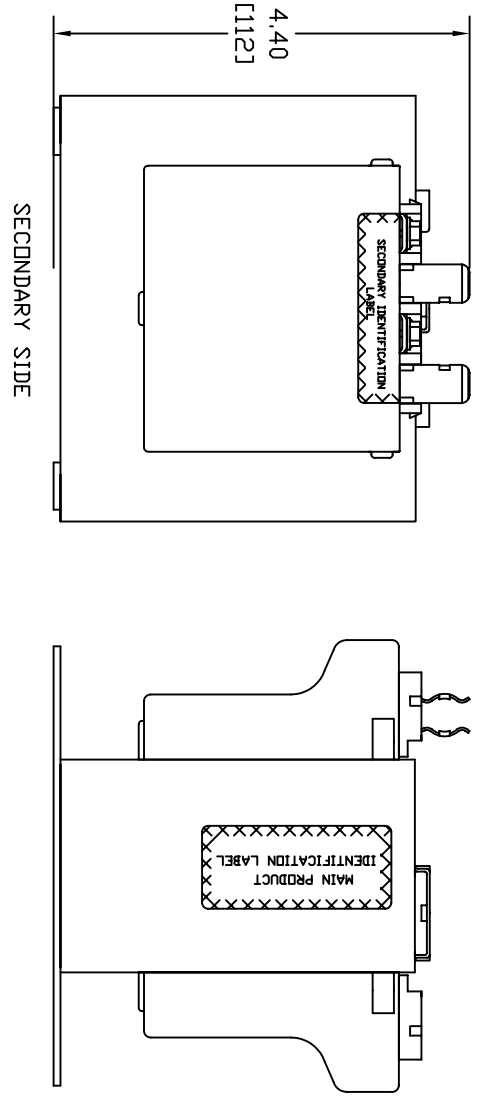

1. TORQUE CONNECTIONS TO 16 LB-IN
2. FUSE CLIPS TO ACCOMADATE 13/32-1 1/2"
3. ALL MEASUREMENTS IN INCHES (MM)

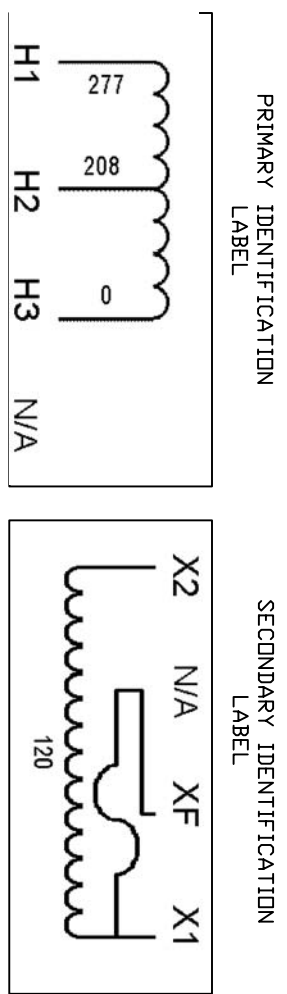

IDENTIFICATION LABEL

**MICRON** **ImpervITRAN**  
 U.S. PAT. NO. 3,516,040  
 350VA 50/60Hz  
 TEMP CL. 130°C  
 CAT. NO. B350MQ15XKF  
 SERIES 2  
 16085

UL US LISTED 702X

TECHNICAL SUPPORT  
 800 664-4660  
 www.microntransformers.com

PACKAGED ACCESSORIES	
DATE	01/31/07
REVISED	
DESIGNED BY	
CHECKED BY	
APPROVED BY	
MICRON PART NO.	B350MQ15XKF
SCALE	