

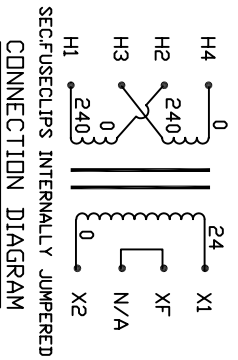


Transformer Specifications	
PRIMARY VOLTAGE(S)	240X480
SECONDARY VOLTAGE(S)	24
RATED VA.	350
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	11.6 LBS

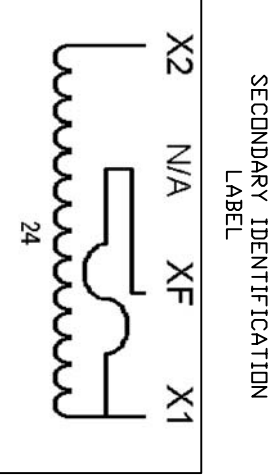

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

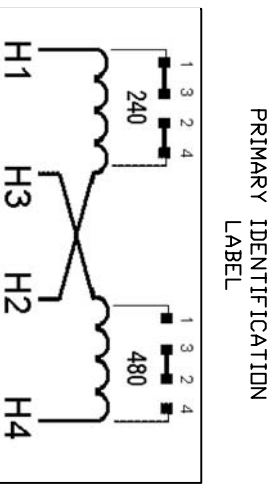

MICRON
TRANSFORMER DIVISION
800 664-4000
www.MicronTransformers.com

Impervitran
U.S. PAT. NO. 3,516,040

350VA 50/60-Hz
TEMP CL. 130°C

CAT. NO. B350PU7JKF
SERIES 2

160833

UL Listed 702X

MAIN PRODUCT IDENTIFICATION LABEL

PACKAGED ACCESSORIES

QTY	DESCRIPTION	REV	DATE	BY	CHKD	APP'D
1	1 PAIR OF JUMPERS					
-						
-						

MICRON SCALE NONE B350PU7JKF

MICRON INDUSTRIES CORPORATION
14, GARDNER
www.MicronTransformer.com

DATE: 04/23/08 DRAWN: RN CHECKED: APPROVED: