


Transformer Specifications	
PRIMARY VOLTAGE(S)	208//600 (UNIVERSAL)
SECONDARY VOLTAGE(S)	85//130
RATED V.A.	500
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	22.9 LBS


FOR TEST REQUIREMENTS SEE 412-0371F  
COIL TEST PAGE

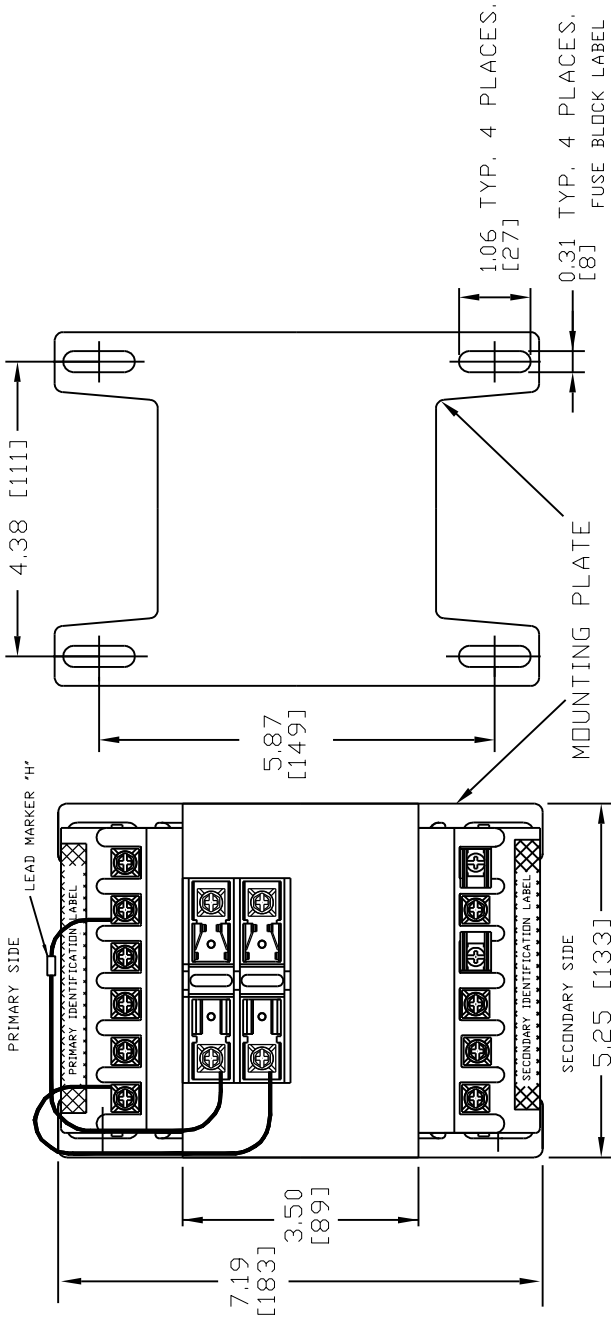

H1F  
H2F, H3F  
H4F or H5F

PRIMARY SIDE

SECONDARY SIDE



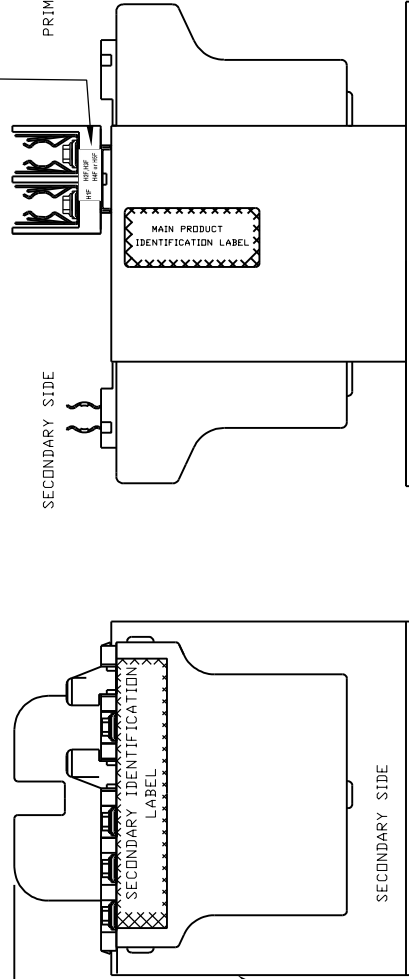


CONNECTION TABLE LABEL

INPUT VOLTAGE	H1-H2	H1-H3	H1-H4	H1-H5	OUTPUT VOLTAGE	XF-X2	XF-X3	XF-X4
240	416	480	800	99	120	130		
230	400	460	575	85	115	125		
220	380	440	550	91	110	120		
208			500	85	100	110		

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

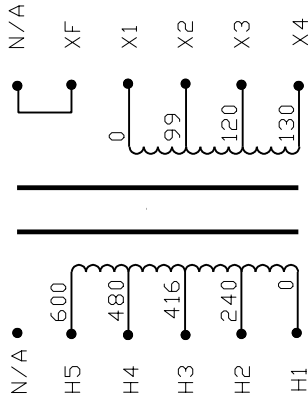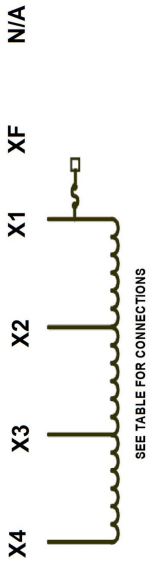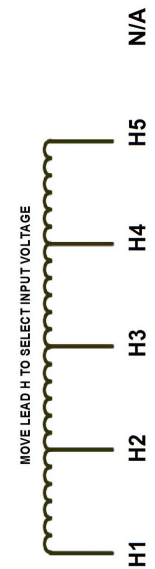

CONNECTION DIAGRAM

NOTE:

1. ALL MEASUREMENTS IN INCHES (MM)

IND. BOX LABEL

**MICRON**  
TRANSFORMERS  
800 664-4660  
www.microntransformers.com

QTY. 1

MADE IN USA

500VA  
PRIMARY:  
208//600

SECONDARY:  
85//130

FREQUENCY:  
50/60Hz

CAT.  
**B500-0487-8F**  
**SERIES 2**

33115

MAIN PRODUCT IDENTIFICATION LABEL

**MICRON**  
TRANSFORMERS  
800 664-4660  
www.microntransformers.com

**Imperial**  
U.S. PAT. NO. 5,160,418

500VA 50/60HZ  
TEMP CL. 130°C

CAT. **B500-0487-8F**  
NO. **SERIES 2**

Listed 702X

33115

PACKAGED ACCESSORIES

1	DATE	3/21/08	BY	J.G.V	CHECKED	APPROVED
-						
-						
-						

DATE	3/21/08	BY	J.G.V	CHECKED	APPROVED
RELEASE DATE					
DRAWING UPDATED	J.V	8/19/13			
CORRECT FUSE BLOCK MARKING LABEL	J.V	9/7/12			
A NEW	J.V	3/21/08			
REVISIONS					
BY					
DATE					
MICRON					
PART NO.					
B500-0487-8FA777A2					
B500-0487-8FA777B2					
FILE					
C					
NAME					
B500-0487-8F					

**MICRON**  
INDUSTRIES CORPORATION  
11111 W. 10TH AVE., SUITE 100  
DENVER, CO 80231-1000  
TEL: (800)664-4660, (303)561-1000  
FAX: (303)561-1880  
www.microntransformers.com