

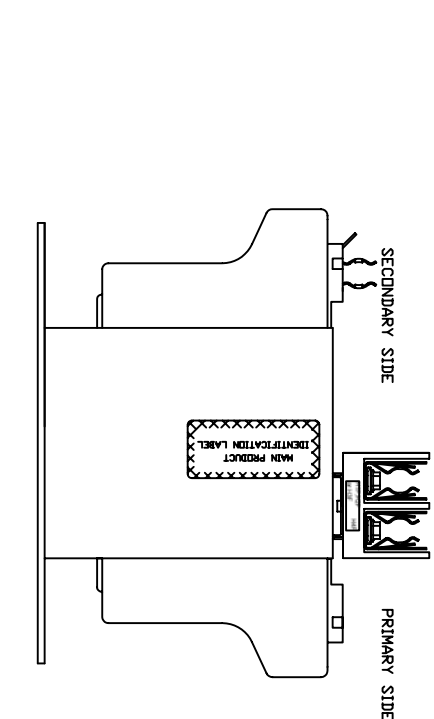
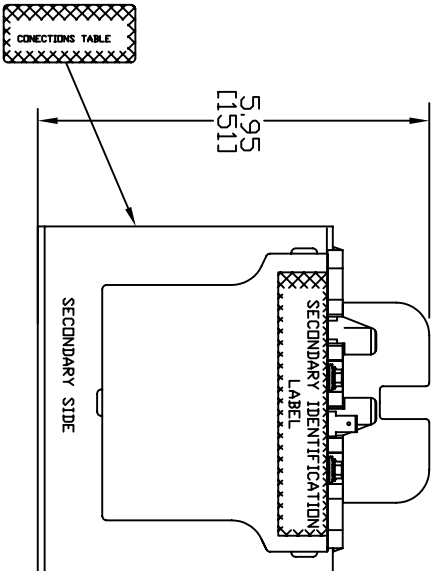
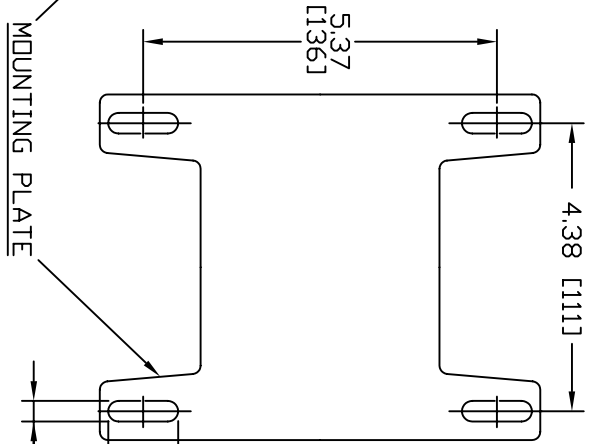


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED VA	500
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL/CUL
ESTIMATED WEIGHT	231 LBS

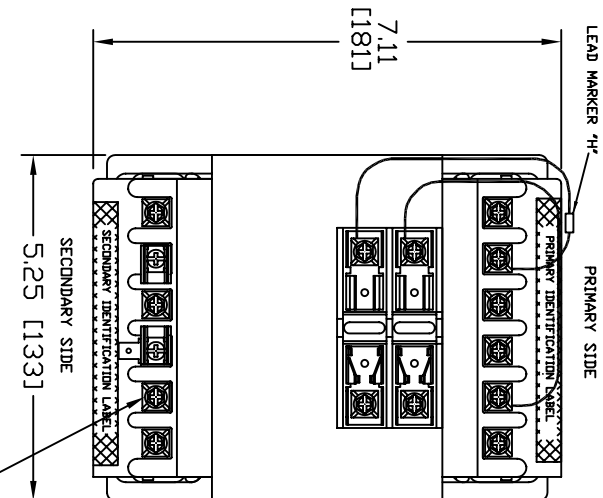

NOTE:
 1. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 2. ALL MEASUREMENTS IN INCHES (MM)

CONNECTION TABLE LABEL

WINDING	VOLTS	AMPS	VA	WATTAGE
PRIMARY	240	2.1	504	500
SECONDARY	115	4.3	494	500
SECONDARY	24	21	504	500
SECONDARY	230	2.2	506	500
SECONDARY	460	1.1	506	500

NOTE: FUSE CLIPS ARE NOT SHOWN FOR CLIPPING PURPOSES. FUSE CLIPPING SHOULD BE DONE OFF OF THE TRANSFORMER, WHEN SO BRANCHING IN.


MAIN PRODUCT IDENTIFICATION LABEL

MICRON IMPERVITRAN
 U.S. PAT. NO. 3,571,604
 500VA 50/60Hz
 TEMP. CL. 130°C
 CAT. NO. B500-2008-8F
 SERIES 2
 070985


UL US LISTED TOXZ

WWW.MICRONTRANSFORMERS.COM

PRIMARY IDENTIFICATION LABEL

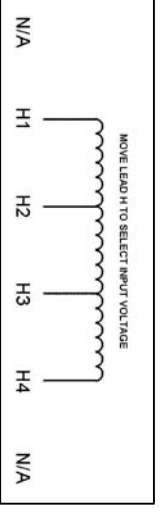

SECONDARY IDENTIFICATION LABEL

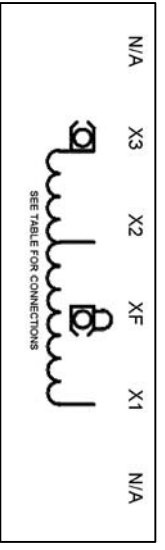

PACKAGED ACCESSORIES

QTY	DESCRIPTION	REVISION	DATE
1			

MICRON TRANSFORMERS CORPORATION
 14 GARDNER DRIVE, WESTFIELD, MA 01096
 TEL: 413/253-1111 FAX: 413/253-1112

DATE: 10/31/07 DRAWN: JGV CHECKED: [Signature]

MICRON PART NO. B500-2008-8F