




PRIMARY SIDE

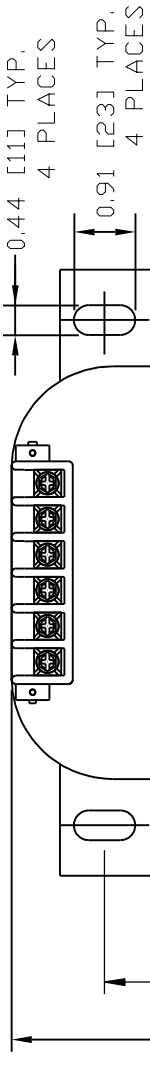

SECONDARY SIDE

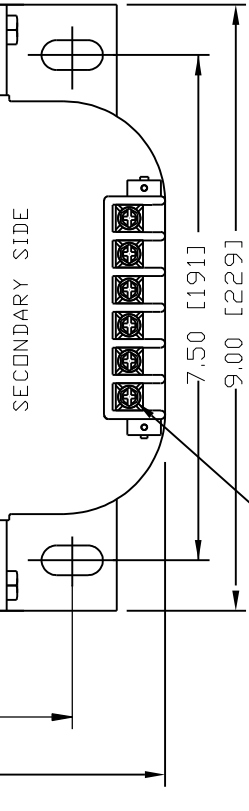

10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

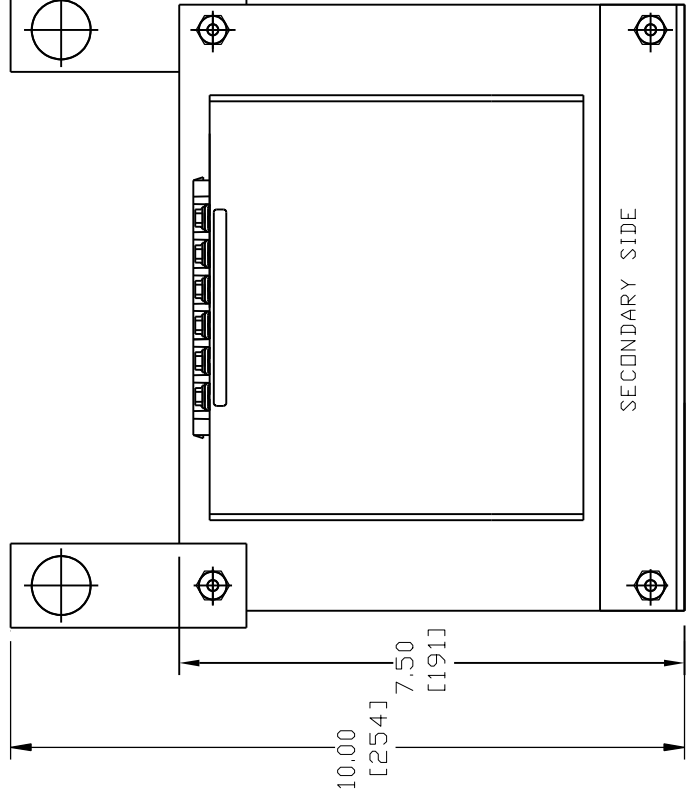



Transformer Specifications

PRIMARY VOLTAGE(S)	230x460 TRIPLE RATED
SECONDARY VOLTAGE(S)	115X230
RATED V.A.	5000
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	114.6 LBS

FOR TEST REQUIREMENTS SEE 719-0016
COIL TEST PAGE

PRIMARY SIDE

SECONDARY SIDE

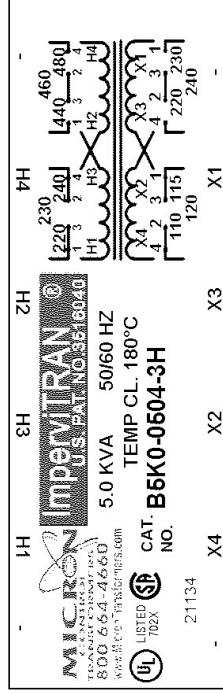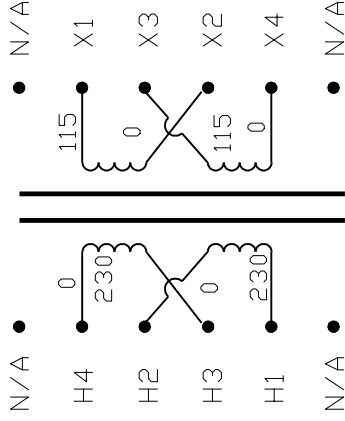

CONNECTION DIAGRAM

NOTE:

1. ALL MEASUREMENTS IN INCHES (MM)
2. INTERLEAVE LAMINATIONS 3X3

SECONDARY SIDE

PRIMARY SIDE

ADD NOTE 2 INTERLEAVE LAMINATIONS	PJA	10/16/15
DRAWING UPDATED	JV	3/12/12
A FORMAT REVISED	RN	09/22/08
ECL	REVISIONS	BY DATE

PACKAGED ACCESSORIES

1 2 PAIR OF JUMPERS

DATE	09/22/08	DRAWN	RN	CHECKED	APPROVED
RELEASE DATE		CUSTOMER	PART NO.		

MICRON INDUSTRIES CORPORATION
1211 W. 22nd STREET, SUITE 200, DAK BROOK, ILL.
CONTACT CENTER TEL: (800)864-4660 FAX: (630)516-1850
WWW.MICRONTRANSFORMERS.COM

MICRON PART NO.	B5K0-0504-3HA9999A0
SCALE	NONE
SIZE	C
	B5K0-0504-3HA777B0
	B5K0-0504-3H