


LABEL 1

INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3	X3-X1
H4-H2	X3-X2
440	110
220	115
460	90
230	95
480	120
240	100

LABEL 2

Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460/575 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	95/115
RATED V.A.	5000
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	129.4 LBS

0.44
[11] TYP. 4 PLACES
0.91
[23] TYP. 4 PLACES


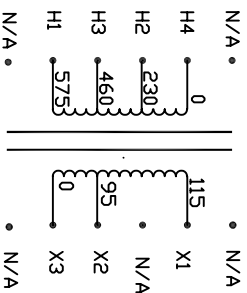


CONNECTION DIAGRAM

PRIMARY SIDE SECONDARY SIDE

SECONDARY SIDE
PRIMARY SIDE

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

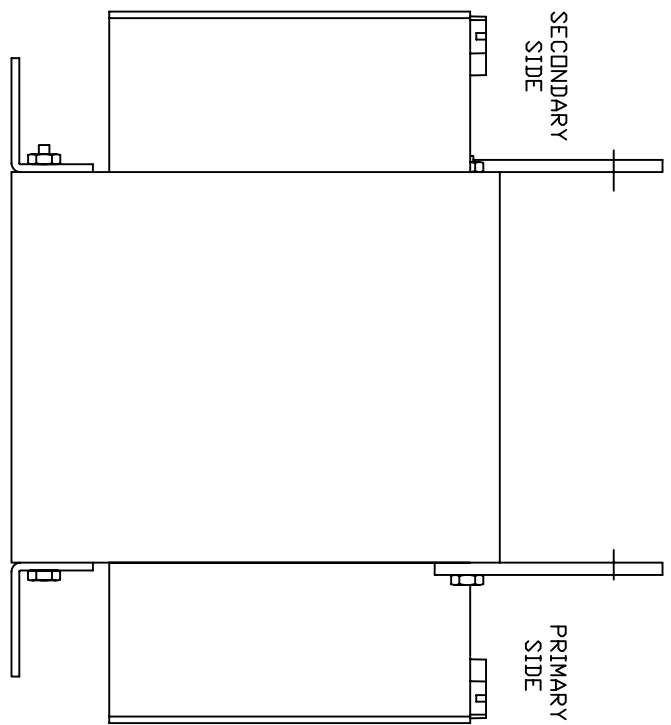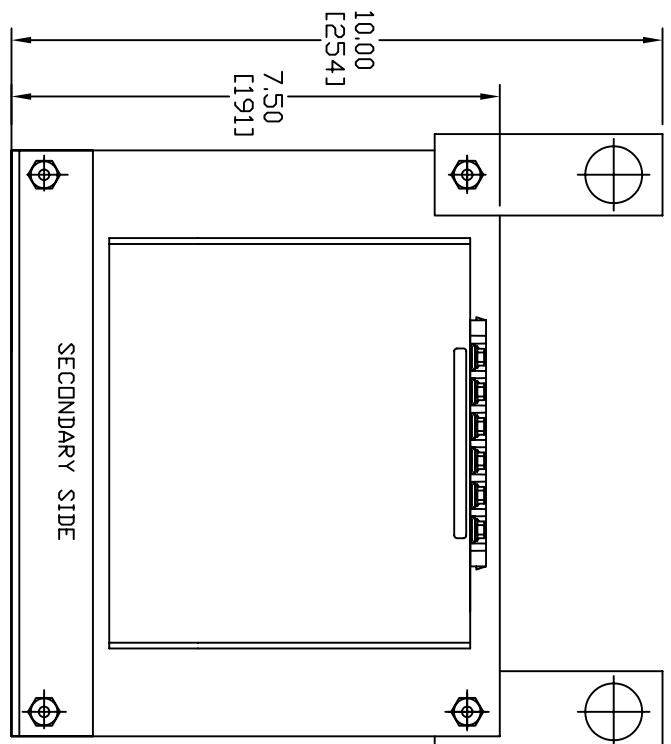

PACKAGED ACCESSORIES

1	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

MICROKON
TRANSFORMERS

MICRON INDUSTRIES CORPORATION
CHURCH ROAD - ELLENCASTLE
14, 180044 - www.micron.com

DATE: 11/7/07
DRAWN: JGV.
CHECKED: JGV.
DESIGNED: JGV.
APPROVED: JGV.

SIZE: C
SCALE: 1/8"=1"

PART NO: BSK0BTWZ37XXH