
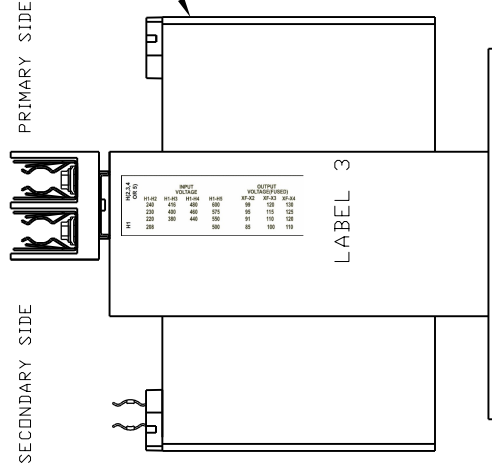


TERMINAL SCREWS ARE COMBINATION 10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

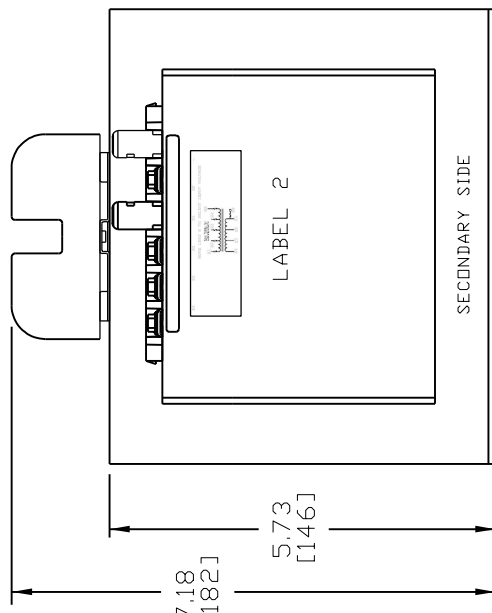

IND. BOX LABEL

**MICRON**  
TRANSFORMERS  
800.664.7660  
www.MicronTransformers.com

750 VA  
PRIMARY:  
230/400/460/575  
SECONDARY:  
95/115/125  
FREQUENCY:  
50/60 HZ

QTY. 1

UL US

MADE IN USA


Cat. **B750-0488-8F**

39144

Transformer Specifications

PRIMARY VOLTAGE(S)	230/400/460/575 (UNIVERSAL)
SECONDARY VOLTAGE(S)	95/115/125
RATED V.A.	750
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	30.7 LBS

FOR TEST REQUIREMENTS SEE 415-0148  
COIL TEST PAGE

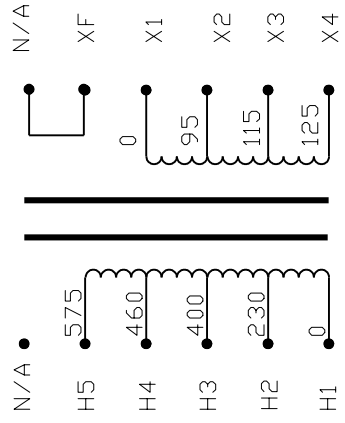


INTERNALLY JUMPED TO FUSE TERMINAL

CONNECTION DIAGRAM

NOTES:  
1. ALL MEASUREMENTS IN INCHES (MM)

LABEL 3

INPUT VOLTAGE	H1-H5	OUTPUT VOLTAGE(FUSED)	XF-X4
H1-H2 240	416	89	120
H1-H3 416	460	95	115
H1-H4 460	575	91	120
H1-H5 575	440	85	100
H2 230	380	91	110
H2 208	440	85	100

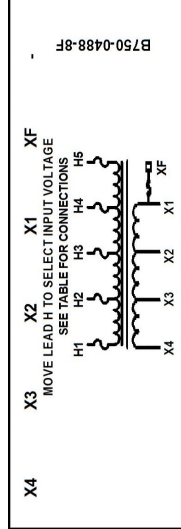

LABEL 1

**MICRON**  
TRANSFORMERS  
800.664.7660  
www.MicronTransformers.com

LISTED U.S. PAT. NO. 3516040

CAT. **B750-0488-8F**

750 VA 50/60 HZ  
TEMP CL 130 °C

SEE DIAGRAM FOR CONNECTIONS

39144

PACKAGED ACCESSORIES

1	-	-	-
---	---	---	---

MICRON INDUSTRIES CORPORATION  
1211 W 22nd STREET, SUITE 200, DAK BROOK, ILL.  
Tel: 630.664.7660 Fax: 630.236.1860

DATE: 1/21/08 DRAWN: J.G.V. CHECKED: APPROVED: [Signature]

RELEASE DATE: [Blank]

MICRON PART NO. B750-0488-8FA7777A0

SCALE C NODE B750-0488-8FA7777B0

SIZE C NODE B750-0488-8F

J.V.	8/21/13	BY	DATE
J.V.	1/21/08	BY	DATE

DRAWING UPDATED

A REDRAWN REVISIONS

ECL