

CONNECTED TABLE LABEL




INPUT VOLTAGE	OUTPUT VOLTAGE
H-H3	XF-X2
H-H2	XF-X1
..	..
208	240
200	230
220	240
480	460
440	440
	24
	23
	110

NOTE: IF NON-QUIPUS ARE USED, STATIONARY OR FISING SHOULD BE DONE OFF OF THE TRANSFORMER. WITH 1X BRACING, XF

Transformer Specifications

PRIMARY VOL TAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOL TAGE(S)	24/115
RATED V.A.	750
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	38.6 LBS

0.31 TYP. [8] 4 PLACES
0.91 TYP. [23] 4 PLACES
10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

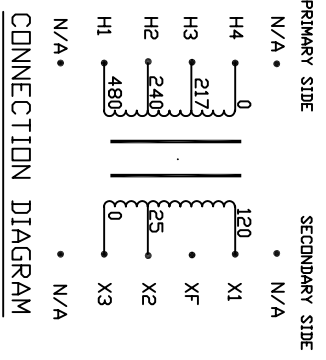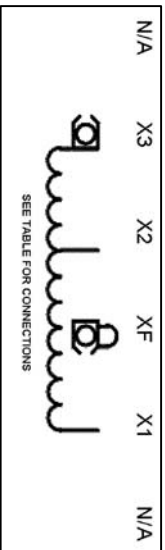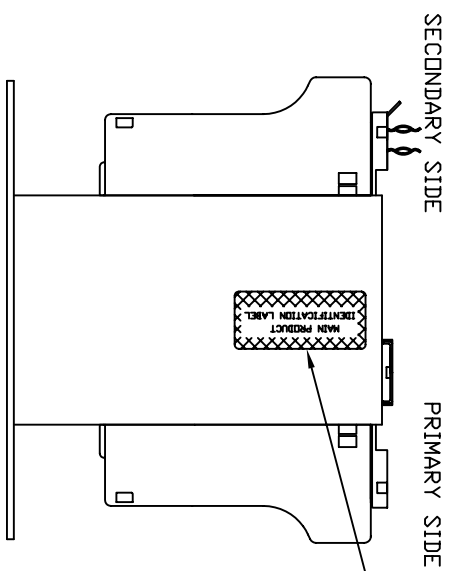

NOTE:
1. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
2. ALL MEASUREMENTS IN INCHES (MM)



PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

MAIN PRODUCT IDENTIFICATION LABEL

TOP OF LABEL TOWARD PRIMARY SIDE

Impervitran
U.S. PAT. NO. 3,576,040

750VA
TEMP CL. 130°C

50/60Hz

UL LISTED 702X

CAT. NO. B750-2009-1F
SERIES 2

50073

PACKAGED ACCESSORIES

MICRON INDUSTRIES CORPORATION
14000 W. 10th Street, Suite 1000
Tomball, TX 77375
www.microntransformers.com

DATE: 12/18/07
SCALE: 1:1
REV: 000000

SIZE: 1/2" x 1/2" x 1/2"
C: NONE
NAME: B750-2009-1F