



Transformer Specifications	
PRIMARY VOLTAGE(S)	120x240
SECONDARY VOLTAGE(S)	120x240
RATED V.A.	750
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	26.5 LBS

TEST REQUIREMENTS			
WINDING	H4-H3	H2-H1	X4-X3 X2-X1
D.C. VOLTS	120	120	125/6 125/6
LOAD VOLTS	120	120	120 120
F.L. AMPS	3.555	3.555	3.125 3.125
HI-POT	3000V		
EXCITING AMPS	1.65AMPS @ 120 VOLTS, 50HZ		
EXCITING WATTS	34.5 MAX		

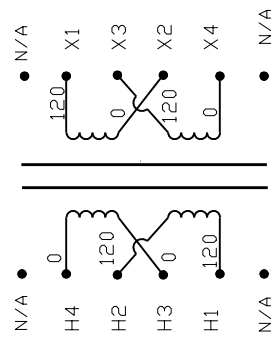


CONNECTION DIAGRAM

NOTE:  
1. ALL MEASUREMENTS IN INCHES (MM)

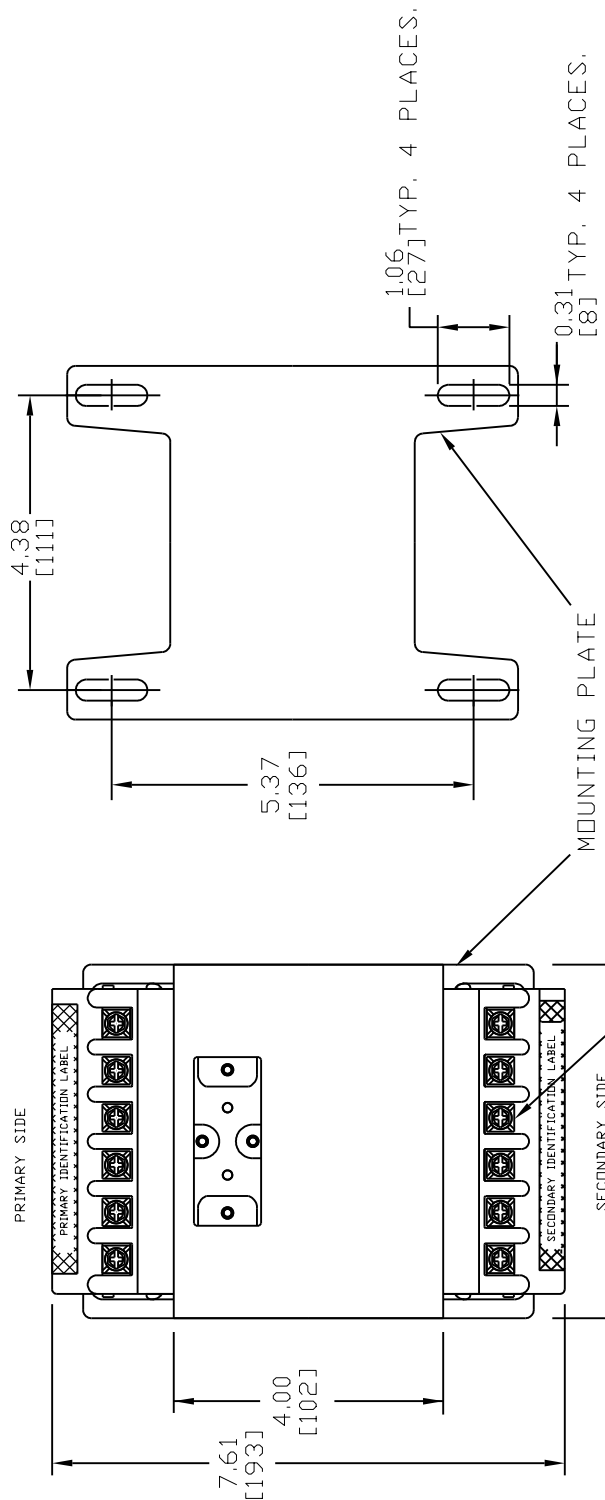

10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

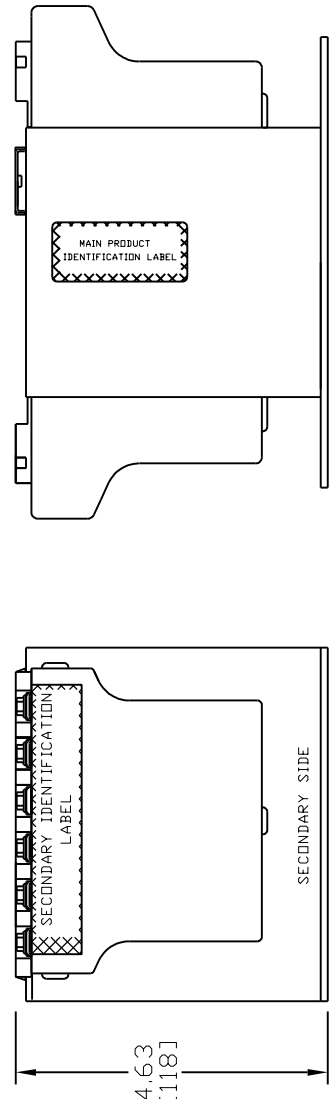

MAIN PRODUCT IDENTIFICATION LABEL


**MICRON**  
TRANSFORMERS  
80 U.S. PAT. NO. 3,516,040  
WWW.MICRONTRANSFORMERS.COM

**Impervitran**  
U.S. PAT. NO. 3,516,040


750VA 50/60Hz  
TEMP CL. 130°C

CAT. NO. B750LP1519JJF  
S. NO. 12091  
Series 2

SECONDARY IDENTIFICATION LABEL

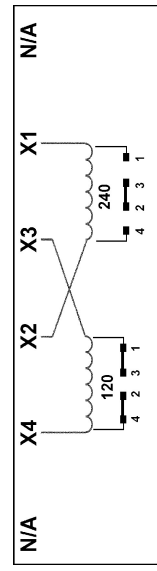

PRIMARY IDENTIFICATION LABEL

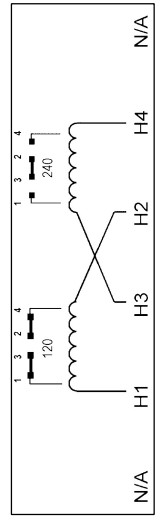

PACKAGED ACCESSORIES	
1	2 PAIR OF JUMPERS
-	-
-	-

DATE	RELEASED	CHECKED	APPROVED
3/11/09	J.G.V.		

MICRON PART NO.	SCALE	SIZE	INDIC
B750LP1519JJFA7777A2		C	
B750LP1519JJFA7777B2			

ECL	REV	DATE	BY	REVISIONS
	A	3/11/09	JLV	NEW

**MICRON**  
INDUSTRIES CORPORATION  
777 CHURCH ROAD  
ELMHURST, ILL. 60126  
Tel: (800)664-4660, (630)951-1822, Fax: (630)951-1820  
www.micron-transformers.com