Transformer Specifications	
PRIMARY VOLTAGE(S)	575 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	750
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	26.2 LBS

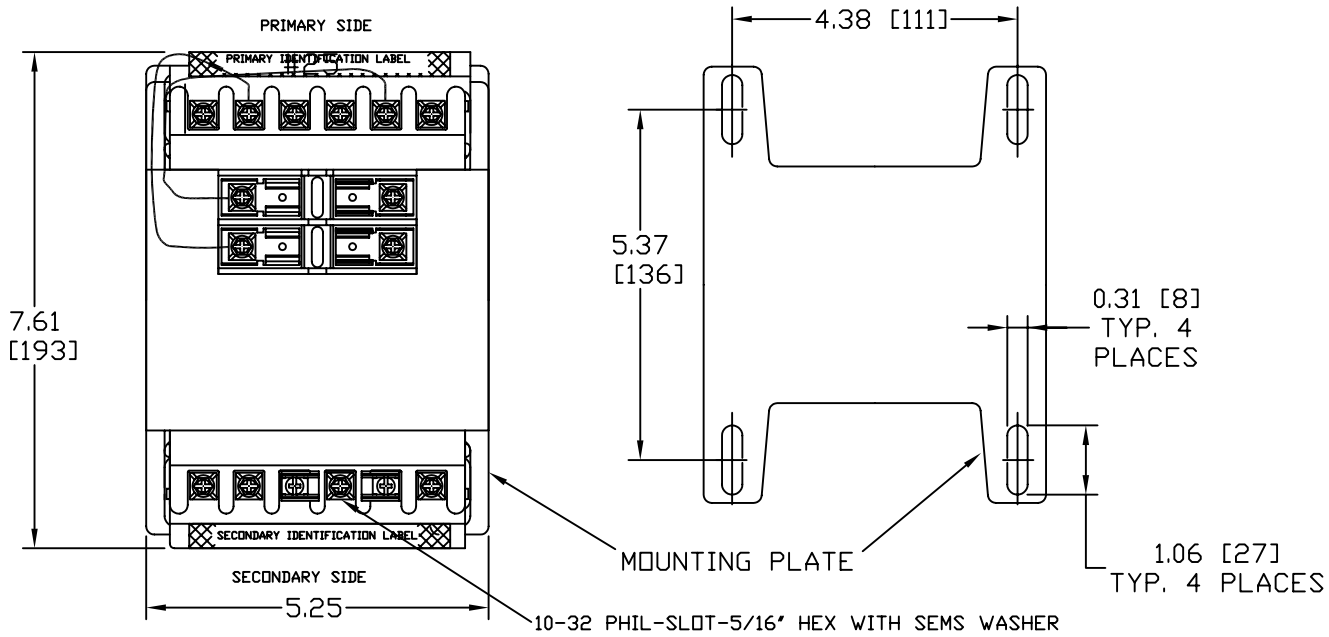



INTERNAL JUMPER
CONNECTION DIAGRAM

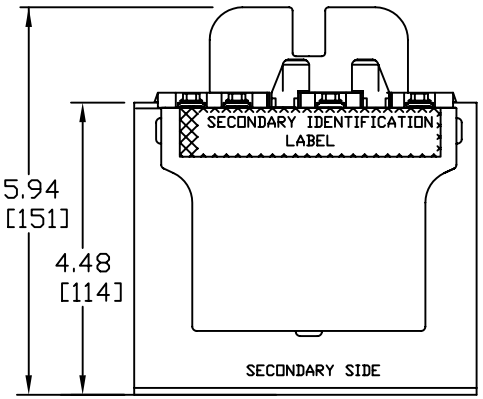

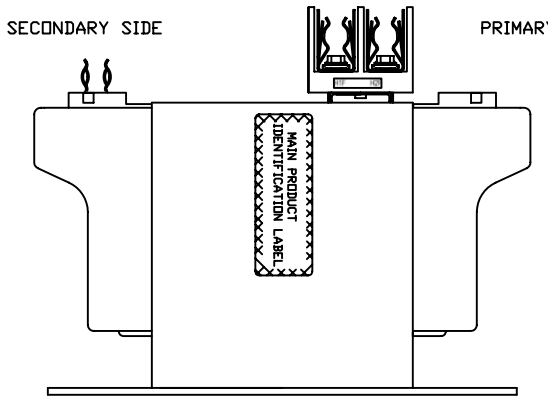

NOTE:
1. FUSE CLIPS TO ACCOMADATE 13/32-1 1/2"
2. ALL MEASURMENTS IN INCHES (MM)

PRIMARY IDENTIFICATION LABEL

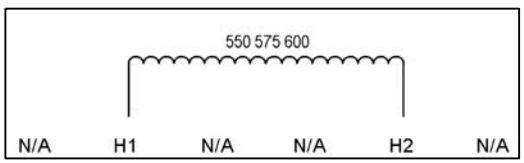

SECONDARY IDENTIFICATION LABEL

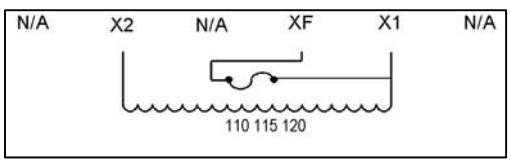

MAIN PRODUCT IDENTIFICATION LABEL

MICRON CONTROL TRANSFORMERS
800 664-4660
www.MicronTransformers.com
ImperviTRAN ®
U.S. PAT. NO.3516040
750VA 50/60Hz
TEMP CL. 130°C
c UL us Listed 702X
CAT. NO. B750WZ13RKF
SERIES 2
02085

PACKAGED ACCESSORIES	
–	–
–	–

MICRON CONTROL TRANSFORMER
MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD — ELMHURST, IL 60126
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronTransformers.com

DATE	DRAWN	CHECKED	APPROVED
1/17/08	J.G.V		
RELEASE DATE	CUSTOMER PART NO.		

MICRON PART NO.

SIZE	SCALE	
C	NONE	B750WZ13RKF