

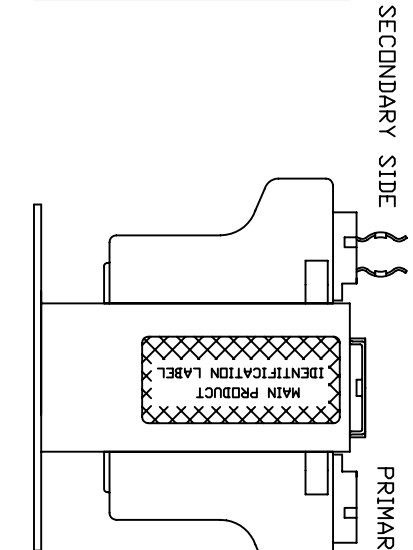


TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

Transformer Specifications	
PRIMARY VOLTAGE(S)	208/277
SECONDARY VOLTAGE(S)	120
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	5.5 LBS

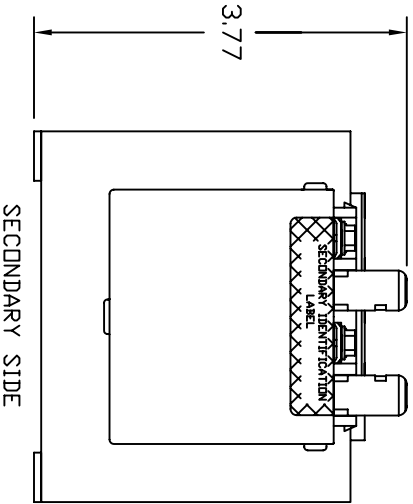


MAIN PRODUCT IDENTIFICATION LABEL

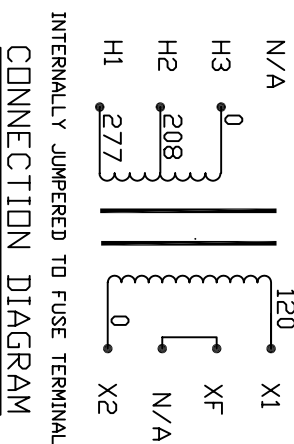


INTERNALLY JUMPERED TO FUSE TERMINAL CONNECTION DIAGRAM

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
  2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
  3. ALL MEASUREMENTS IN INCHES (MM)

PRIMARY IDENTIFICATION LABEL

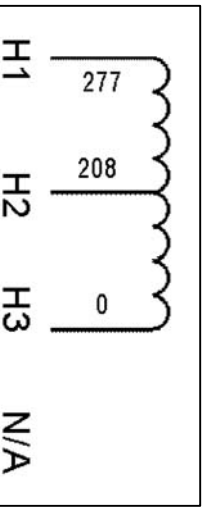

SECONDARY IDENTIFICATION LABEL

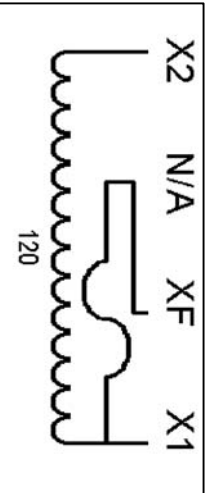

**MICRON**  
TRANSFORMER CONTROL  
800 664-4660  
www.microntransformers.com

**Impervitran**  
U.S. PAT. NO. 3516040

150VA 50/60HZ  
TEMP CL. 130°C

CAT. NO. B150MQ15XKF  
SERIES 2

04084

UL US LISTED 702X

DATE	BY	REVISION	DESCRIPTION
11/25/07	JGV	1	PACKAGED ACCESSORIES

MICRON PART NO.	B150MQ15XKF
DATE	11/25/07
BY	JGV
REVISION	1
DESCRIPTION	PACKAGED ACCESSORIES