

## 22.5 mm Pushbutton Enclosures

### Application -

Designed to offer protection for oil-tight pushbuttons, switches, and pilot lights from dust, water, dirt and oil. For installation information, consult our Installation Manual at [www.saginawcontrol.com](http://www.saginawcontrol.com).

### Construction -


- 0.063" carbon steel.
- Continuously welded seams.
- Captivated cover screws thread into sealed wells.
- 4-way pushbutton holes accept all brands of oil-tight push-buttons, switches and pilot lights. Hole diameter is 0.87" (22.5 mm).
- Immediate removal of cover is permitted.
- Oil-resistant gasket.

### Finish -

ANSI-61 gray powder coated inside and out.


### IS2 - Industry Standards -

NEMA Type 4, 12 & Type 13  
 UL Listed Type 4 & 12  
 CSA Type 4 & 12  
 IEC 60529 IP66

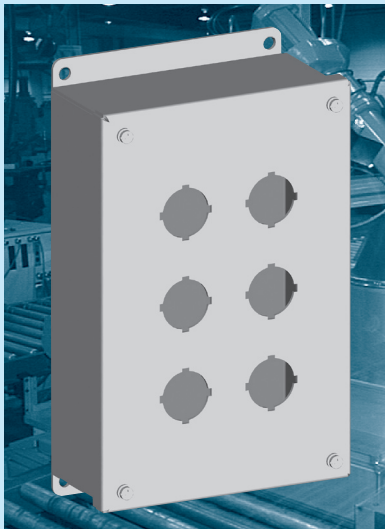

## 22.5 mm PUSHBUTTON ENCLOSURES

ENCLOSURE PRODUCT CODE A1					
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price
SCE-1PBI	3.50	3.25	2.75	IS2	43.90
SCE-2PBI	5.75	3.25	2.75	IS2	50.17
SCE-3PBI	8.00	3.25	2.75	IS2	56.43
SCE-4PBI	10.25	3.25	2.75	IS2	62.70
SCE-4SPBI	7.25	6.25	3.00	IS2	70.23
SCE-5PBI	12.50	3.25	2.75	IS2	68.98
SCE-6PBI	9.50	6.25	3.00	IS2	80.26
SCE-6PBVLI	14.75	3.25	2.75	IS2	75.24
SCE-8PBI	20.25	3.25	2.75	IS2	90.29
SCE-9PBI	9.50	8.50	3.00	IS2	92.80
SCE-12PBI	11.75	8.50	3.00	IS2	104.08
SCE-16PBI	11.75	10.75	3.00	IS2	120.40


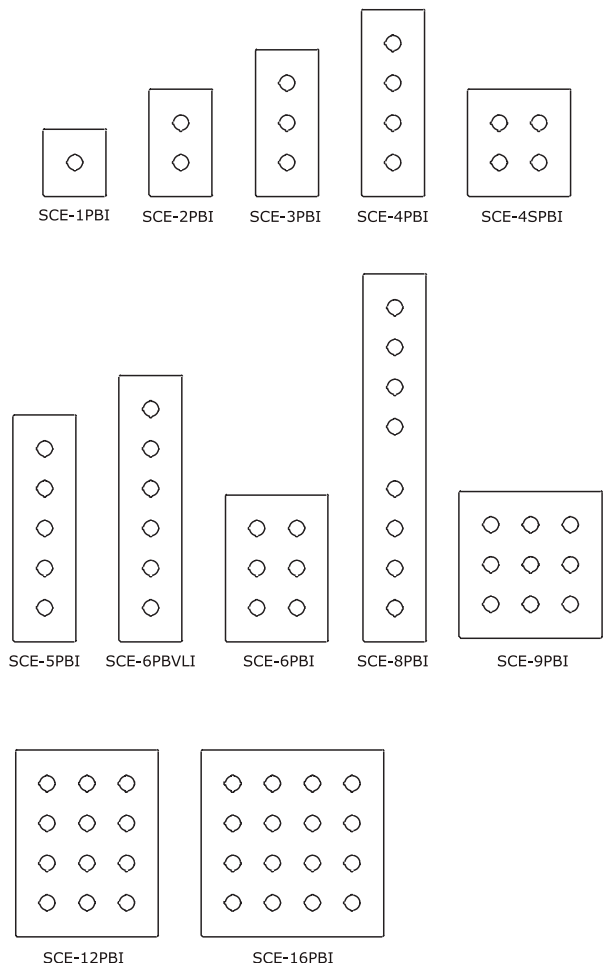


Phone (989) 799-6871  
 Fax (989) 799-4524




# 22.5 mm PUSHBUTTON ENCLOSURES


## TECHNICAL DATA

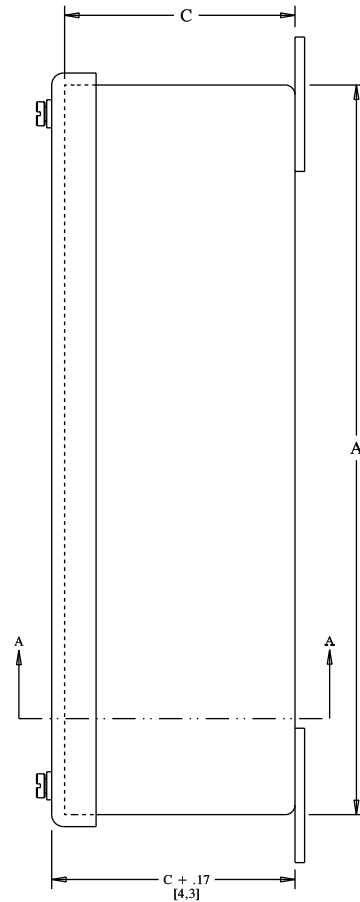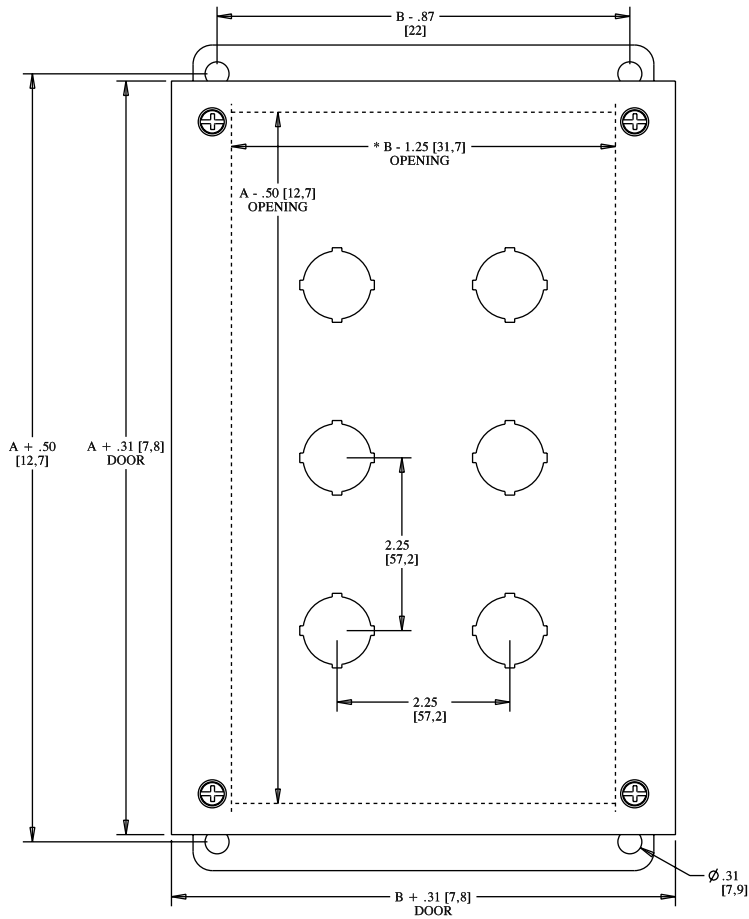

NOTE:  
\*  $B - .50$  [12.7] ONE COLUMN OF PUSHBUTTONS

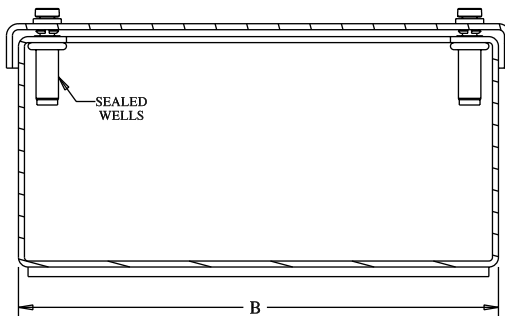

SECTION A-A



STANDARD 4-WAY