


Position and limit switches

T. 064

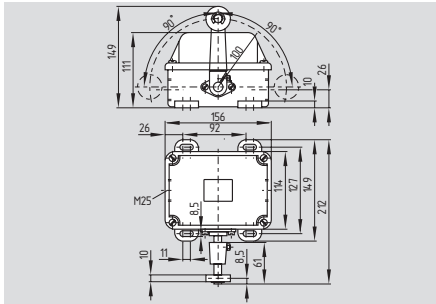


- Metal enclosure
- 3 contact, slow action \ominus
- Actuating direction, each time 90° right-hand side and left-hand side rotation
- 2 cable entries M25 x 1.5
- Protection class IP 65
- Splined shaft and lever available with 10° toothing

Technical data


Standards: IEC/EN 60947-5-1
 Enclosure: cast iron, galvanised, chromated, paint finish
 Protection class: IP 65 to EN 60529
 Contact material: silver
 Switching system: slow action, double break
 Contact type: positive break NC contacts \ominus
 Termination: screw terminals M 5
 Cable section: max. 4 mm² (incl. conductor ferrules)
 U_{imp}: 6 kV
 U_i: 500 V
 I_{the}: 25 A
 I_e/U_e: 25 A / 400 VAC
 Utilisation category: AC-15
 Max. fuse rating: 16 A gL/gG D-fuse
 Max. motor power consumption: with 400 V 3-phase 5.5 kW (squirrel-cage rotor n = 1500 rpm)
 Contact opening: max. 2 x 4 mm
 Ambient temperature: - 30 °C ... + 90 °C
 Mechanical life: 1 million operations
 Switching frequency: max. 1000/h
 Actuating speed: max. 3 m/s, min. 0.05 m/s
 Actuating angle: max. 30°
 Weight: approx. 3.5 kg

Contact variants


Roller lever 1 NO / 1 NC



only NO



only NC



Approvals




Ordering details

T ① 064-②y-③

| No. | Replace | Description |
|-----|---------|--|
| ① | | For the appropriate actuator: see page 1-146 |
| ② | 03 | 3 NC |
| | 12 | 1 NO/2 NC |
| | 21 | 2 NO/1 NC |
| | 30 | 3 NO |
| | 01/02 | 1 NC left/2 NC right |
| | 02/01 | 2 NC left/1 NC right |
| | 10/20 | 1 NO left/2 NO right |
| | 20/10 | 2 NO left/1 NO right |
| ③ | ü | Slow action with overlapping contacts |
| | h | with staggered contacts |
| | r | Position latching 2 x 45° |

Force-travel diagram

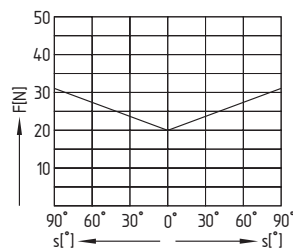


Note

The contact combinations can be found in the table on page 1-32.

A selection of turning levers can be found on page 1-146.


Position and limit switches

Roller lever L

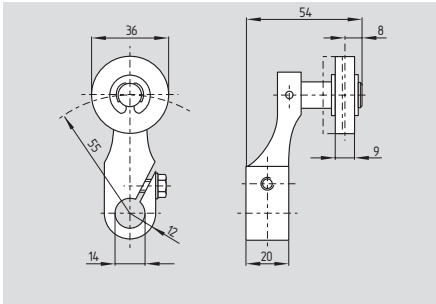


- Actuating speed max. 3 m/s with an actuating angle of α and $\beta = 30^\circ$
- Plastic roller
- Continuous adjustment of lever position 360°
- Splined shaft and lever available with 10° tothing
- Available with metal roller
- Available with rubber roller, ordering suffix -1

Roller lever V

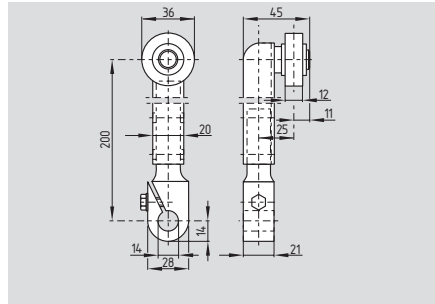


- Actuating speed max. 3 m/s with an actuating angle of α and $\beta = 30^\circ$
- Plastic roller
- Continuous adjustment of lever position 360°
- Splined shaft and lever available with 10° tothing
- Available with metal roller
- Available with rubber roller, ordering suffix -1

Fork lever C

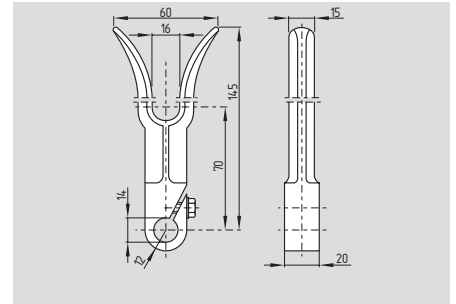


- Continuous adjustment of lever position 360°
- Splined shaft and lever available with 10° tothing

Roller lever A

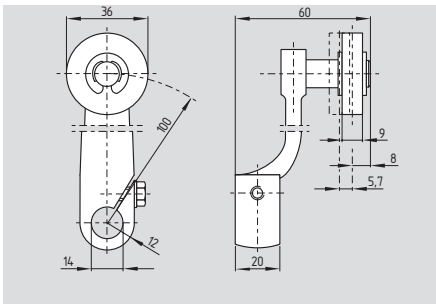


- Actuating speed max. 3 m/s with an actuating angle of α and $\beta = 30^\circ$
- Plastic roller
- Continuous adjustment of lever position 360°
- Splined shaft and lever available with 10° tothing
- Available with metal roller
- Available with rubber roller, ordering suffix -1

Pull lever Z

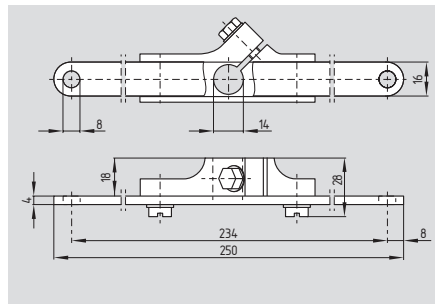


- Continuous adjustment of lever position 360°
- Splined shaft and lever available with 10° tothing

Offset roller lever 4D

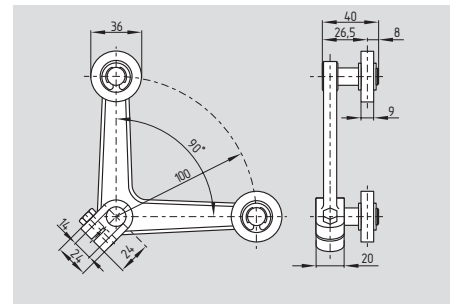


- Continuous adjustment of lever position 360°
- Splined shaft and lever available with 10° tothing

Roller lever 2A

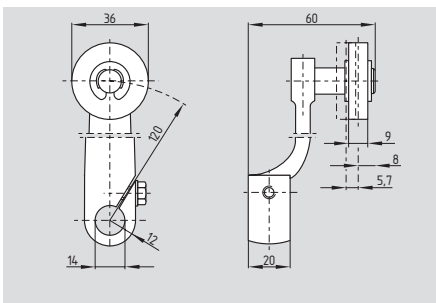

- Actuating speed max. 3 m/s with an actuating angle of α and $\beta = 30^\circ$
- Plastic roller
- Continuous adjustment of lever position 360°
- Splined shaft and lever available with 10° tothing
- Available with metal roller
- Available with rubber roller, ordering suffix -1

Pull lever 2Z

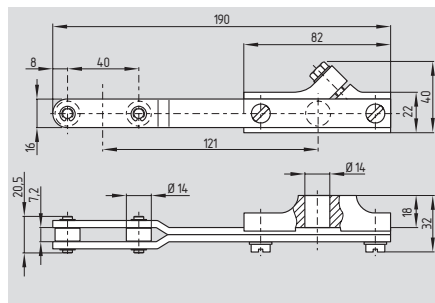

- Continuous adjustment of lever position 360°
- Splined shaft and lever available with 10° tothing

Legend

α : Actuating angle from right of switch axis
 β : Actuating angle from left of switch axis