


480 Rated Voltage, 600 Max Voltage, High Z, Impedance.							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Terminal Hole Size (Inches)
KDRF2HE3R	60	77	77	408	63	226	0.313

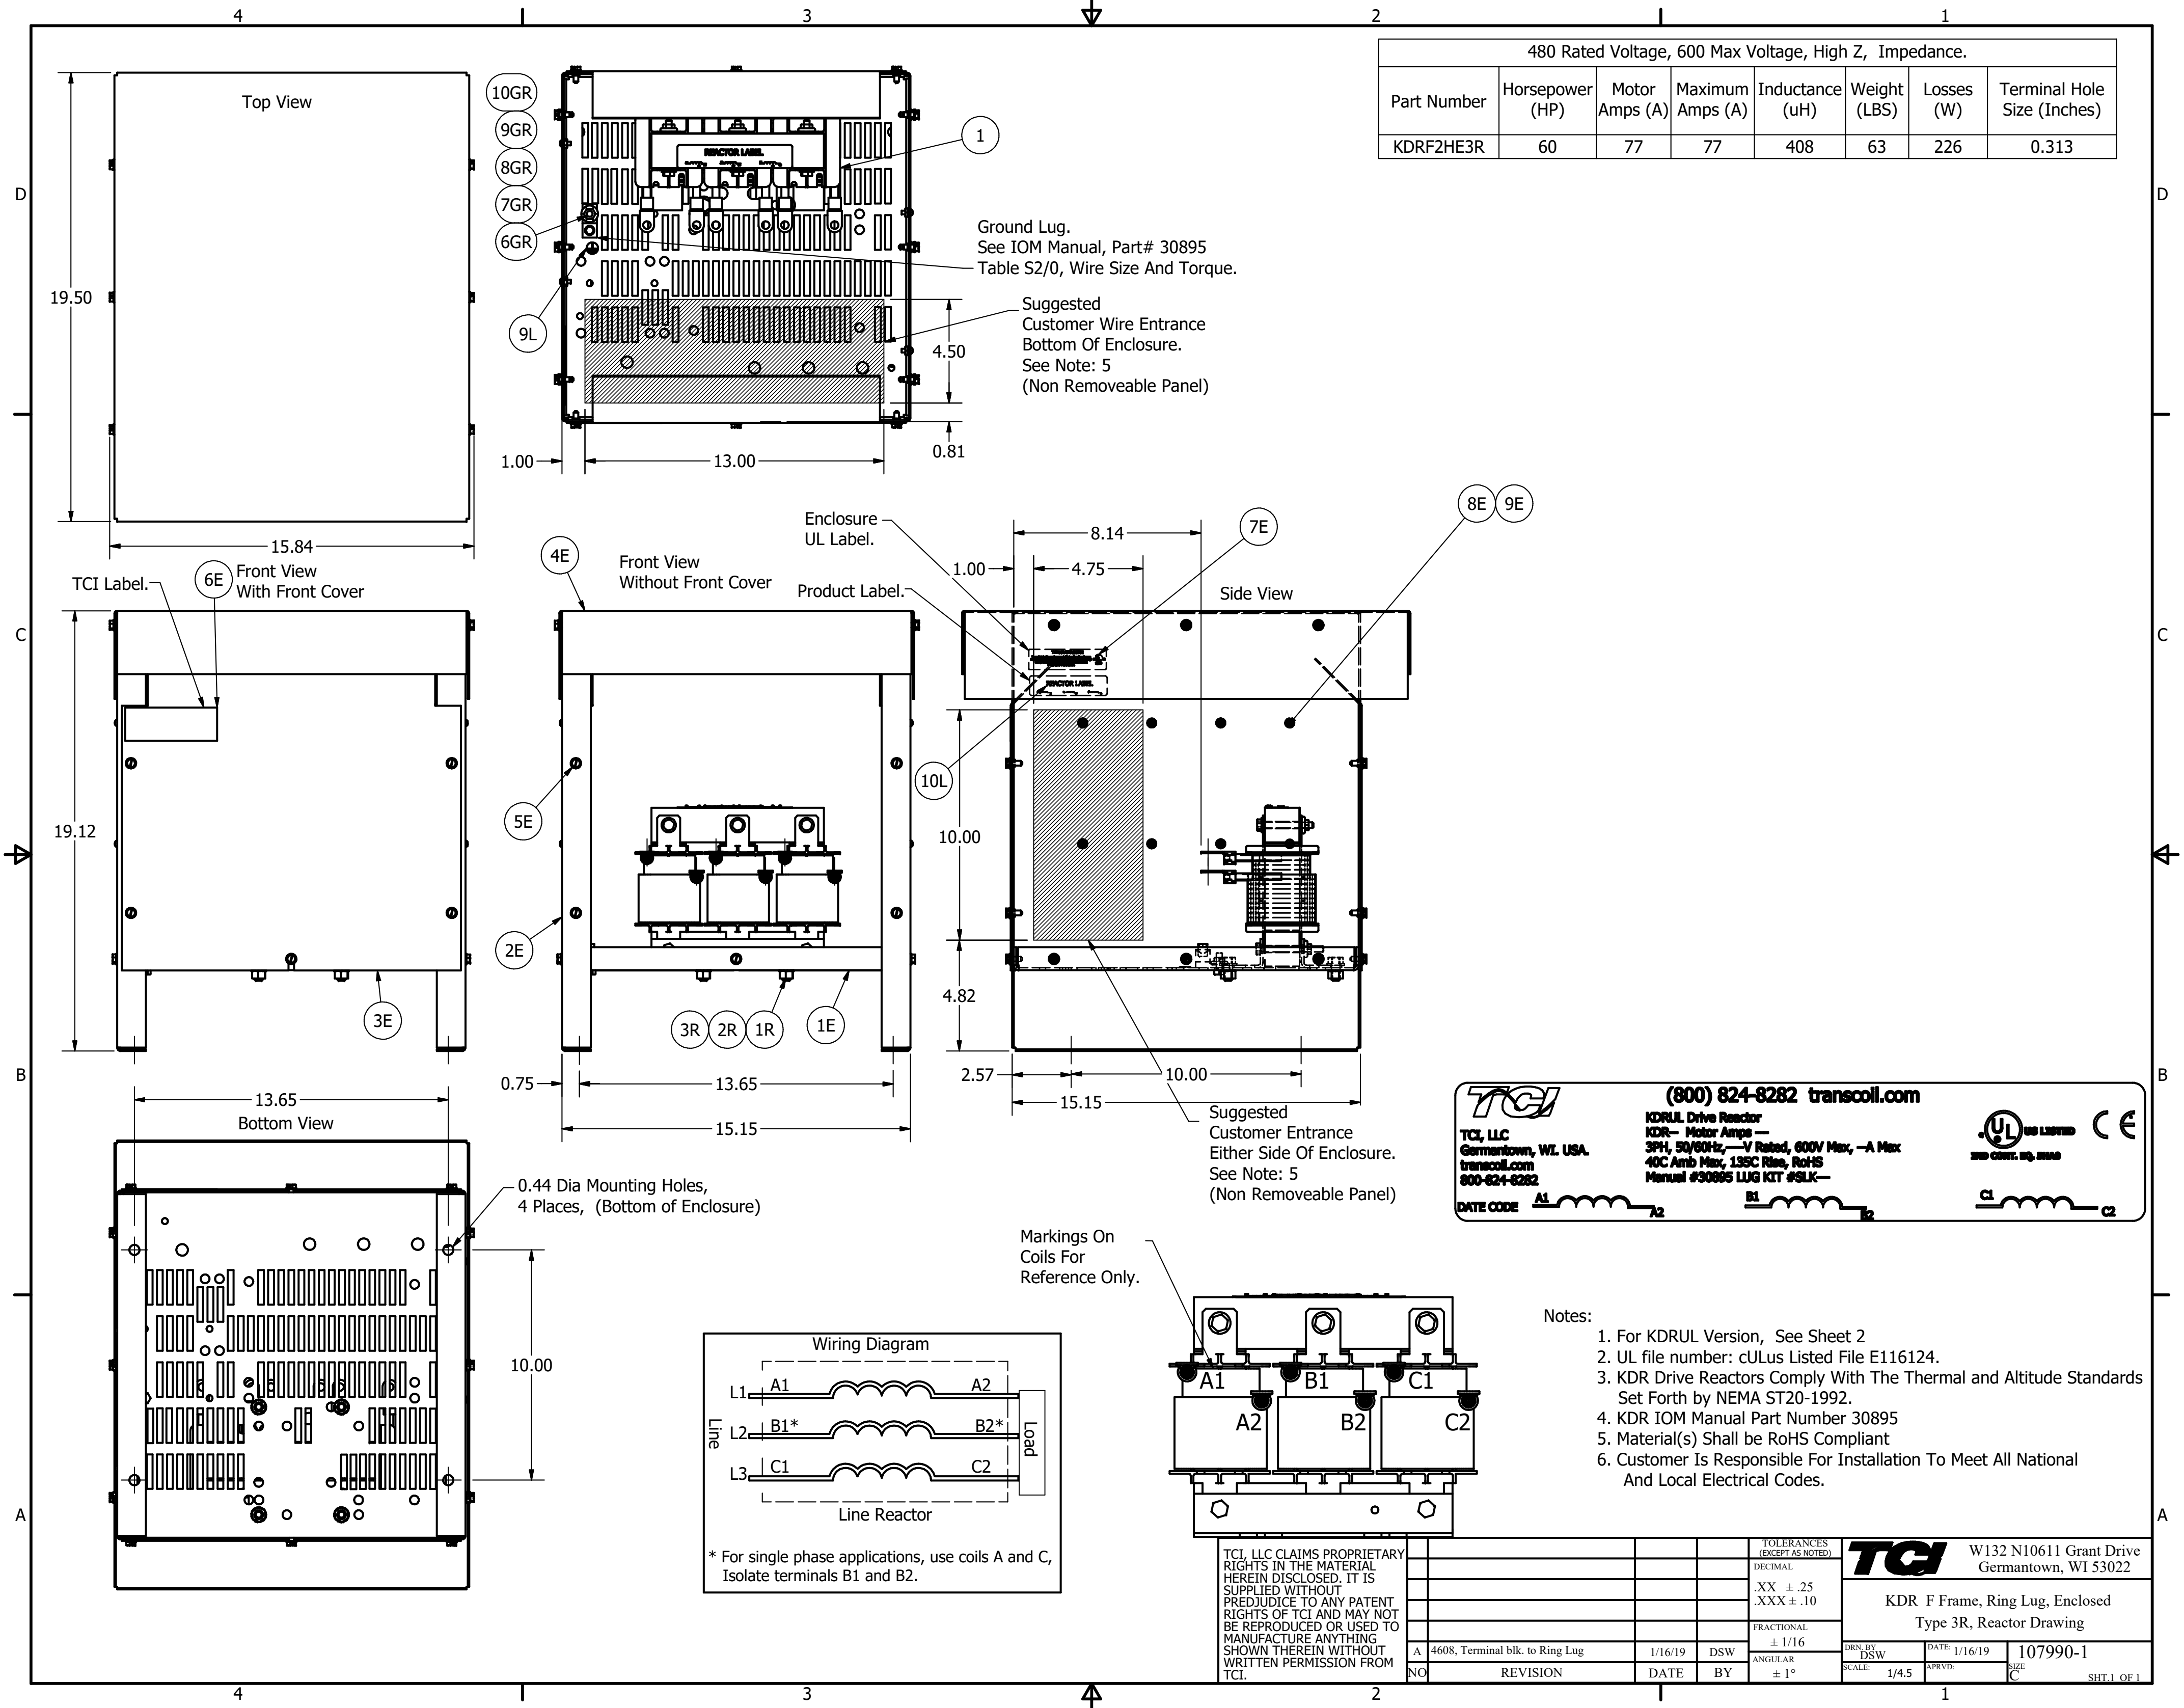

TCI (800) 824-8282 transcoll.com

TCI, LLC
 Germantown, WI, USA.
transcoll.com
 800-824-8282

KDRUL Drive Reactor
 KDR— Motor Amps —
 3PH, 50/60Hz, —V Rated, 600V Max, —A Max
 40C Amb Max, 135C Rise, RoHS
 Manual #30895 LUG KIT #SLK—

UL LISTED
 500 CONF. EQ. MARK

DATE CODE **A1** **B1** **C1**

- Notes:
1. For KDRUL Version, See Sheet 2
 2. UL file number: cULus Listed File E116124.
 3. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
 4. KDR IOM Manual Part Number 30895
 5. Material(s) Shall be RoHS Compliant
 6. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°		W132 N10611 Grant Drive Germantown, WI 53022 KDR F Frame, Ring Lug, Enclosed Type 3R, Reactor Drawing	
A	4608, Terminal blk. to Ring Lug	1/16/19	DSW	DRN BY DSW	DATE 1/16/19	107990-1	
NO	REVISION	DATE	BY	SCALE 1/4.5	APRVD	SIZE C	SHT. 1 OF 1