

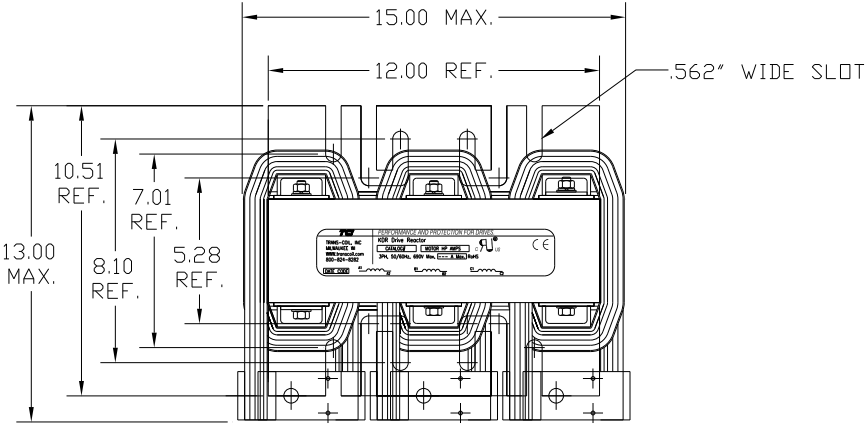



VOLTAGE 690	NEC MOTOR HP	CATALOG NO	NEC MOTOR CURRENT	AMPS MAX	WATTS LOSS	APPROX WT-LBS	TERMINAL HOLE SIZE
HIGH-Z	600	KDRS49HV	576	576	1194	175	.53 DIA

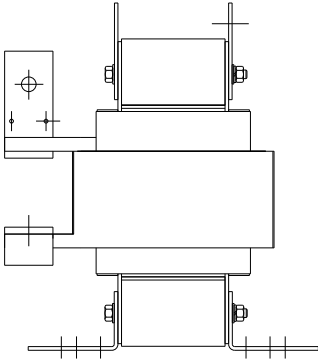

**TCI** PERFORMANCE AND PROTECTION FOR DRIVES.  
 KDR Drive Reactor  
 TRANS-COIL, INC MILWAUKEE WI WWW.transcoil.com 800-824-8282  
 CATALOG# MOTOR HP AMPS 3PH,50/60Hz, 690V Max, A Max, RoHS  
 DATE CODE A1 A2 B1 B2 C1 C2

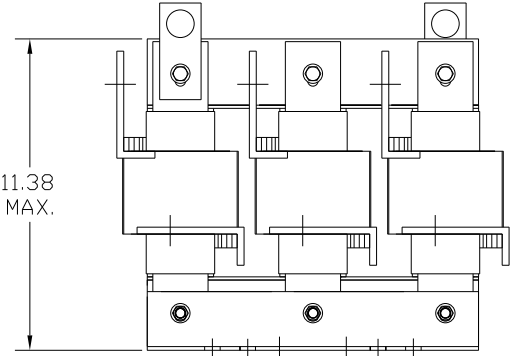

SUGGESTED 4.75" MOUNTING DISTANCE

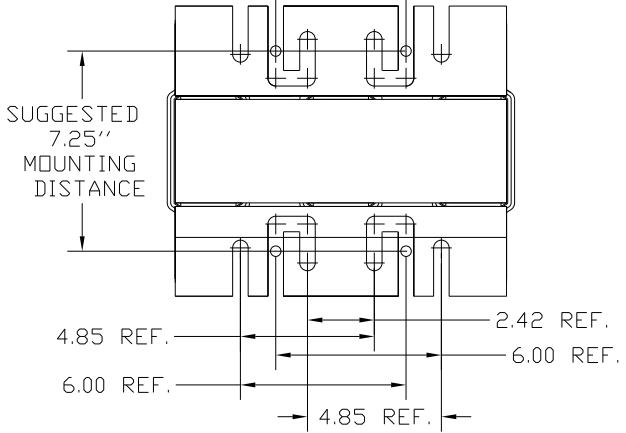

				TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL		KDR DRIVE REACTOR	
				.XX ± .03		690V HIGH Z, FRAME S	
				.XXX ± .01		DRN BY DSW DATE 02/06/07 DWG NO. B KDRS49HVDG	
				FRACTIONAL		SCALE TO FIT	
				± 1/32		APRVD. B SHT. 1 OF 1	
				ANGULAR			
				± 1/2°			
NO	REVISION	DATE	BY				