

Main Features

Reference	: CWB
Product code	: 12679555
Rated current Ie AC-3 (Ue ≤ 440 V)	: 32 A
Main contacts (power)	: 3 NO
Auxiliary contacts	: 1 NO + 1 NC
Control voltage	: 48V 50/60Hz
Type of terminal	: Screw

Basic data

Rated utilization voltage Ue	
- IEC / UL	: 690 V / 600 V
Isolation voltage Ui (pollution degree 3)	
- IEC / UL	: 690 V / 600 V
Rated impulse withstand voltage Uimp	: 6 kV
- Frequency limits [1]	: 25 Hz ... 400 Hz
- Mechanical lifespan	
AC-operated contactor	: 10 million
DC-operated contactor	: 10 million
Electrical lifespan - Ie AC3	: 1.6 million
Number of coil terminals (AC Coil)	
AC coil contactors	: 2
- DC coil contactors	: 2
Resistance to vibration (IEC 60068-2-6)	
opened contactor	: 4 g
closed contactor	: 4 g
Resistance to mechanical shock (½ sinusoid = 11ms)	
opened contactor	: 10 g
closed contactor	: 15 g
Installation	: DIN 35 mm (EN 50022)
Degree of protection (IEC 60529)	
Main circuit	: IP10
Control circuit	: IP20

Alternating current - control circuit

Isolation voltage Ui (pollution degree 3)	
- IEC / UL	: 690 V / 600 V
Standard voltages for 50/60 Hz	: 12...550 V
Command circuit operation limits	
- control circuit 60 Hz	
- pick up	: 0,5...0,8xUs
- drop out	: 0,2...0,6xUs
- control circuit 50 Hz	
- pick up	: 0,5...0,8xUs
- drop out	: 0,2...0,6xUs
- Average coil consumption	
- operating at 60 Hz	
- closed magnetic circuit	: 6...9 VA
- power factor (cos φ)	: 0.27
- Thermal power dissipated	: 1,5...2,5 W
- closing the magnetic circuit	: 60...90 VA
- operating at 50 Hz	
- closed magnetic circuit	: 7,2...10,8 VA
- power factor (cos φ)	: 0.24
- Thermal power dissipated	: 1,5...2,5 W
- closing the magnetic circuit	: 72...108 VA
Average time of operation	
- closing the NO contacts	: 15...25 ms
- opening the NO contacts	: 8...12 ms

Direct current - command circuit

- IEC / UL	
Standard voltages	:
Command circuit operation limits	
- pick up	:
- drop out	:
Average consumption	
- closed magnetic circuit	:
- closing the magnetic circuit	:
Thermal power dissipated	:
Average time of operation	
- closing the NO contacts	:
- opening the NO contacts	:

Main contacts (power)

Rated utilization current Ie	
- AC-3 (Ue ≤ 440 V)	: 32 A
- AC-4 (Ue ≤ 440 V)	: 13,7 A
- AC-1 (θ ≤ 55 °C, Ue ≤ 690 V)	: 50 A

DATASHEET

Contactors



Rated utilization voltage Ue	
- IEC / UL	: 690 V / 600 V
Number of main contacts	: 3 NO
Establishment capacity (IEC 60947)	: 550 A
Breaking capacity (IEC/EN 60947)	
- Ue≤400V	: 550 A
- Ue=500V	: 450 A
- Ue=690V	: 350 A
Temporary permissible current (without previously current conduction during 15 min at $\theta \leq 40^\circ\text{C}$)	
- 1 sec	: 400 A
- 1 sec	: 260 A
- 1 sec	: 260 A
- 1 min	:
- 10 min	: 60 A
Protection against short circuit of the contacts main fuse (gL/gG)	
- @600V - UL/CSA	: 5 kA
- type 1 coordination	: 63 A
- type 2 coordination	: Not available
Average power dissipated per pole	
AC-1 ($\theta \leq 55^\circ\text{C}$, Ue \leq 690 V)	: 5 W
AC-3 (Ue \leq 440 V)	: 2 W
Utilization category AC-3	
Rated current Ie ($\theta \leq 55^\circ\text{C}$)	
- Ue \leq 440V	: 32 A
- Ue \leq 500V	: 28,5 A
- Ue \leq 690V	: 21 A
Maximum percentage (600 ops./h)	: 100 %

Orientative values of power (IEC)-three-phase induction motors (50/60 Hz)-IV poles-1800 rpm

Voltage	kW	cv or HP
220 / 240 V	7,5 kW	10 HP
380 / 400 V	15 kW	20 HP
415 / 440 V	15 kW	20 HP
500 V	18,5 kW	25 HP
660 / 690 V	18,5 kW	25 HP

Orientative values of power (UL)

Voltage	1 Phase	3 Phase
120 V	3	Not available
200 V	Not applicable	10
208 V	Not available	Not available
240 V	5	10
480 V	Not available	20
600 V	Not available	25

Utilization category AC-4

Rated current Ie ($\theta \leq 55^\circ\text{C}$)	
- Ue \leq 440V	: 13,7 A
- Ue \leq 500V	: 13,9 A
- Ue \leq 690V	: 12,8 A

Orientative values of power (IEC)-three-phase induction motors (50/60 Hz)-IV poles-1800 rpm

Voltage	kW	cv or HP
220 / 240 V	4 kW	5,4 HP
380 / 400 V	7,5 kW	10.1 HP
415 / 440 V	7,5 kW	10,1 HP
500 V	9 kW	12,1 HP
660 / 690 V	11 kW	14,7 HP

Utilization category AC-1 (3 P/NA)

Maximum percentage (600 ops./h)	: 1
---------------------------------	-----

Maximum power operation $\theta \leq 55^\circ\text{C}$ (three resistors)

Voltage	Power
220 / 240 V	19 kW
380 / 400 V	33 kW
415 / 440 V	38 kW
500 V	43 kW
660 / 690 V	57 kW

Auxiliary contacts

Standards compliance	: IEC 600947-5-1
Insulation voltage Ui	
- IEC / UL	: 1000 V / 600 V
Rated utilization voltage Ue	
- IEC / UL	: 690 V / 690 V

DATASHEET

Contactors



Conventional thermal current I_{th} ($\theta \leq 55^\circ\text{C}$)	: 10 A
Rated current I_e - IEC 60947-5-1/AC-15	
- 220 / 240 V	: 10 A
- 380 / 440 V	: 4 A
- 500 V	: 2,5 A
- 660 / 690 V	: 1,5 A
Rated current I_e - IEC 60947-5-1/DC-13	
- 24 V	: 4 A
- 48 V	: 2 A
- 110 V	: 0,7 A
- 220 V	: 0,3 A
- 440 V	: 0,15 A
Establishment capacity - (AC-15 and $U_e \leq 690\text{V}$ 50/60Hz)	: 10 x I_e
Interruption capacity - (AC-15 and $U_e \leq 400\text{V}$ 50/60Hz)	: 1 x I_e
Protection against short circuit of the contacts main fuse (gL/gG)	: 10 A
Control circuit reliability	: 17/5 V/mA
Electrical lifespan	: 1 Million
Mechanical lifespan	: 10 million
Non-overlapping time between NO and NC contacts	: 1,5 ms
Impedance per pole	: 2,5 m Ω

Connection

Main contacts	
Type of the screw	: M4 Flat/Phillips
Section of the conductors	

Type of the conductor	Section (IEC)	Section (UL)
Rigid cable	1 x 2,5...10 mm ²	1 x
	2 x 2,5...10 mm ²	2 x
Flexible cable without terminal	1 x 2,5...10 mm ²	1 x
	2 x 2,5...10 mm ²	2 x
Flexible cable with terminal	1 x 1,5...10 mm ²	1 x
	2 x 1,5...6 mm ²	2 x

Tightening torque (IEC/UL)	: 2.5 Nm / 22 lb.in
Control circuit	
Type of the screw	: M3,5 Flat/Phillips
Section of the conductors	

Type of the conductor	Section (IEC)	Section (UL)
Rigid cable	1 x 1...4 mm ²	1 x
	2 x 1...4 mm ²	2 x
Flexible cable without terminal	1 x 1...4 mm ²	1 x
	2 x 1...4 mm ²	2 x
Flexible cable with terminal	1 x 1...4 mm ²	1 x
	2 x 1...2,5 mm ²	2 x

Tightening torque (IEC/UL)	: 1 Nm / 8.8 lb.in
----------------------------	--------------------

Direct current application

Utilization category DC-1 ($L/R \leq 1$ ms)

Voltage	Rated utilization current (I_e)			
	Pole(s) in series			
	1	2	3	4
$U_e \leq 24\text{V}$	40 A	40 A	40 A	Not available
$U_e \leq 48\text{V}$	40 A	40 A	40 A	Not available
$U_e \leq 60\text{V}$	40 A	40 A	40 A	Not available
$U_e \leq 125\text{V}$	7 A	40 A	40 A	Not available
$U_e \leq 220\text{V}$	1 A	7 A	40 A	Not available
$U_e \leq 440\text{V}$	0,5 A	1 A	7 A	Not available
$U_e \leq 600\text{V}$	Not available	0,5 A	1 A	Not available

Utilization category DC-3 ($L/R \leq 2.5$ ms)

Voltage	Rated utilization current (I_e)			
	Pole(s) in series			
	1	2	3	4
$U_e \leq 24\text{V}$	36 A	36 A	36 A	Not available
$U_e \leq 48\text{V}$	36 A	36 A	36 A	Not available
$U_e \leq 60\text{V}$	36 A	36 A	36 A	Not available
$U_e \leq 125\text{V}$	3 A	36 A	36 A	Not available
$U_e \leq 220\text{V}$	0,5 A	3 A	36 A	Not available
$U_e \leq 440\text{V}$	Not available	0,5 A	3 A	Not available
$U_e \leq 600\text{V}$	Not available	Not available	1,5 A	Not available

Operation category DC-5 ($L/R \leq 15$ ms)

Rated utilization current (I_e)			
-------------------------------------	--	--	--

DATASHEET

Contactors



Voltage	Pole(s) in series			
	1	2	3	4
Ue ≤ 24V	36 A	36 A	36 A	Not available
Ue ≤ 48V	36 A	36 A	36 A	Not available
Ue ≤ 60V	36 A	36 A	36 A	Not available
Ue ≤ 125V	3 A	36 A	36 A	Not available
Ue ≤ 220V	Not available	3 A	36 A	Not available
Ue ≤ 440V	Not available	Not available	3 A	Not available
Ue ≤ 600V	Not available	Not available	Not available	Not available

Ambient temperature

Operation : -25 °C ... +55 °C
 Storage : -55 °C ... +80 °C
 Maximum altitude with no change of rated values [2] : 3000 m

Dimensions

Height : 85 mm (3.35 in)
 Width : 45 mm (1.77 in)
 Depth : 93 mm (3.66 in)
 Weight : 490 g

Standards

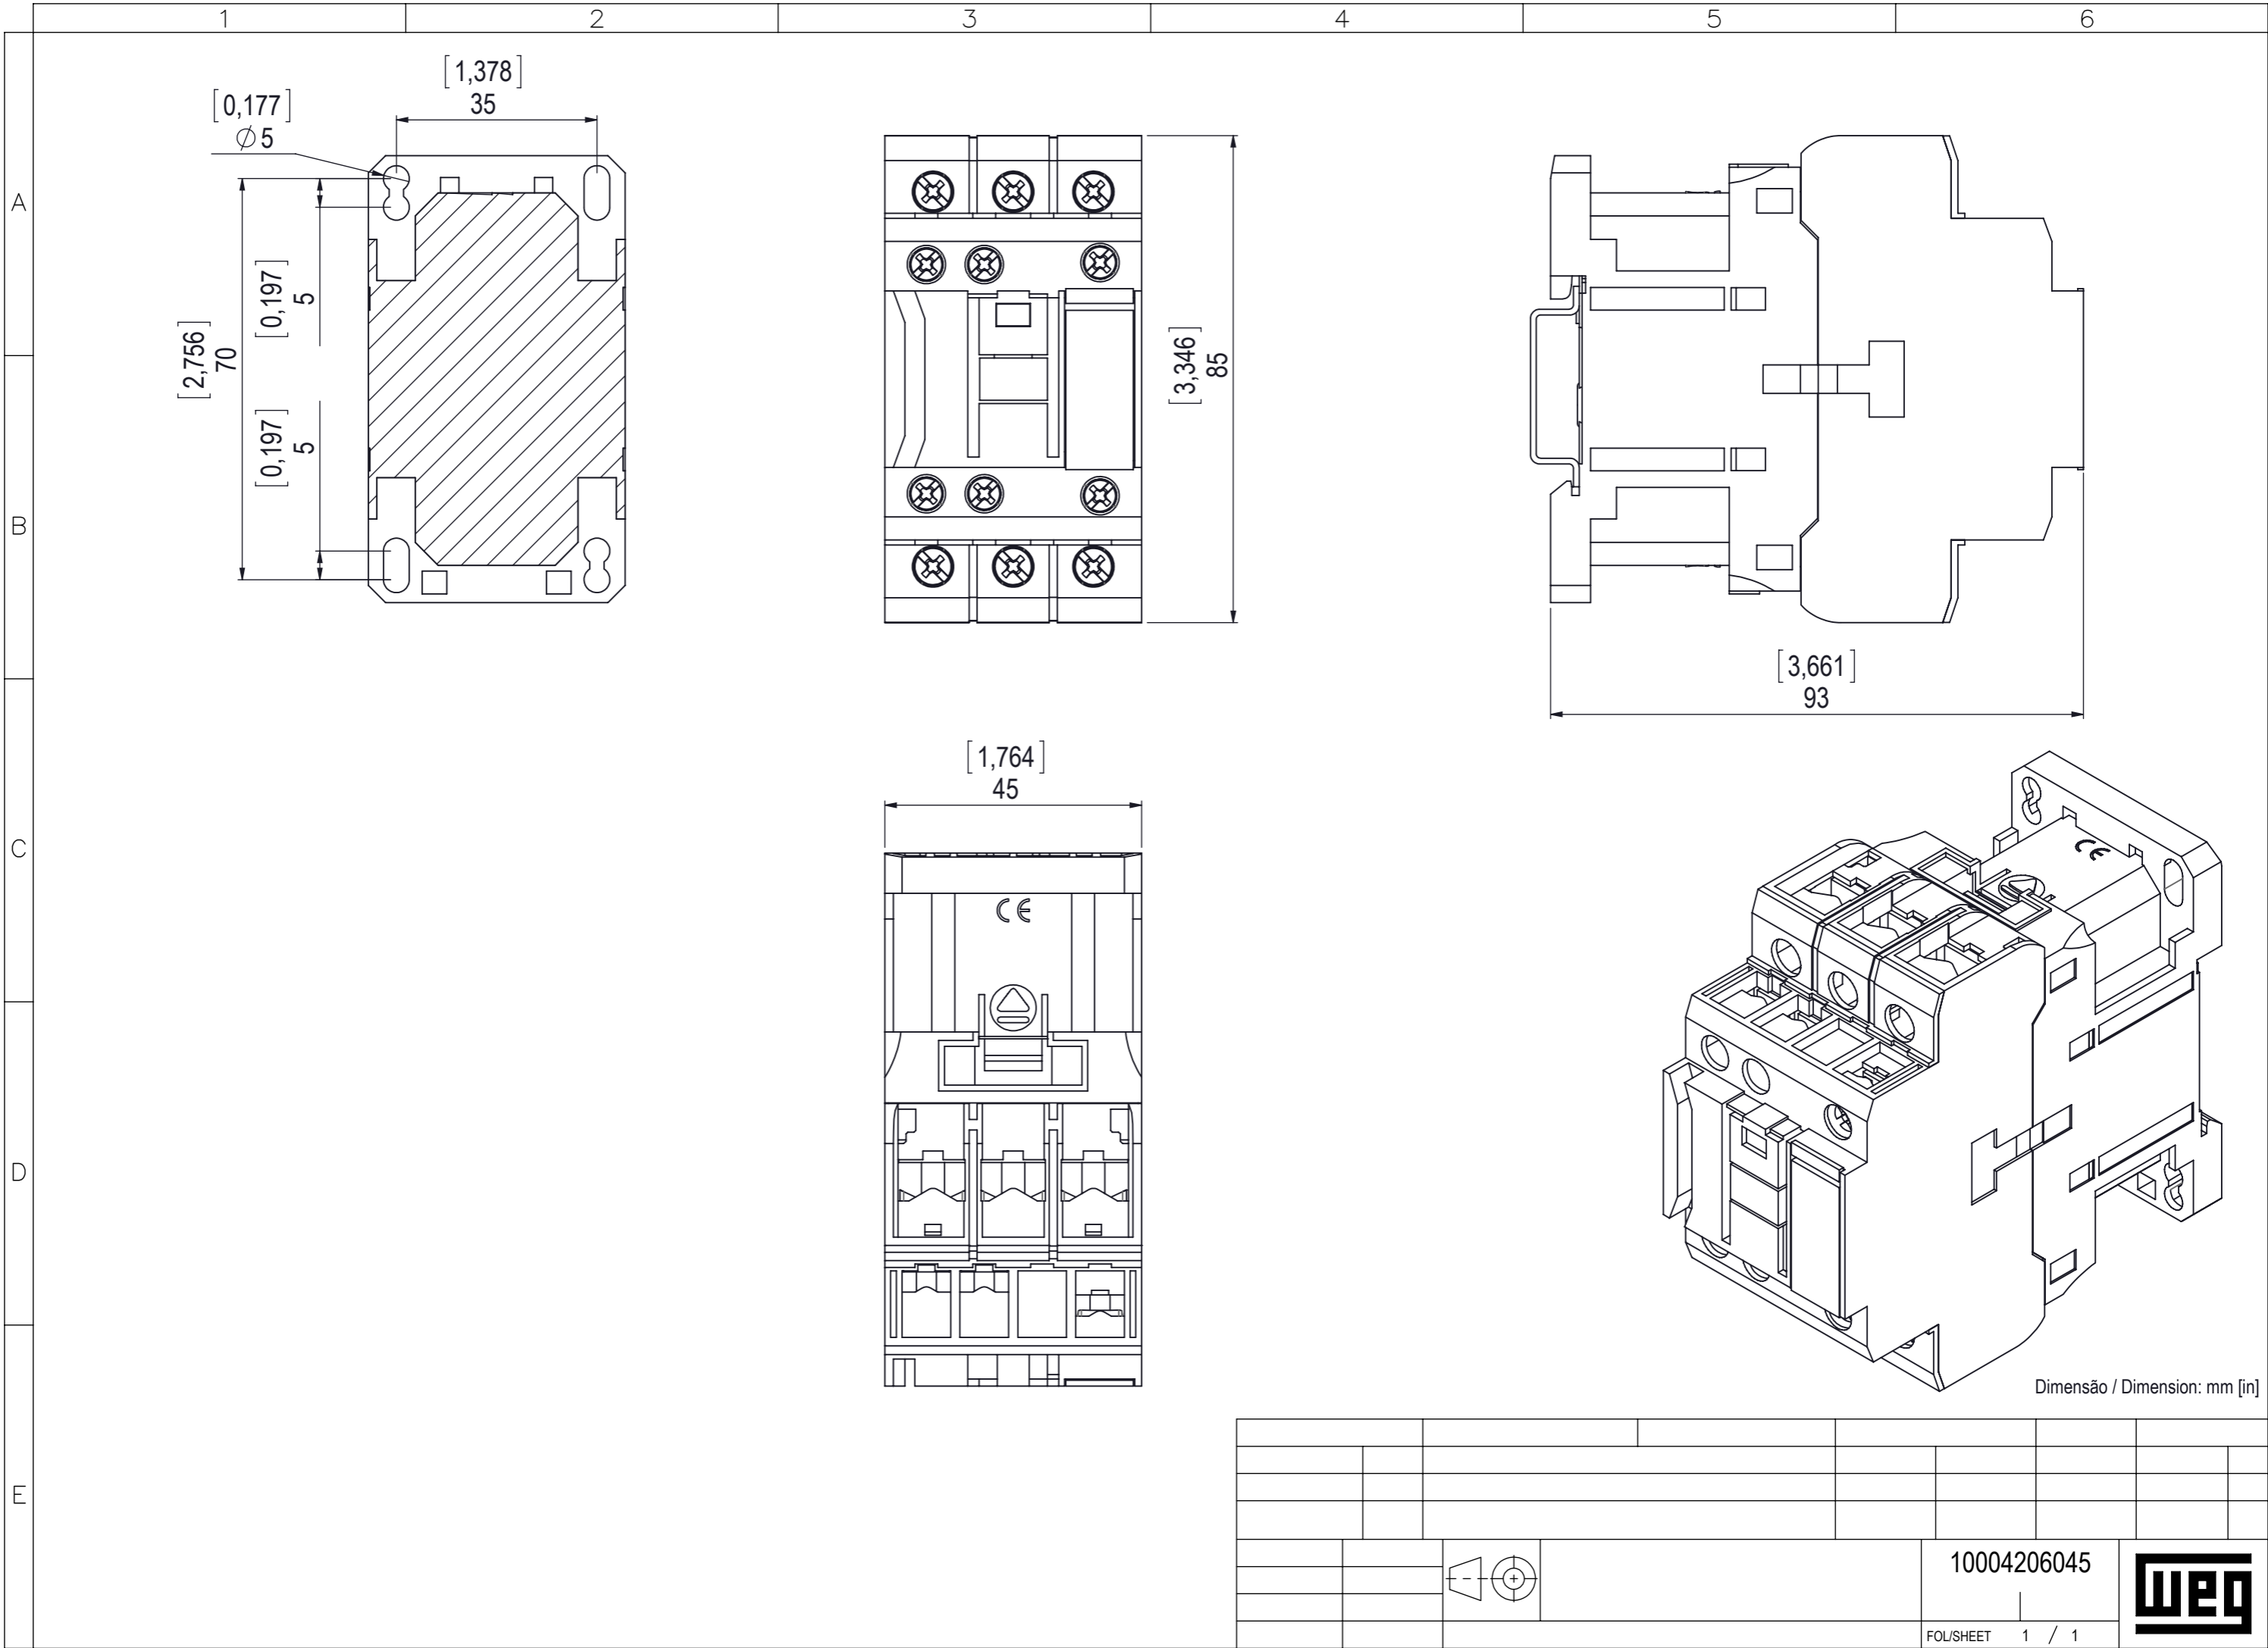
IEC 60947-1
 UL 508



Certifications

CE, UL, UL-NOM and EAC

Notes

- 1) Values above 60 Hz should have current reduction;
- 2) For altitudes of 3000 to 4000 m (0.90 x 0.80 x Ie and Ui) and from 4000 to 5000 m (0.80 x 0.75 x Ie and Ui).



					10004206045	
				FOL/SHEET	1 / 1	