
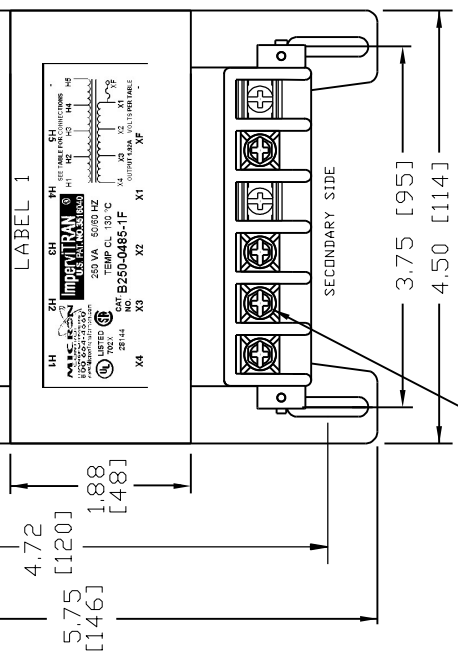


IND. BOX LABEL

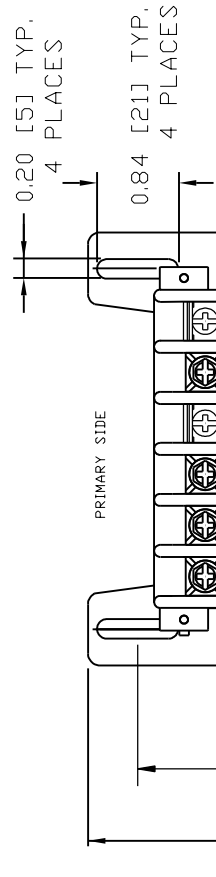

TERMINAL SCREWS ARE COMBINATION 10-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

MICRON
TRANSFORMERS
800 664-4660
www.MicronTransformers.com

250 VA
PRIMARY:
208/600
SECONDARY:
95/1130
FREQUENCY:
50/60 HZ
MADE IN USA

QTY. 1

B250-0485-1F

28144

LABEL 2

INPUT VOLTAGE	H1-H3	H1-H4	H1-H5	OUTPUT VOLTAGE (FUSED)	XF-X3	XF-X4
208	380	440	500	85	100	110
220	380	440	550	91	110	120
230	400	460	575	95	115	125
240	415	480	600	99	120	130


SECONDARY SIDE

PRIMARY SIDE

Transformer Specifications

PRIMARY VOLTAGE(S)	230/400/460/575 (UNIVERSAL)
SECONDARY VOLTAGE(S)	95/115/125
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	10.0 LBS

FOR TEST REQUIREMENTS SEE 415-0143F COIL TEST PAGE

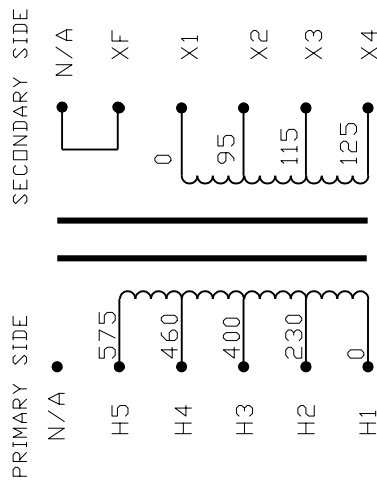



PRIMARY SIDE

SECONDARY SIDE

INTERNALLY JUMPERED TO FUSE TERMINAL

CONNECTION DIAGRAM

NOTES:
1. ALL MEASUREMENTS IN INCHES (MM)

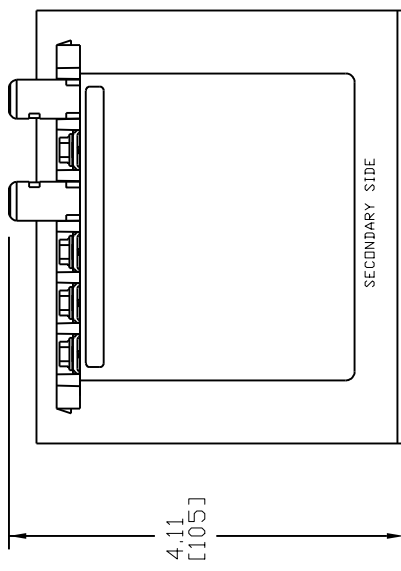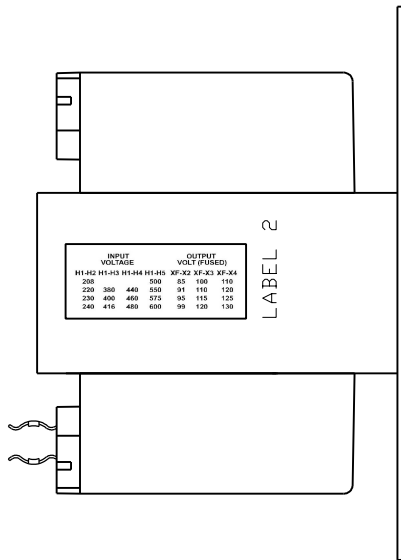

PACKAGED ACCESSORIES

1	
-	
-	

MICRON
TRANSFORMERS
800 664-4660
www.MicronTransformers.com

250 VA 50/60 HZ
TEMP CL 130 C
B250-0485-1F

LISTED 702K
28144

IMPERVITRAN
U.S. PAT. NO. 3,160,410

SH TABLE FOR COIL COLORS:
H1 H2 H3 H4 H5
XF XF XF XF XF

OUTPUT 1.97A VOL IS PER TABLE

1H 2H 3H 4H 5H
X4 X3 X2 X1
X4 X3 X2 X1

MICRON
TRANSFORMER
1211 W. 22ND STREET, SUITE 200, DAK BROOK, ILL.
Tel: (800)664-4660 Fax: (630)516-1822
www.MicronTransformers.com

DATE: 1/21/08
RELEASE DATE: 1/21/08
MICRON PART NO: B250-0485-1FH7777A0
SCALE: C
NDNE: B250-0485-1F

DATE	1/21/08	BRANN	J.G.V	CHECKED	APPROVED
RELEASE DATE	1/21/08	BRANN	J.G.V	CHECKED	APPROVED
MICRON PART NO.	B250-0485-1FH7777A0				
DRAWING UPDATED	J.V	8/15/13			
H REVISED	J.V	1/21/08			
ECL	BY	DATE			