







Screw Clamp Terminal Blocks

Key Features

- Housing made of high quality Polyamide 6.6
- Molded from UL94-V0 material with flame and shock resistance
- Mount on any standard 35mm DIN Rails
- Vibration proof to avoid loosening
- Strong contact force, low voltage drop and excellent connection.
- Low contact resistance
- Suitable for a broad range of cross-section and types of wires
- Easy handling and wiring
- Green-yellow color coded ground terminal blocks.
- Corrosion proof contact points.



| Model | CDU 2.5N | | | CDU 4N | | |
|------------------|----------------------------------|---------------|------------------------|----------------------------|---------------|----------------------|
| | Rated Voltage | Rated Current | Wire Size | Rated Voltage | Rated Current | Wire Size |
| Technical Data | 600V | 20A | AWG12-28 | 600V | 30A | AWG10-22 |
| | 800V | 24A | 0.5-2.5mm ² | 800V | 32A | 0.5-4mm ² |
| Torque (lb-in) | 7 | | | 7.7 | | |
| Clamping Screw | M3 | | | M3 | | |
| Stripping length | 8-10mm | | | 8-10mm | | |
| Available colors | Beige, Grey, Blue | | | Beige, Grey, Blue | | |
| Accessories | | | | | | |
| End Bracket | SEW35 | | | SEW35 | | |
| | CEW35/2 | | | CEW35/2 | | |
| End Cover | CEP6 | | | CEP6 | | |
| Cross Jumper | CQV 2.5/2 | | CQV 2.5/3 | CQV 4/2 | | CQV 4/3 |
| | CQV 2.5/4 | | CQV 2.5/10 | CQV 4/4 | | CQV 4/10 |
| Comb Link | CQB 2.5/2, CQB 2.5/3, CQB 2.5/10 | | | CQB 4/2, CQB 4/3, CQB 4/10 | | |
| Warning Cover | WSS 2.5 | | | WSS4 | | |
| Marking Tags | W5 W5Z W5K | | | W6 W6Z W6K | | |



| Model | CDU 6N | | |
|------------------|----------------------------|---------------|---------------------|
| | Rated Voltage | Rated Current | Wire Size |
| Technical Data | 600V | 50A | AWG8-26 |
| | 800V | 57A | 4-35mm ² |
| Torque (lb-in) | 14 | | |
| Clamping Screw | M4 | | |
| Stripping length | 10-12mm | | |
| Available colors | Beige, Grey, Blue | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| | CEW35/2 | | |
| End Cover | CEP6 | | |
| Cross Jumper | CQV 6/2 | | CQV 6/3 |
| | CQV 6/4 | | CQV 6/10 |
| Comb Link | CQB 6/2, CQB 6/3, CQB 6/10 | | |
| Warning Cover | WSS6 | | |
| Marking Tags | W6 W6Z W6K | | |


| Model | CDU 10N | | |
|------------------|-------------------------------|---------------|----------------------|
| | Rated Voltage | Rated Current | Wire Size |
| Technical Data | 600V | 65A | AWG6-24 |
| | 800V | 76A | 16-50mm ² |
| Torque (lb-in) | 19 | | |
| Clamping Screw | M4 | | |
| Stripping length | 10-12mm | | |
| Available colors | Beige, Grey, Blue | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| | CEW35/1 | | |
| End Cover | CEP6 | | |
| Cross Jumper | CQV 10/2 | | CQV 10/3 |
| | CQV 10/4 | | CQV 10/10 |
| Comb Link | CQB 10/2, CQB 10/3, CQB 10/10 | | |
| Warning Cover | WSS10 | | |
| Marking Tags | W6 W6Z W6K | | |


| Model | CDU 16 | | |
|------------------|------------------------------|---------------|-----------------------|
| | Rated Voltage | Rated Current | Wire Size |
| Technical Data | 600V | 78A | AWG4-14 |
| | 1000V | 76A | 2.5-16mm ² |
| Torque (lb-in) | 31 | | |
| Clamping Screw | M5 | | |
| Stripping length | 15-17mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| | CEW35/1 | | |
| End Cover | CEP2 | | |
| Cross Jumper | CQV 16/2 | | CQV 16/3 |
| | CQV 16/4 | | CQV 16/10 |
| Comb Link | CQB 16/2, CQB 16/3, CQB 6/10 | | |
| Warning Cover | WS-16 | | |
| Marking Tags | W6 W6Z W6K | | |
| | W8 W8Z W8K | | |


| Model | CDU 35 | | |
|------------------|-------------------------------|---------------|---------------------|
| | Rated Voltage | Rated Current | Wire Size |
| Technical Data | 1000V | 114A | AWG2-10 |
| | 1000V | 125A | 4-35mm ² |
| Torque (lb-in) | 51 | | |
| Clamping Screw | M6 | | |
| Stripping length | 16-18mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| | CEW35/1 | | |
| End Cover | CEP2 | | |
| Cross Jumper | CQV 35/2 | | CQV 35/3 |
| | CQV 35/4 | | CQV 35/10 |
| Comb Link | CQB 35/2, CQB 35/3, CQB 35/10 | | |
| Warning Cover | WS-35 | | |
| Marking Tags | W6 W6Z W6K | | |
| | W8 W8Z W8K | | |

| Model | CDU 50 | | |
|------------------|--------------------|---------------|----------------------|
| | Rated Voltage | Rated Current | Wire Size |
| Technical Data | 1000V | 150A | AWG1/0-6 |
| | 1000V | 150A | 16-50mm ² |
| Torque (lb-in) | 53 | | |
| Clamping Screw | M6 | | |
| Stripping length | 25-30mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| | CEW35/1 | | |
| End Cover | CEP2 | | |
| Cross Jumper | CQV 50/2 | | |
| | CQV 50/3 | | |
| Comb Link | CQB 50/2, CQB 50/3 | | |
| Warning Cover | WS-50 | | |
| Marking Tags | W6 W6Z W6K | | |
| | W8 W8Z W8K | | |

Screw Clamp Miniature Terminal Blocks

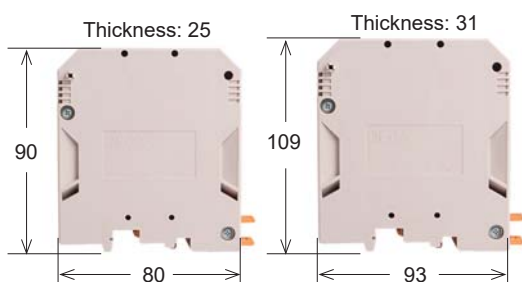


| Model | CDU 95  | | | CDU 150 | | |
|------------------|--|---------------|----------------------|--------------------------|---------------|-----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 1000V | 230A | AWG4/0-2 | 600V | 275A | AWG2-300 |
| IEC | 1000V | 232A | 35-95mm ² | 1000V | 309A | 35-150mm ² |
| Torque (lb-in) | 150 | | | 165 | | |
| Clamping Screw | M8 | | | M10 | | |
| Stripping length | 30-35mm | | | 30-40mm | | |
| Available colors | Beige | | | Beige | | |
| Accessories | | | | | | |
| End Bracket | SEW35 CEW35/1 | | | CEW35/1 | | |
| Comb Link | CQB 95/2, CQB 95/3 | | | CQB 105/2 | | |
| Marking Tags | W6 W6Z W6K W8 W8Z W8K | | | W6 W6Z W6K W8 W8Z W8K | | |

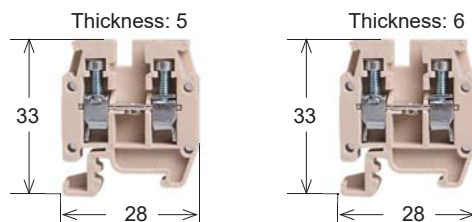


| Model | CDU 2.5M | | | CDU 4M | | |
|------------------|---|---------------|------------------------|-----------------------------------|---------------|----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 300V | 20A | AWG12-28 | 300V | 30A | AWG10-22 |
| IEC | 400V | 24A | 0.2-2.5mm ² | 500V | 30A | 0.5-4mm ² |
| Torque (lb-in) | 7 | | | 7.7 | | |
| Clamping Screw | M2.6 | | | M3 | | |
| Stripping length | 6mm | | | 6mm | | |
| Available colors | Beige | | | Beige | | |
| Accessories | | | | | | |
| End Bracket | CEW15 | | | CEW15 | | |
| End Cover | CEP7 | | | CEP7 | | |
| Cross Jumper | CQVM 2.5/2 CQVM 2.5/3 CQVM 2.5/10 | | | CQVM 4/2 CQVM 4/3 CQVM 4/10 | | |
| Comb Link | CQB 2.5/2, CQB 2.5/3 | | | CQB 4/2, CQB 4/3 | | |
| Marking Tags | W5 W5Z W5K | | | W6 W6Z W6K | | |

Fuse Holder



| Model | CTR4SI-EN | | |
|------------------|----------------------------------|---------------|----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 7.5A | AWG10-22 |
| IEC | 800V | 10A | 0.5-4mm ² |
| Torque (lb-in) | 7.7 | | |
| Clamping Screw | M3 | | |
| Stripping length | 10-12mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 SEW35 | | |
| End Cover | CEP1 | | |
| Comb Link | CQB 2.5/2, CQB 2.5/3, CQB 2.5/10 | | |
| Diode Plug | CSD2.5 | | |
| Marking Tags | W5 W5Z W5K W7 W7Z W7K | | |

Screw Clamp Ground Terminal Blocks

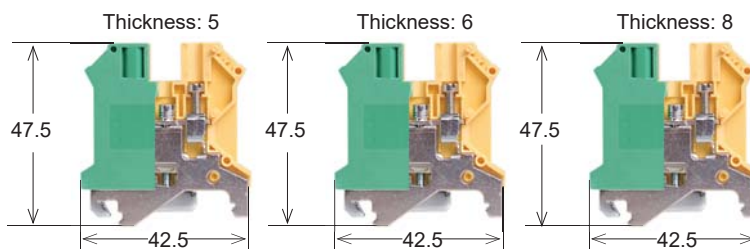

| Model | CPE 2.5N  | CPE 4N  | CPE 6N  |
|------------------|--|--|--|
| UL/CSA | AWG 12-26 | AWG 10-26 | AWG 8-26 |
| IEC | 0.2-2.5mm ² | 0.2-4mm ² | 0.2-6mm ² |
| Torque (lb-in) | 7 | 8.5 | 16 |
| Clamping Screw | M3 | M3 | M4 |
| Stripping length | 10-14mm | 10-14mm | 12-16mm |
| Available colors | Green+Yellow | | |
| Accessories | | | |
| End Bracket | SEW35 CEW35/2 | SEW35 CEW35/2 | SEW35 CEW35/2 |
| Protection Cover | DP1 | | |
| Retaining Plate | AD1 | | |
| Comb Link | CQB 2.5/2, QB 2.5/3, CQB 2.5/10 | CQB 4/2, CQB 4/3, CQB 4/10 | CQB 6/2, CQB 6/3, CQB 6/10 |
| Marking Tags | W5 W5Z W5K W7 W7Z W7K | W6 W6Z W6K W8 W8Z W8K | W6 W6Z W6K W8 W8Z W8K |

Tower Lights

Beacon Lights

LED Indicators
Pilot Lamps

Buzzer Alarms

Pushbutton Switches

Limit Switches

Foot Switches

SSR





Relay & Sockets

Relay Terminal Blocks

Terminal Blocks

Fuse Holders

Enclosures







| Model | CPE 10N |
|------------------|------------------------------|
| UL/CSA Wire Size | AWG 6-16 |
| IEC Wire Size | 0.5-10mm ² |
| Torque (lb-in) | 18 |
| Clamping Screw | M4 |
| Stripping length | 12-16mm |
| Available colors | Green+Yellow |
| Accessories | |
| End Bracket | SEW35 |
| | CEW35/2 |
| Protection Cover | DP1 |
| Retaining Plate | AD1 |
| Comb Link | CQB 10/2, CQB 10/3, CQB 10/4 |
| Marking Tags | W6 W6Z W6K |
| | W8 W8Z W8K |

| Model | CPE 16 |
|------------------|-------------------------------|
| UL/CSA Wire Size | AWG 6-14 |
| IEC Wire Size | 2.5-16mm ² |
| Torque (lb-in) | 35 |
| Clamping Screw | M5 |
| Stripping length | 14-18mm |
| Available colors | Green+Yellow |
| Accessories | |
| End Bracket | SEW35 |
| | CEW35/1 |
| Protection Cover | DP1 |
| Retaining Plate | AD2 |
| Comb Link | CQB 16/2, CQB 16/3, CQB 16/10 |
| Marking Tags | W6 W6Z W6K |
| | W8 W8Z W8K |

| Model | CPE 35 |
|------------------|-------------------------------|
| UL/CSA Wire Size | AWG 2-10 |
| IEC Wire Size | 4-35mm ² |
| Torque (lb-in) | 51 |
| Clamping Screw | M6 |
| Stripping length | 14-18mm |
| Available colors | Green+Yellow |
| Accessories | |
| End Bracket | SEW35 |
| | CEW35/1 |
| Protection Cover | DP1 |
| Retaining Plate | AD2 |
| Comb Link | CQB 35/2, CQB 35/3, CQB 35/10 |
| Marking Tags | W6 W6Z W6K |
| | W8 W8Z W8K |

| Model | CPE 50 |
|------------------|----------------------|
| UL/CSA Wire Size | AWG 1/0-6 |
| IEC Wire Size | 16-50mm ² |
| Torque (lb-in) | 70 |
| Clamping Screw | M6 |
| Stripping length | 20-25mm |
| Available colors | Green+Yellow |
| Accessories | |
| End Bracket | SEW35 |
| | CEW35/1 |
| Protection Cover | - |
| Retaining Plate | - |
| Comb Link | CQB 50/2, CQB 50/3 |
| Marking Tags | W6 W6Z W6K |
| | W8 W8Z W8K |

Screw Clamp Double Level Terminal Blocks



| Model | CDK 2.5 | | |
|------------------|-------------------------------|---------------|------------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| | 600V | 20A | AWG12-22 |
| UL/CSA | 800V | 24A | 0.5-2.5mm ² |
| | IEC | | |
| Torque (lb-in) | 5 | | |
| Clamping Screw | M2.6 | | |
| Stripping length | 6mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP3 | | |
| Cross Jumper | CQV 2.5/2 CQV 2.5/3 | | |
| | CQV 2.5/4 CQV 2.5/10 | | |
| Comb Link | CQB2.5/2, CQB2.5/3, CQB2.5/10 | | |
| Warning Cover | WSS-2.5 | | |
| Marking Tags | W5Z W5K | | |





| Model | CDK 4 | | |
|------------------|-------------------------|---------------|----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| | 600V | 30A | AWG10-22 |
| UL/CSA | 500V | 32A | 0.5-4mm ² |
| | IEC | | |
| Torque (lb-in) | 8 | | |
| Clamping Screw | M3 | | |
| Stripping length | 6mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP3 | | |
| Cross Jumper | CQV 4/2 CQV 4/3 | | |
| | CQV 4/4 CQV 4/10 | | |
| Comb Link | CQB4/2, CQB4/3, CQB4/10 | | |
| Warning Cover | WSS-4 | | |
| Marking Tags | W6Z W6K | | |

| Model | CDK 6 | | |
|------------------|-------------------------|---------------|----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| | 600V | 41A | AWG 8-20 |
| UL/CSA | 500V | 50A | 0.5-6mm ² |
| | IEC | | |
| Torque (lb-in) | 14 | | |
| Clamping Screw | M4 | | |
| Stripping length | 10-12mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP1 | | |
| Cross Jumper | CQV 6/2 CQV 6/3 | | |
| | CQV 6/4 CQV 6/10 | | |
| Comb Link | CQB6/2, CQB6/3, CQB6/10 | | |
| Warning Cover | WSS-6 | | |
| Marking Tags | W6Z W6K | | |

| Model | CDK 10 | | |
|------------------|----------------------------|---------------|-----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| | 600V | 65A | AWG 6-16 |
| UL/CSA | 500V | 76A | 1.5-10mm ² |
| | IEC | | |
| Torque (lb-in) | 19 | | |
| Clamping Screw | M4 | | |
| Stripping length | 10-12mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP1 | | |
| Cross Jumper | CQV 10/2 CQV 10/3 | | |
| | CQV 10/4 CQV 10/10 | | |
| Comb Link | CQB10/2, CQB10/3, CQB10/10 | | |
| Warning Cover | WSS-10 | | |
| Marking Tags | W6Z W6K | | |



Diode Terminal Blocks







| Model | CTR 2.5D | | |
|------------------|----------------------------------|---------------|------------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 2A | AWG12-22 |
| IEC | 400V | 2A | 0.5-2.5mm ² |
| Torque (lb-in) | 4.5 | | |
| Clamping Screw | M3 | | |
| Stripping length | 10-12mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP1 | | |
| Partition | CEP2 | | |
| Comb Link | CQB 2.5/2, CQB 2.5/3, CQB 2.5/10 | | |
| Diode Plug | CSD2.5 | | |
| Marking Tags | W5 W5Z W5K W7 W7Z W7K | | |

| Model | CTR 4D | | |
|------------------|----------------------------|----------------------|-----------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| 600V | 2A | AWG10-22 | |
| 400V | 2A | 0.5-4mm ² | |
| Torque (lb-in) | 6 | | |
| Clamping Screw | M3 | | |
| Stripping length | 10-12mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP1 | | |
| Partition | CEP2 | | |
| Comb Link | CQB 4/2, CQB 4/3, CQB 4/10 | | |
| Diode Plug | CSD4 | | |
| Marking Tags | W6 W6Z W6K W8 W8Z W8K | | |

| Model | CTR 6D | | |
|------------------|----------------------------|----------------------|-----------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| 600V | 3A | AWG12-22 | |
| 500V | 3A | 0.5-6mm ² | |
| Torque (lb-in) | 14 | | |
| Clamping Screw | M4 | | |
| Stripping length | 12-14mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP5 | | |
| Partition | CEP2 | | |
| Comb Link | CQB 6/2, CQB 6/3, CQB 6/10 | | |
| Diode Plug | CSD6 | | |
| Marking Tags | W6 W6Z W6K W8 W8Z W8K | | |

| Model | CTR 10D | | |
|------------------|-------------------------------|-----------------------|-----------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| 600V | 3A | AWG12-22 | |
| 500V | 3A | 1.5-10mm ² | |
| Torque (lb-in) | 19 | | |
| Clamping Screw | M4 | | |
| Stripping length | 12-14mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP5 | | |
| Partition | CEP2 | | |
| Comb Link | CQB 10/2, CQB 10/3, CQB 10/10 | | |
| Diode Plug | CSD10 | | |
| Marking Tags | W6 W6Z W6K W8 W8Z W8K | | |

Screw Clamp Disconnect Terminal Blocks








| Model | CTR 2.5 | | |
|------------------|----------------------------------|---------------|------------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 12A | AWG10-22 |
| IEC | 500V | 15A | 0.5-2.5mm ² |
| Torque (lb-in) | 4.5 | | |
| Clamping Screw | M3 | | |
| Stripping length | 10-12mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP1 | | |
| Comb Link | CQB 2.5/2, CQB 2.5/3, CQB 2.5/10 | | |
| Diode Plug | CSD2.5 | | |
| Marking Tags | W5 W5Z W5K W7 W7Z W7K | | |

| Model | CTR 4 | | |
|------------------|----------------------------|----------------------|-----------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| 600V | 12A | AWG10-22 | |
| 500V | 15A | 0.5-4mm ² | |
| Torque (lb-in) | 6 | | |
| Clamping Screw | M3 | | |
| Stripping length | 10-12mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP1 | | |
| Comb Link | CQB 4/2, CQB 4/3, CQB 4/10 | | |
| Diode Plug | CSD4 | | |
| Marking Tags | W6 W6Z W6K W8 W8Z W8K | | |

| Model | CTR 6 | | |
|------------------|----------------------------|----------------------|-----------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| 600V | 24A | AWG12-22 | |
| 630V | 24A | 0.5-6mm ² | |
| Torque (lb-in) | 14 | | |
| Clamping Screw | M4 | | |
| Stripping length | 12-14mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP5 | | |
| Comb Link | CQB 6/2, CQB 6/3, CQB 6/10 | | |
| Diode Plug | CSD6 | | |
| Marking Tags | W6 W6Z W6K W8 W8Z W8K | | |

| Model | CTR 10 | | |
|------------------|-------------------------------|-----------------------|-----------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| 600V | 24A | AWG12-22 | |
| 630V | 24A | 1.5-10mm ² | |
| Torque (lb-in) | 19 | | |
| Clamping Screw | M4 | | |
| Stripping length | 12-14mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | CEW35/2 | | |
| | SEW35 | | |
| End Cover | CEP5 | | |
| Comb Link | CQB 10/2, CQB 10/3, CQB 10/10 | | |
| Diode Plug | CSD10 | | |
| Marking Tags | W6 W6Z W6K W8 W8Z W8K | | |

Spring Clamp Terminal Blocks








| Model | SDU2.5 | | |
|------------------|--------------------|---------------|------------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 18A | AWG12-28 |
| IEC | 800V | 24A | 0.2-2.5mm ² |
| Stripping length | 8-9mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP1 | | |
| Comb Link | SQV2.5/2, SQV2.5/3 | | |
| Marking Tags | W5 W5Z W5K | | |

| Model | SDU2.5/3 | | |
|------------------|--------------------|---------------|------------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 18A | AWG12-28 |
| IEC | 800V | 24A | 0.2-2.5mm ² |
| Stripping length | 8-9mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP2 | | |
| Comb Link | SQV2.5/2, SQV2.5/3 | | |
| Marking Tags | W5 W5Z W5K | | |

| Model | SDU2.5/4 | | |
|------------------|--------------------|---------------|------------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 18A | AWG12-28 |
| IEC | 800V | 24A | 0.2-2.5mm ² |
| Stripping length | 8-9mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP3 | | |
| Comb Link | SQV2.5/2, SQV2.5/3 | | |
| Marking Tags | W5 W5Z W5K | | |

| Model | SDU4 | | |
|------------------|----------------|---------------|----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 20A | AWG12-28 |
| IEC | 800V | 32A | 0.2-4mm ² |
| Stripping length | 9-10mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP4 | | |
| Comb Link | SQV4/2, SQV4/3 | | |
| Marking Tags | W6 W6Z W6K | | |

| Model | SDU4/3 | | |
|------------------|----------------|---------------|----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 20A | AWG12-28 |
| IEC | 800V | 32A | 0.2-4mm ² |
| Stripping length | 9-10mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP5 | | |
| Comb Link | SQV4/2, SQV4/3 | | |
| Marking Tags | W6 W6Z W6K | | |







| Model | SDU4/4 | | |
|------------------|----------------|---------------|----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 20A | AWG12-28 |
| IEC | 800V | 32A | 0.2-4mm ² |
| Stripping length | 9-10mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP6 | | |
| Comb Link | SQV4/2, SQV4/3 | | |
| Marking Tags | W6 W6Z W6K | | |

| Model | SDU6 | | |
|------------------|----------------|---------------|----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 30A | AWG10-24 |
| IEC | 800V | 41A | 0.2-6mm ² |
| Stripping length | 12-13mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP7 | | |
| Comb Link | SQV6/2, SQV6/3 | | |
| Marking Tags | W6 W6Z W6K | | |

| Model | SDU6/3 | | |
|------------------|----------------|---------------|----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 30A | AWG 10-24 |
| IEC | 800V | 41A | 0.2-6mm ² |
| Stripping length | 12-13mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP8 | | |
| Comb Link | SQV6/2, SQV6/3 | | |
| Marking Tags | W6 W6Z W6K | | |

| Model | SDU10 | | |
|------------------|------------------|---------------|-----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 38A | AWG 8-24 |
| IEC | 800V | 57A | 0.2-10mm ² |
| Stripping length | 15-16mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP9 | | |
| Comb Link | SQV10/2, SQV10/3 | | |
| Marking Tags | W6 W6Z W6K | | |

| Model | SDU10/3 | | |
|------------------|------------------|---------------|-----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 38A | AWG 8-24 |
| IEC | 800V | 57A | 0.2-10mm ² |
| Stripping length | 15-16mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP10 | | |
| Comb Link | SQV10/2, SQV10/3 | | |
| Marking Tags | W6 W6Z W6K | | |



| Model | SDU16 | | |
|------------------|---------------|---------------|-----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 60A | AWG4-14 |
| IEC | 1000V | 76A | 1.5-16mm ² |
| Stripping length | 16-17mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP12 | | |
| Comb Link | SQV16/2 | | |
| Marking Tags | W6 W6Z W6K | | |


| Model | SDU16/3 | | |
|------------------|---------------|---------------|-----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 60A | AWG4-14 |
| IEC | 1000V | 76A | 1.5-16mm ² |
| Stripping length | 16-17mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP13 | | |
| Comb Link | SQV16/2 | | |
| Marking Tags | W6 W6Z W6K | | |

| Model | SDU35 | | |
|------------------|---------------|---------------|-----------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 120A | AWG 2-12 |
| IEC | 800V | 125A | 2.5-35mm ² |
| Stripping length | 25mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP14 | | |
| Comb Link | SQV35/2 | | |
| Marking Tags | W6 W6Z W6K | | |


| Model | SDK2.5 | | |
|------------------|--------------------|---------------|------------------------|
| Technical Data | Rated Voltage | Rated Current | Wire Size |
| UL/CSA | 600V | 20A | AWG 14-28 |
| IEC | 800V | 24A | 0.2-2.5mm ² |
| Stripping length | 8-9mm | | |
| Available colors | Beige | | |
| Accessories | | | |
| End Bracket | SEW35 | | |
| End Cover | SEP11 | | |
| Comb Link | SQV2.5/2, SQV2.5/3 | | |
| Marking Tags | W5 W5Z W5K | | |

Spring Clamp Double Level Terminal Blocks


Spring Clamp Ground Terminal Blocks

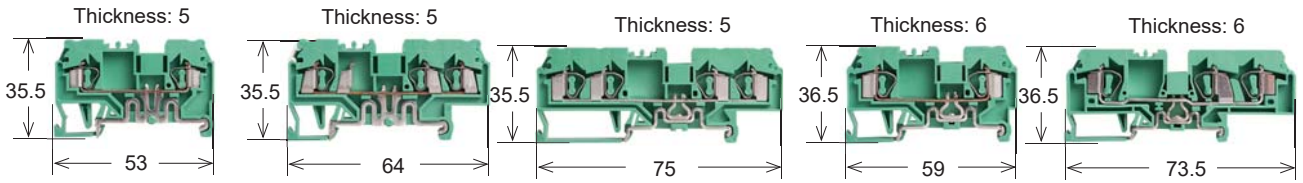

| Model | SPE2.5 | SPE2.5/3 | SPE2.5/4 | SPE4 | SPE4/3 |
|------------------|------------------------|------------------------|------------------------|----------------------|----------------------|
| UL/CSA Wire Size | AWG 12-28 | AWG 12-28 | AWG 12-28 | AWG 12-28 | AWG 12-28 |
| IEC Wire Size | 0.2-2.5mm ² | 0.2-2.5mm ² | 0.2-2.5mm ² | 0.2-4mm ² | 0.2-4mm ² |
| Stripping length | 8-9mm | 8-9mm | 8-9mm | 9-10mm | 9-10mm |
| Available colors | Green | Green | Green | Green | Green |
| Accessories | | | | | |
| End Bracket | SEW35 | SEW35 | SEW35 | SEW35 | SEW35 |
| End Cover | SEP1 | SEP2 | SEP3 | SEP4 | SEP5 |
| Comb Link | SQV2.5/2, SQV2.5/3 | SQV2.5/2, SQV2.5/3 | SQV2.5/2, SQV2.5/3 | SQV4/2, SQV4/3 | SQV4/2, SQV4/3 |
| Marking Tags | W5 W5Z W5K | W5 W5Z W5K | W5 W5Z W5K | W6 W6Z W6K | W6 W6Z W6K |

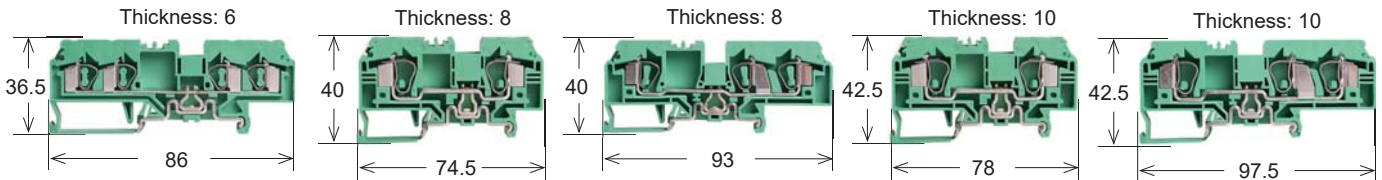

| Model | SPE4/4 | SPE6 | SPE6/3 | SPE10 | SPE10/3 |
|------------------|----------------------|----------------------|----------------------|-----------------------|-----------------------|
| UL/CSA Wire Size | AWG 12-28 | AWG 10-24 | AWG 10-24 | AWG 8-24 | AWG 8-24 |
| IEC Wire Size | 0.2-4mm ² | 0.2-6mm ² | 0.2-6mm ² | 0.2-10mm ² | 0.2-10mm ² |
| Stripping length | 9-10mm | 12-13mm | 12-13mm | 15-16mm | 15-16mm |
| Available colors | Green | Green | Green | Green | Green |
| Accessories | | | | | |
| End Bracket | SEW35 | SEW35 | SEW35 | SEW35 | SEW35 |
| End Cover | SEP6 | SEP7 | SEP8 | SEP9 | SEP10 |
| Comb Link | SQV4/2, SQV4/3 | SQV6/2, SQV6/3 | SQV6/2, SQV6/3 | SQV10/2, SQV10/3 | SQV10/2, SQV10/3 |
| Marking Tags | W6 W6Z W6K | W6 W6Z W6K | W6 W6Z W6K | W6 W6Z W6K | W6 W6Z W6K |

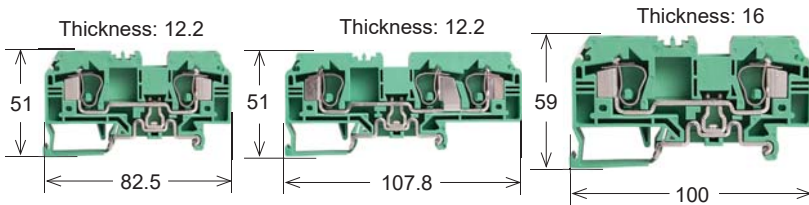

| Model | SPE16 | SPE16/3 | SPE35 |
|------------------|-----------------------|-----------------------|-----------------------|
| UL/CSA Wire Size | AWG 4-14 | AWG 4-14 | AWG 2-12 |
| IEC Wire Size | 1.5-16mm ² | 1.5-16mm ² | 2.5-35mm ² |
| Stripping length | 16-17mm | 16-17mm | 25mm |
| Available colors | Green | Green | Green |
| Accessories | | | |
| End Bracket | SEW35 | SEW35 | SEW35 |
| End Cover | SEP12 | SEP13 | SEP14 |
| Comb Link | SQV16/2 | SQV16/2 | SQV35/2 |
| Marking Tags | W6 | W6 | W6 |

Accessories

Terminal Rails



| TS-37 | TS-31 | KTB2-CHB | TS-15 |
|------------|-----------|------------|-------------|
| 35 x 7.5mm | 35 x 15mm | 35 x 7.5mm | 15 x 5.5 mm |
| Steel | Steel | Aluminum | Steel |

Protection Cover



| DP1 |
|--|
| CDU2.5 CDU4 CDU6 CDU10 CDU16 CDU35 |
| CDK2.5 CDK4 |
| CDE2.5 CDE4 CDE6 CDE10 CDE16 CDE35 |
| CTR2.5 CTR2.5D CTR4 CTR4D CTR6 CTR6D CTR10 CTR10D |

End Brackets (D X W X H)



| CEW15 | CEW35/1 | CEW35/2 | SEW35 |
|------------------|----------------------------|---|---|
| 8 X 28 X 30.7 | 12 X 56 X 63 | 8 X 56 X 47 | 6 X 56 X 42 |
| CDU2.5M CDU4M | CDU16 CDU35 CDU50 CDU95 | CDU2.5N CDU4N CDU6N CDU10N | CDK2.5 CDK4 CDK6 CDK10 |
| | CPE16 CPE35 CPE50 | CDK2.5 CDK4 CDK6 CDK10 | CTR2.5 CTR2.5D CTR4 CTR4D CTR6 CTR6D CTR10 CTR10D CTR4SI/EN |
| | | CTR2.5 CTR2.5D CTR4 CTR4D CTR6 CTR6D CTR10 CTR10D CTR4SI/EN | SPE2.5 SPE2.5/3 SPE2.5/4 SPE4 SPE4/3 SPE4/4 SPE6 SPE6/3 SPE10 SPE10/3 |
| | | | SDU2.5 SDU2.5/3 SDU2.5/4 SDU4 SDU4/3 SDU4/4 SDU6 SDU6/3 SDU10 SDU10/3 |

End Covers/Partitions (W X H)



| CEP1 | CEP2 | CEP3 | CEP4 | CEP5 | CEP6 | CEP7 |
|------------------------------|---|-------------|------------|---|-------------------------------|------------------|
| 55.5 X 35.5 | 55.5 X 51 | 69 X 51.5 | 78 X 61 | 56.5 X 35.5 | 40 X 36 | 27.5 X 26 |
| CTR2.5 CTR2.5D CTR4 CTR4D | CDU16 CDU35 CTR2.5 CTR2.5D CTR4 CTR4D | CDK2.5 CDK4 | CDK6 CDK10 | CTR2.5 CTR4 CTR6 CTR6D CTR10 CTR10D | CDU2.5N CDU4N CDU6N CDU10N | CDU2.5M CDU4M |

End Plates



| SEP1 | SEP2 | SEP3 | SEP4 | SEP5 | SEP6 | SEP7 | SEP8 | SEP9 | SEP10 | SEP11 | SEP12 |
|------------------|----------------------|----------------------|--------------|------------------|------------------|--------------|------------------|----------------|--------------------|--------|-------|
| SDU2.5 SPE2.5 | SDU2.5/3 SPE2.5/3 | SDU2.5/4 SPE2.5/4 | SDU4 SPE4 | SDU4/3 SPE4/3 | SDU4/4 SPE4/4 | SDU6 SPE6 | SDU6/3 SPE6/3 | SDU10 SPE10 | SDU10/3 SPE10/3 | SDK2.5 | SDU16 |

Warning Covers



| WS-16 | WS-35 | WSS-2.5 |
|-------|-------|---------|
| CDU16 | CDU35 | CDK2.5 |
| WSS-4 | WSS-6 | WSS-10 |
| CDK4 | CDK6 | CDK10 |



Diode Plugs

| Type | CSD2.5 | CSD4 | CSD6 | CSD10 |
|-----------------|-------------------|---------------|---------------|-----------------|
| Electric Rating | 2A600V | 2A600V | 3A600V | 3A600V |
| Terminal Type | CTR2.5 CTR2.5D | CTR4 CTR4D | CTR6 CTR6D | CTR10 CTR10D |

Retaining Plate



| AD 1 | AD 2 |
|---------------------------|-------------------------------|
| 3 X 56.5 X 58 | 3.5 X 56.5 X 74 |
| CDU2.5 CDU4 CDU6 CDU10 | CDU16 CDU35 |
| CPE2.5 CPE4 CPE6 CPE10 | CPE16 CPE35 |
| CTR2.5 CTR4 CTR6 CTR10 | CTR2.5D CTR4D CTR6D STR10D |
| | CTK2.5 CTK4 |

Cross Jumpers



| Type | CQV-16 | CQV-35 | CQV-50 | CQV-95 | CQVM-2.5 | CQVM-4 |
|---------------|---------|---------|--------|--------|-------------|-------------|
| Pole | 2, 3, 4 | 2, 3, 4 | 2, 3 | - | 3, 3, 4, 10 | 2, 3, 4, 10 |
| Terminal Type | CDU16 | CDU35 | CDU50 | CDU95 | CDU2.5M | CDU4M |