

O200.GR-PV1Z.72CV/BX30

Diffuse sensors with background suppression - miniature

Article number: 11210540

Overview

- Outstanding reliability and unrivalled immunity against ambient light
- Reproducible and color-independent switching distances
- Fixed preset for the simplest commissioning
- Robust housing with stainless steel spacer sleeves



Picture similar



Technical data

General data

Type	Background suppression
Light source	Pulsed red LED
Sensing distance Tw	30 mm
Sensing range Tb	7 ... 30 mm
Smallest object recognizable typ.	0,25 mm at 30 mm
Alignment / soiled lens indicator	Flashing output indicator
Power on indication	LED green
Output indicator	LED yellow
Sensing distance adjustment	No
Wave length	644 nm
Suppression of reciprocal influence	Yes
Alignment optical axis	< 1,5°

Electrical data

Response time / release time	< 1 ms
Voltage supply range +Vs	10 ... 30 VDC
Current consumption max. (no load)	20 mA (@ 30 VDC)

Electrical data

Current consumption typ.	16 mA (@ 24 VDC)
Voltage drop Vd	< 2 VDC
Output function	Light / dark operate
Output circuit	PNP complementary
Output current	< 50 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

Mechanical data

Width / diameter	8 mm
Height / length	25,1 mm
Depth	14,1 mm
Type	Rectangular
Mechanical mounting	Sleeve smooth (stainless steel)
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Cable 4 pin, 2 m
Cable characteristics	PVC / PVC 4 x 0,08 mm ²

Ambient conditions


Protection class	IP 67
Operating temperature	-25 ... +50 °C

O200.GR-PV1Z.72CV/BX30


Diffuse sensors with background suppression - miniature

Article number: 11210540


Dimension drawing



Connection diagram

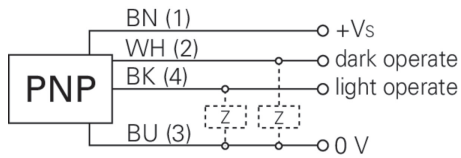

Beam characteristic (typically)

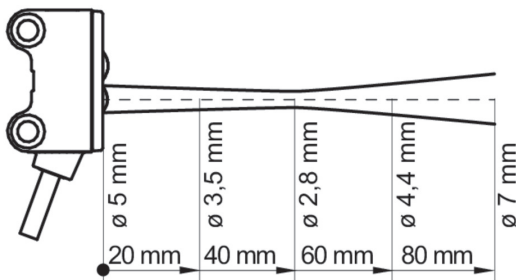

Sensing distance diagram

