

O200.GR.F-NV1Z.72NV/H006_BX15

Diffuse sensors with background suppression - miniature

Article number: 11212628

Overview

- Outstanding reliability and unrivalled immunity against ambient light
- V-optics for detection of shiny or transparent objects
- Reproducible and color-independent switching distances
- Fixed preset for the simplest commissioning
- Quick mounting by means of M3 threaded bushes made of stainless steel



Picture similar



Technical data

General data

Type	Background suppression
Version	Fixed focus
Light source	Pulsed red LED
Sensing distance Tw	15 mm
Sensing range Tb	3 ... 15 mm
Smallest object recognizable typ.	0,05 mm at 10 mm
Alignment / soiled lens indicator	Flashing output indicator
Power on indication	LED green
Output indicator	LED yellow
Sensing distance adjustment	No
Wave length	644 nm
Suppression of reciprocal influence	Yes
Alignment optical axis	< 1,5°

Electrical data

Response time / release time	< 1 ms
Voltage supply range +Vs	10 ... 30 VDC
Current consumption max. (no load)	20 mA (@ 30 VDC)

Electrical data

Current consumption typ.	16 mA (@ 24 VDC)
Voltage drop Vd	< 2 VDC
Output function	Light / dark operate
Output circuit	NPN complementary
Output current	< 50 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

Mechanical data

Width / diameter	8 mm
Height / length	25,1 mm
Depth	14,1 mm
Type	Rectangular
Mechanical mounting	Threaded sleeves M3 (stainless steel)
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Flylead connector M8 4 pin, L=200 mm
Cable characteristics	PVC / PVC 4 x 0,08 mm ²

Ambient conditions


Protection class	IP 67
Operating temperature	-25 ... +50 °C

O200.GR.F-NV1Z.72NV/H006_BX15


Diffuse sensors with background suppression - miniature

Article number: 11212628


Dimension drawing

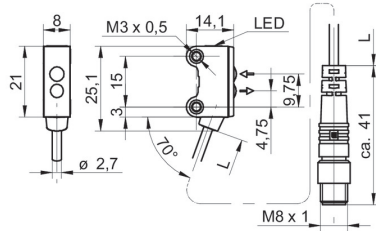


Sensing distance diagram

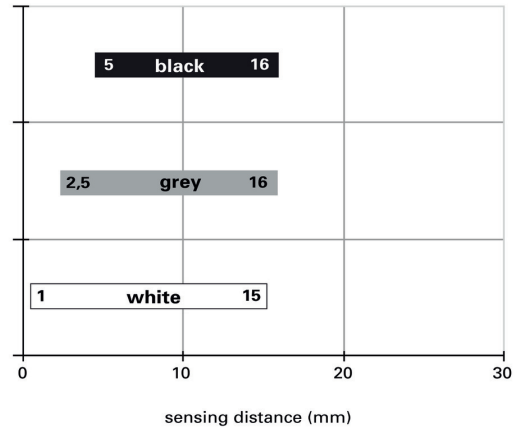

Connection diagram

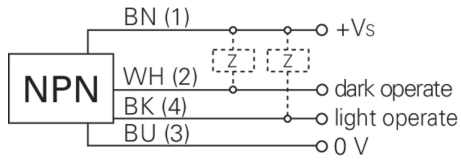

Pin assignment



Beam characteristic (typically)

