

Overview

- Outstanding reliability and unrivalled immunity against ambient light
- qTeach - tamper-proof, simple teach-in with ferromagnetic tool
- Intuitive Xpress Teach / 1-Step Teach method
- Quick mounting by means of M3 threaded bushes made of stainless steel



Picture similar




Technical data

General data		Electrical data	
Type	Background suppression	Current consumption typ.	16 mA (@ 24 VDC)
Light source	Pulsed red LED	Voltage drop Vd	< 2 VDC
Sensing distance Tw	15 ... 72 mm	Output function	Light / dark operate
Sensing range Tb	7 ... 80 mm	Output circuit	PNP complementary
Smallest object recognizable typ.	0,25 mm at 40 mm	Output current	< 50 mA
Alignment / soiled lens indicator	Flashing output indicator	Short circuit protection	Yes
Power on indication	LED green	Reverse polarity protection	Yes
Output indicator	LED yellow	Mechanical data	
Sensing distance adjustment	qTeach / 1-Step Teach-in	Width / diameter	8 mm
Wave length	644 nm	Height / length	25,1 mm
Suppression of reciprocal influence	Yes	Depth	14,1 mm
Alignment optical axis	< 1,5°	Type	Rectangular
Electrical data		Mechanical mounting	Threaded sleeves M3 (stainless steel)
Response time / release time	< 0,5 ms	Housing material	Plastic (ASA, PMMA)
Voltage supply range +Vs	10 ... 30 VDC	Front (optics)	PMMA
Current consumption max. (no load)	40 mA (@ 10 VDC)	Connection types	Cable 4 pin, 2 m
		Cable characteristics	PVC / PVC 4 x 0,08 mm ²
		Ambient conditions	
		Protection class	IP 67
		Operating temperature	-25 ... +50 °C


Remarks

- qTeach


Dimension drawing

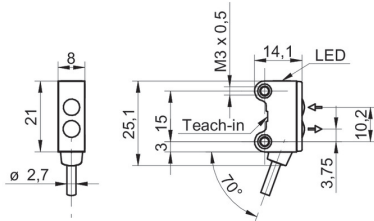


Hysteresis curve

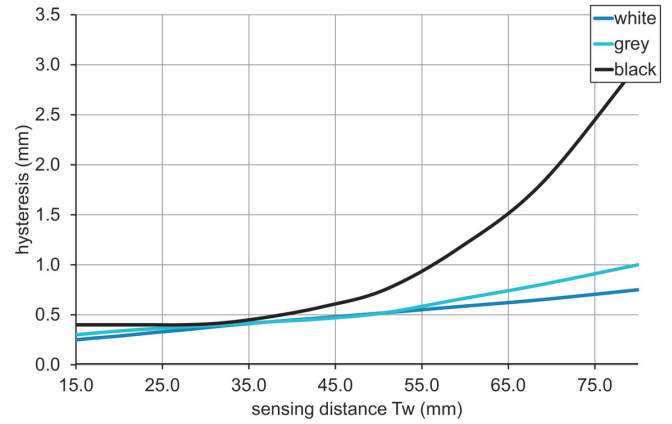

Connection diagram

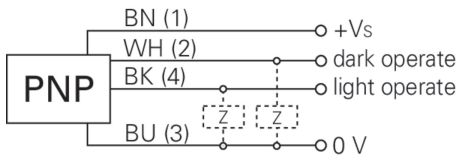

Beam characteristic (typically)

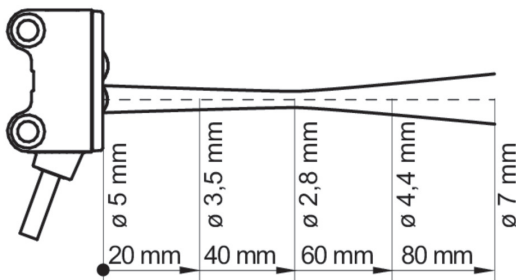

Sensing distance diagram

