

STAINLESS STEEL FREE-STANDING ENCLOSURES

Application

Designed to house a variety of electrical and electronic controls and instruments. Provisions for optional surface mounting or rack mounting of almost any type of equipment. Provides a degree of protection from dust, dirt, water and oil. The enclosures are extra deep for applications requiring more interior space.

Construction

- 0.104" stainless steel Type 304.
- Removable and interchangeable doors.
- Stainless steel concealed hinges.
- Seams continuously welded and ground smooth.
- Strong, rigid construction with stiffeners welded on backs of single access boxes.
- Lifting eyes for easy handling.
- Black zinc die cast keylocking/padlocking handle.
- 3-point latching mechanism.
- Latch rods have ramp shoes for easier door closing.
- Flange trough collar around all sides of door opening.
- Removable print pocket provided on door with 3-point latch.
- Mounting channels welded horizontally on sides of interior body at top, bottom and middle for mounting optional panels or rack mounting angles.
- Pour in place oil and water resistant gasket.
- Ground stud on door and body.
- Provisions for light kit.

Finish

#4 brushed finish on all exterior surfaces. Optional sub-panels powder coated white.

Accessories - See page 146-153

IS3 Industry Standards

NEMA Type 3R, 12 & Type 13
UL Listed Type 3R & 12
CSA Type 3R & 12
IEC 60529 IP55

***To maintain Type 3R listing, Drainage is required. Install equally rated drainage device or drill a 1/8 to 1/4 inch hole in the bottom center of the enclosure, approximately 1 inch from the right, and 1 inch from the left for drainage, use listed rain-tight or wet location hubs.


Enclosure Product Code S2

Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard
SCE-604818SSFSD	60.00	48.00	18.00	IS3
SCE-724818SSFSD	72.00	48.00	18.00	IS3
SCE-724824SSFSD	72.00	48.00	24.00	IS3
SCE-726018SSFSD	72.00	60.00	18.00	IS3
SCE-726024SSFSD	72.00	60.00	24.00	IS3
SCE-726036SSFSD	72.00	60.00	36.00	IS3
SCE-727218SSFSD	72.00	72.00	18.00	IS3
SCE-727224SSFSD	72.00	72.00	24.00	IS3
SCE-904820SSFSD	90.00	48.00	20.00	IS3
SCE-907220SSFSD	90.00	72.00	20.00	IS3
SCE-907224SSFSD	90.00	72.00	24.00	IS3
SCE-907236SSFSD	90.00	72.00	36.00	IS3



STAINLESS STEEL FREE-STANDING ENCLOSURES

TECHNICAL DATA

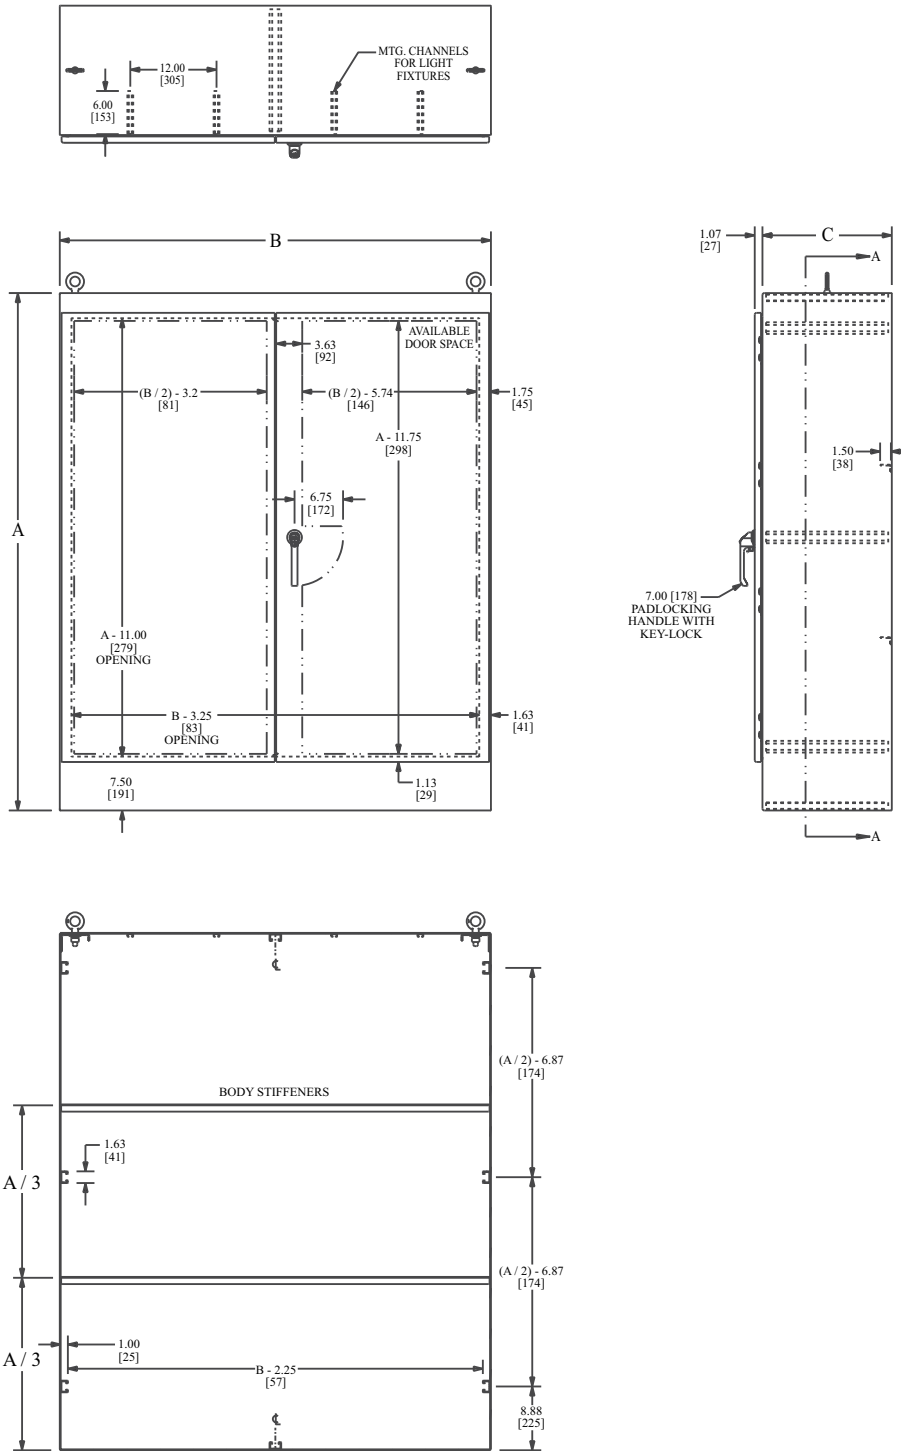

SECTION A-A